


TPE series has low ESR and can aid in creating thinner and smaller products.
This page focuses on the smaller packages within the series.



Specifications

Items	Condition		Specifications					
Rated voltage (V)	—		2.0	2.5	4.0	6.3	8.0	10
Surge voltage (V)	—		2.3	2.9	4.6	7.2	9.2	12
Category temperature range (°C)	—		−55 to +105					
Capacitance tolerance (%)	120Hz/20°C		M : ±20					
Rated capacitance range (μF)	120Hz/20°C		47 to 470					
Dissipation Factor (DF)	120Hz/20°C		Please see the attached characteristics list					
Leakage current	Rated voltage applied, after 5 minutes		Please see the attached characteristics list					
Equivalent series resistance (ESR)	100kHz/20°C		Please see the attached characteristics list					
Characteristics of impedance ratio at high temp. and low temp.	100kHz/+20°C	−55°C	Z/Z _{20°C}	0.6 to 2.0				
		+105°C	Z/Z _{20°C}	0.6 to 2.0				
Endurance	105°C, 1,000h rated voltage applied ※Rated temp. 85°C products: 85°C, 1,000h, rated voltage applied	ΔC/C		Within±20% of the initial value				
		DF		≤ 1.5 times of the initial limit				
		LC		Within the initial limit				
Damp heat (Steady State)	60°C, 90 to 95%RH, 500h, No-applied voltage	ΔC/C		Within+50%, −20% (2R5TPE220MDGB(MAZB,MAPB,MAFB), 2R5TPE330MAZB,2TPE330MFB(MAFB,MADGB) ETPE330MA9GB,2TPE470MAJGB)				
		ΔC/C		Within+40%, −20% of the initial value (Except for the above model)				
		DF		≤ 1.5 times of the initial limit				
		LC		≤ 3 times of the initial limit				
Surge	105°C, 1,000 cycles, 1kΩ discharge resistance,surge voltage applied ※Rated temp 85°C products:85°C	ΔC/C		Within±5% of the initial value				
		DF		Within the initial limit				
		LC		≤ 3 times of the initial limit				

Dimensions

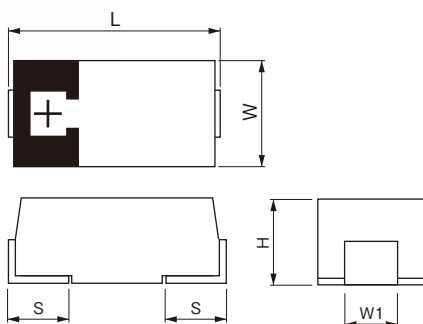

(unit: mm)

Size code	L ±0.2	W ±0.2	H ±0.1	S ±0.2	W1 ±0.1
B2	3.5	2.8	1.9	0.8	2.2

Size list

RV : Rated voltage

RV μF	2.0	2.5	4.0	6.3	8.0	10
47						B2
100			B2	B2	B2	
120				B2		
150			B2	B2		
220		B2	B2	B2		
330	B2	B2				
470	B2					

 TPE series characteristics list

Size code	Part number	Rated voltage (V)	Rated temperature (°C)	Rated capacitance (μF)	Category voltage (V)	Category temperature (°C)	DF (% max)	LC (μA) max/5min.	ESR (mΩmax) 100kHz/20°C	Maximum allowable ripple current (mA rms) 100kHz※1	MSL	
											Reflow temp. ≤ 260°C	Reflow temp. ≤ 250°C
B2	10TPE47MAZB	10	85	47	8.0	105	8.0	47.0	35	1400	3	3
	8TPE100MAZB	8.0	85	100	6.3	105	8.0	80.0	35	1400	3	3
	6TPE220MAZB	6.3	85	220	5.0	105	10.0	138.6	35	1400	3	3
	6TPE220MAPB※2	6.3	85	220	5.0	105	10.0	138.6	25	1400	3	3
	6TPE150MAZB	6.3	85	150	5.0	105	8.0	94.5	35	1400	3	3
	6TPE150MAPB	6.3	85	150	5.0	105	8.0	94.5	25	1600	3	3
	6TPE120MAZB	6.3	85	120	5.0	105	8.0	75.6	35	1400	3	3
	6TPE100MPB	6.3	105	100	6.3	105	8.0	63.0	25	1600	3	3
	6TPE100MAZB	6.3	85	100	5.0	105	8.0	63.0	35	1400	3	3
	4TPE220MAZB	4.0	85	220	3.2	105	8.0	88.0	35	1400	3	3
	4TPE150MAZB	4.0	85	150	3.2	105	8.0	60.0	35	1400	3	3
	4TPE150MAUB	4.0	85	150	3.2	105	8.0	60.0	30	1500	3	3
	4TPE100MZB	4.0	105	100	4.0	105	8.0	40.0	35	1400	3	3
	2R5TPE330MAZB	2.5	85	330	2.0	105	8.0	82.5	35	1400	3	3
	ETPE330MA9GB※2	2.5	85	330	2.0	105	8.0	165.0	9/300kHz	3200	3	3
	2R5TPE220MZB	2.5	105	220	2.5	105	8.0	55.0	35	1400	3	3
	2R5TPE220MLB	2.5	105	220	2.5	105	8.0	55.0	21	1700	3	3
	2R5TPE220MFGB	2.5	105	220	2.5	105	8.0	110.0	15/300kHz	1800	3	3
	2R5TPE220MDGB	2.5	105	220	2.5	105	8.0	110.0	13/300kHz	2000	3	3
	2R5TPE220MAZB	2.5	85	220	2.0	105	8.0	55.0	35	1400	3	3
	2R5TPE220MAPB	2.5	85	220	2.0	105	8.0	55.0	25	1600	3	3
	2R5TPE220MAFB	2.5	85	220	2.0	105	8.0	110.0	15	2000	3	3
	2TPE470MAJGB	2.0	85	470	1.8	105	10.0	188.0	11/300kHz	2300	3	3
	2TPE330MFB	2.0	105	330	2.0	105	8.0	132.0	15	2000	3	3
	2TPE330MAFB	2.0	85	330	1.8	105	8.0	132.0	15	2000	3	3
	2TPE330MADGB	2.0	85	330	1.8	105	8.0	132.0	13/300kHz	2000	3	3

※1 100k to 500kHz, 45°C ※2 Under development

Selection guide	Series system diagram
	Image of case size
	Products list
	Packing specifications (SMD type)

Technical data	Recommended soldering condition
	Fundamental structure
	Characteristics
	Reliability

Surface mount type	SVPF
	SVPE
	SVPS
	SVPD
	SVPC
	SVPB
	SVPA
	SVQP
	SVP

Radial lead type	SEPF
	SEPC
	SEQP
	SEP

Catalog Deletion and EOL series

POSCAPPOSCAP
Line-upGuidelines and
precautions for use

Selection guide	Series system diagram
	Image of case size
	Products list
	Explanation of part numbers

Technical data	Marking
	Recommended land pattern dimension
	Recommended soldering condition
	Fundamental structure
	Characteristics

Surface mount type	TPU
	TPH
	TPG
	TPSF
	TPE
	TPB/TPC
	TPL·TPLF
	TPF
	TA
	TV

Catalog Deletion and EOL models


TPE series has low ESR and can aid in creating thinner and smaller products.



Specifications

Items	Condition		Specifications			
Rated voltage (V)	—		2.5	4.0	6.3	10
Surge voltage (V)	—		2.9	4.6	7.2	12
Category temperature range (°C)	—		−55 to +105			
Capacitance tolerance (%)	120Hz/20°C		M : ±20			
Rated capacitance range (μF)	120Hz/20°C		68 to 1,500			
Dissipation Factor (DF)	120Hz/20°C		Please see the attached characteristics list			
Leakage current	Rated voltage applied, after 5 minutes		Please see the attached characteristics list			
Equivalent series resistance (ESR)	100kHz/20°C		Please see the attached characteristics list			
Characteristics of impedance ratio at high temp. and low temp.	100kHz/+20°C	−55°C	Z/Z _{20°C}	0.6 to 2.0		
		+105°C	Z/Z _{20°C}	0.6 to 2.0		
Endurance	105°C, 2,000h, rated voltage applied ※Rated temp. 85°C products: 85°C, 1,000h, rated voltage applied 6TPE330MAP, 6TPE470MAZU: 85°C, 2,000h	ΔC/C		Within ±20% of the initial value		
		DF		≤ 1.5 times of the initial limit		
		LC		Within the initial limit		
Damp heat (Steady State)	60°C, 90 to 95%RH, 500h, No-applied voltage	ΔC/C		Within +50%, −20% of the initial value (2R5TPE470M (I.F.C.9.7), 2R5TPE330M (I.F.C.9.7), 2R5TPE220M (I.F.C.9.7), 2R5TPE1000M (I.F), 2R5TPE1500M (F.C))		
				Within +40%, −20% of the initial value (Except for the above model)		
		DF		≤ 1.5 times of the initial limit		
Surge	105°C, 1,000 cycles, 1kΩ discharge resistance, surge voltage applied ※Rated temp. 85°C products: 85°C	ΔC/C		Within ±5% of the initial value		
		DF		Within the initial limit		
		LC		≤ 3 times of the initial limit		

Dimensions

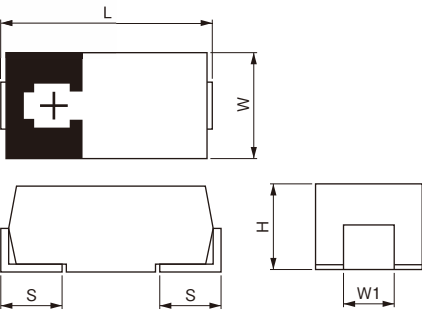

(unit: mm)

Size code	L ±0.3	W ±0.2	H ±0.2*1	S ±0.2	W1 ±0.1
D15E	7.3	4.3	1.4	1.1	2.4
D2E	7.3	4.3	1.8	1.3	2.4
D3L	7.3	4.3	2.8	1.3	2.4
D4	7.3	4.3	3.8	1.3	2.4

※ 1 ±0.1: D2E, D15E

Size list

RV : Rated voltage

μF \ RV	2.5	4.0	6.3	10.0
68				D2E
100			D2E	
150		D2E	D2E	
220	D2E	D2E	D2E	D3L
330	D2E	D2E	D2E, D3L, D4	D4
470	D2E	D3L	D4, D15E	
680	D3L		D4	
1,000	D4			
1,500	D4			

Size code	Part number	Rated voltage (V)	Rated temperature (°C)	Rated capacitance (μF)	Category voltage (V)	Category temperature (°C)	DF (% max)	LC (μA) max/5min.	ESR (mΩmax) 100kHz/20°C	Maximum allowable ripple current (mA rms) 100kHz※1	MSL	
											Reflow temp. ≤ 260°C	Reflow temp. ≤ 250°C
D15E	6TPE470MAZU	6.3	85	470	5.0	105	10	296.1	35	1700	3	2a
	10TPE68M	10	105	68	10	105	10	68.0	25	2400	3	2a
	6TPE330MAP	6.3	85	330	5.0	105	10	207.9	25	2400	3	2a
	6TPE220MAP	6.3	85	220	5.0	105	10	138.6	25	2400	3	2a
	6TPE220M	6.3	105	220	6.3	105	10	138.6	25	2400	3	2a
	6TPE220MI	6.3	105	220	6.3	105	10	138.6	18	2800	3	2a
	6TPE150M	6.3	105	150	6.3	105	10	94.5	25	2400	3	2a
	6TPE150MI	6.3	105	150	6.3	105	10	94.5	18	2800	3	2a
	6TPE150MF	6.3	105	150	6.3	105	10	94.5	15	3100	3	2a
	6TPE100M	6.3	105	100	6.3	105	10	63.0	25	2400	3	2a
	6TPE100MI	6.3	105	100	6.3	105	10	63.0	18	2800	3	2a
	4TPE330M	4.0	105	330	4.0	105	10	132.0	25	2400	3	2a
	4TPE330MI	4.0	105	330	4.0	105	10	132.0	18	2800	3	2a
	4TPE220M	4.0	105	220	4.0	105	10	88.0	25	2400	3	2a
	4TPE220MI	4.0	105	220	4.0	105	10	88.0	18	2800	3	2a
D2E	4TPE220MF	4.0	105	220	4.0	105	10	88.0	15	3100	3	2a
	4TPE150MI	4.0	105	150	4.0	105	10	60.0	18	2800	3	2a
	2R5TPE470MI	2.5	105	470	2.5	105	10	117.5	18	2800	3	2a
	2R5TPE470MF	2.5	105	470	2.5	105	10	117.5	15	3100	3	2a
	2R5TPE470MC	2.5	105	470	2.5	105	10	117.5	12	3500	3	2a
	2R5TPE470M9	2.5	105	470	2.5	105	10	117.5	9	3900	3	2a
	2R5TPE470M7	2.5	105	470	2.5	105	10	117.5	7	4400	3	2a
	2R5TPE330M	2.5	105	330	2.5	105	10	82.5	25	2400	3	2a
	2R5TPE330MI	2.5	105	330	2.5	105	10	82.5	18	2800	3	2a
	2R5TPE330MF	2.5	105	330	2.5	105	10	82.5	15	3100	3	2a
	2R5TPE330MC	2.5	105	330	2.5	105	10	82.5	12	3500	3	2a
	2R5TPE330M9	2.5	105	330	2.5	105	10	82.5	9	3900	3	2a
	2R5TPE330M7	2.5	105	330	2.5	105	10	82.5	7	4400	3	2a
	2R5TPE220M	2.5	105	220	2.5	105	10	55.0	25	2400	3	2a
	2R5TPE220MI	2.5	105	220	2.5	105	10	55.0	18	2800	3	2a
D3L	2R5TPE220MF	2.5	105	220	2.5	105	10	55.0	15	3100	3	2a
	2R5TPE220M9	2.5	105	220	2.5	105	10	55.0	9	3900	3	2a
	10TPE220ML	10	105	220	10	105	10	220.0	25	2400	—	2a
	10TPE220MIL	10	105	220	10	105	10	220.0	18	2800	—	2a
	6TPE330MAL	6.3	85	330	5.0	105	10	207.9	25	2400	3	2a
	6TPE330MA9EL	6.3	85	330	5.0	105	10	207.9	9/500k	3900	3	2a
	6TPE330ML	6.3	105	330	6.3	105	10	207.9	25	2400	3	2a
	6TPE330MIL	6.3	105	330	6.3	105	10	207.9	18	2800	3	2a
	6TPE330MFL	6.3	105	330	6.3	105	10	207.9	15	3100	3	2a
	4TPE470MAL	4.0	105	470	4.0	105	10	188.0	10	4400	3	2a
	4TPE470ML	4.0	105	470	4.0	105	10	188.0	25	2400	3	2a
	4TPE470MIL	4.0	105	470	4.0	105	10	188.0	18	2800	3	2a
	4TPE470MFL	4.0	105	470	4.0	105	10	188.0	15	3100	3	2a
	4TPE470MCL	4.0	105	470	4.0	105	10	188.0	12	3500	3	2a
	2R5TPE680MFL	2.5	105	680	2.5	105	10	170.0	15	3100	3	2a
	2R5TPE680MCL	2.5	105	680	2.5	105	10	170.0	12	3500	3	2a
D4	10TPE330M	10	105	330	10	105	10	330.0	25	3000	—	2a
	6TPE680M	6.3	105	680	6.3	105	15	428.4	25	3000	3	2a
	6TPE680MI	6.3	105	680	6.3	105	15	428.4	18	3500	3	2a
	6TPE470M	6.3	105	470	6.3	105	15	296.1	25	3000	3	2a
	6TPE470MI	6.3	105	470	6.3	105	15	296.1	18	3500	3	2a
	6TPE330MAA	6.3	85	330	5.0	105	10	207.9	10	4400	3	2a
	2R5TPE1000MF	2.5	105	1000	2.5	105	15	250.0	15	3900	3	2a
	2R5TPE1500MF	2.5	105	1500	2.5	105	15	375.0	15	3900	—	2a
	2R5TPE1500MC	2.5	105	1500	2.5	105	15	375.0	12	4400	—	2a

※ Red letters : New models

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[6TPE150MF](#) [4TPE220MAZB](#) [6TPE100MAZB](#) [4TPE150MAZB](#) [2R5TPE330M](#) [6TPE470M](#) [6TPE330MFL](#)
[6TPE220MAP](#) [4TPE330MI](#) [10TPE220ML](#) [2R5TPE470MF](#) [4TPE470MIL](#) [2TPE470MAJGB](#) [2R5TPE220MAPB](#)
[2R5TPE220M](#) [6TPE150M](#) [6TPE330MAA](#) [2R5TPE470M7](#) [6TPE330MAP](#) [6TPE330MA9EL](#) [2R5TPE1500MC](#)
[4TPE150MAUB](#) [6TPE150MAZB](#) [6TPE120MAZB](#) [4TPE330M](#) [2R5TPE330M7](#) [6TPE330ML](#) [2R5TPE330MC](#)
[2R5TPE330MAZB](#) [2R5TPE330MI](#) [6TPE330MAL](#) [6TPE470MI](#) [2R5TPE220MAZB](#) [2R5TPE220M9](#) [6TPE100MPB](#)
[2R5TPE220MF](#) [4TPE220M](#) [6TPE100M](#) [2R5TPE220MZB](#) [2R5TPE1500MF](#) [10TPE68M](#) [6TPE330MIL](#)
[2TPE330MAFB](#) [4TPE470MCL](#) [2R5TPE330M9](#) [6TPE220MAZB](#) [4TPE470ML](#) [4TPE100MZB](#) [6TPE680MI](#)
[2R5TPE470MC](#) [2R5TPE220MI](#) [2R5TPE220MDGB](#) [4TPE220MI](#) [6TPE150MAPB](#) [2R5TPE680MCL](#) [6TPE470MAZU](#)
[6TPE150MI](#) [2R5TPE220MAFB](#) [2R5TPE330MF](#) [2R5TPE220MC](#) [4TPE220MF](#) [6TPE100MI](#) [4TPE150MI](#)
[2R5TPE470M9](#) [6TPE680M](#) [2R5TPE220MFGB](#) [10TPE220MIL](#) [10TPE47MAZB](#) [2TPE330MADGB](#) [2R5TPE470MI](#)
[2R5TPE220MLB](#) [2R5TPE220MIB](#) [4TPE470MFL](#) [2R5TPE680MFL](#) [2TPE330MFB](#) [8TPE100MAZB](#) [6TPE220M](#)
[6TPE220MI](#) [10TPE330M](#) [2R5TPE1000MF](#)