

50x50x10 mm(G)

SUNON



8.5~12.5 CFM



KDE Series (Magnetic Levitation System Motor)

Model	P/N	Bearing ● VAPO ○ BALL ⊙ 2BALL	Rating Voltage (VDC)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
KDE1205PFV1	MS.G	●	12	0.12	1.4	6500	12.5	0.19	35	25
KDE1205PFV2	MS.G	●	12	0.08	1.0	5500	10.6	0.15	30	25
KDE1205PFV3	MS.G	●	12	0.06	0.7	4500	8.5	0.1	25	25
KDE1205PFB1	MS.G	○	12	0.12	1.4	6500	12.5	0.19	36	25
KDE1205PFB2	MS.G	○	12	0.08	1.0	5500	10.6	0.15	31.5	25
KDE1205PFB3	MS.G	○	12	0.06	0.7	4500	8.5	0.1	26	25

*Remarks : GM series are available with lower power consumption, higher torque and higher T^o range (ïÜ70℃J).

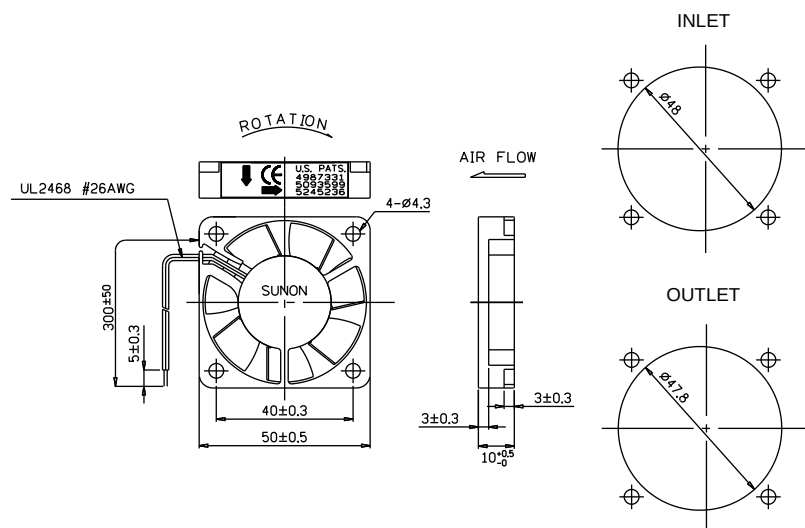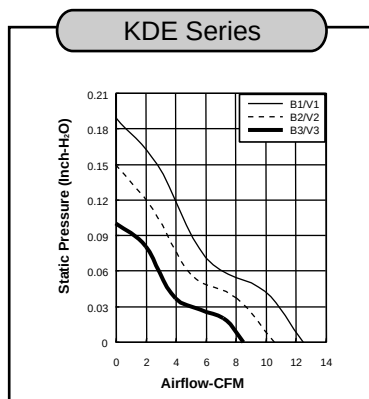

*Specifications subject to change without notice.

50x50x15 mm

SUNON


10.2~17 CFM



KDE Series (Magnetic Levitation System Motor)

Model	P/N	Bearing	Rating Voltage (VDC)	Power Current (AMP)	Power Consumption (WATTS)	Speed (RPM)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise (dBA)	Weight (g)
KDE1205PHV1	MS	● VAPO	12	0.13	1.5	5800	17	0.23	33	36
KDE1205PHV2	MS	● BALL	12	0.08	1.0	4700	13	0.17	29	36
KDE1205PHV3	MS	● 2BALL	12	0.06	0.7	3700	10.2	0.12	22	36
KDE1205PHB1	MS	○	12	0.13	1.5	5800	17	0.23	34	36
KDE1205PHB2	MS	○	12	0.08	1.0	4700	13	0.17	29.5	36
KDE1205PHB3	MS	○	12	0.06	0.7	3700	10.2	0.12	22.5	36

*Remarks : GM series are available with lower power consumption, higher torque and higher T[°] range (ïÜ70tJ).

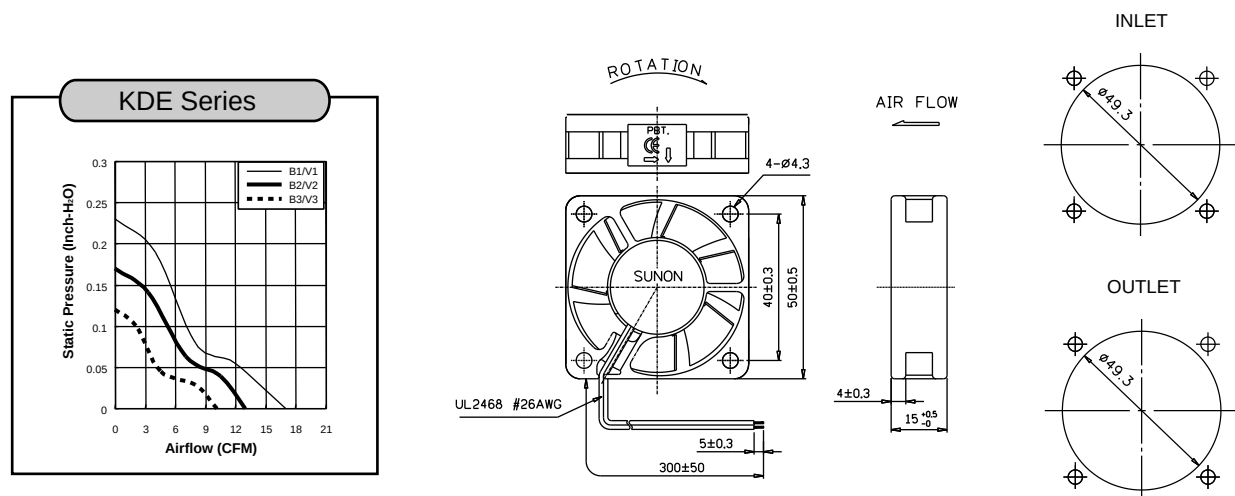

*Specifications subject to change without notice.