

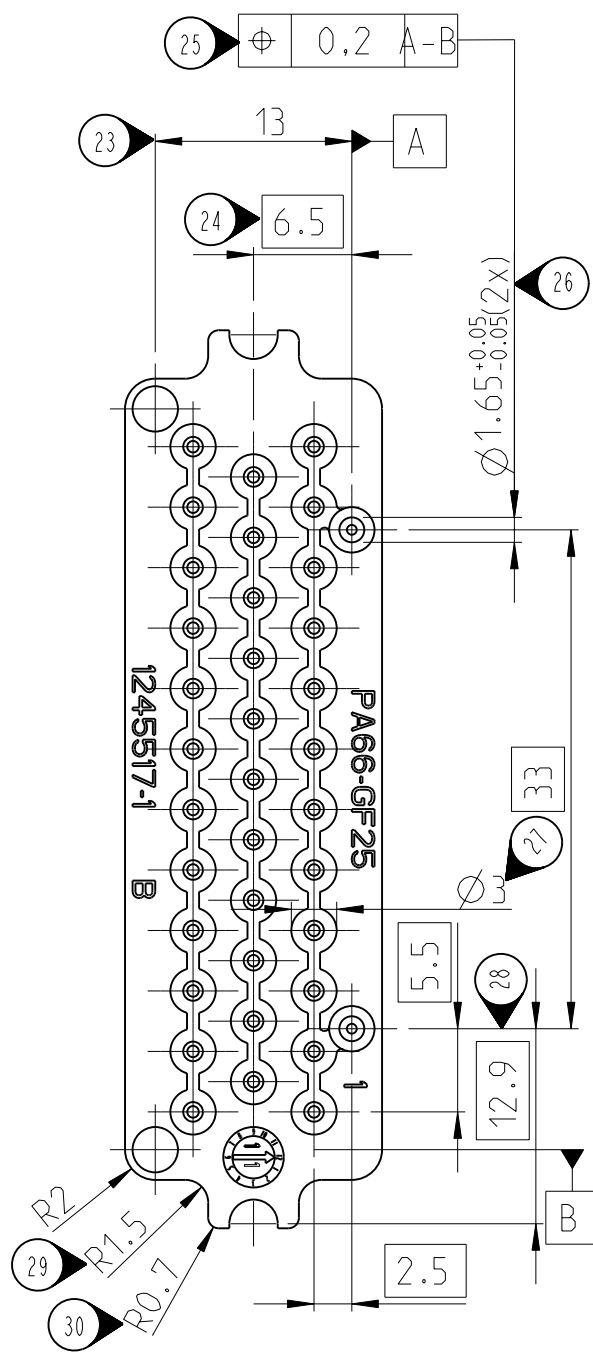





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
A1	-		A1	NEW DRAWING	10.02.11	SR	AR
			B1	ECR-11-011294	26MAY2011	SR	AR
			B2	ECR-11-011684	06JUN2011	VG	AR
			B3	ECR-11-012551	16JUN2011	VG	AR

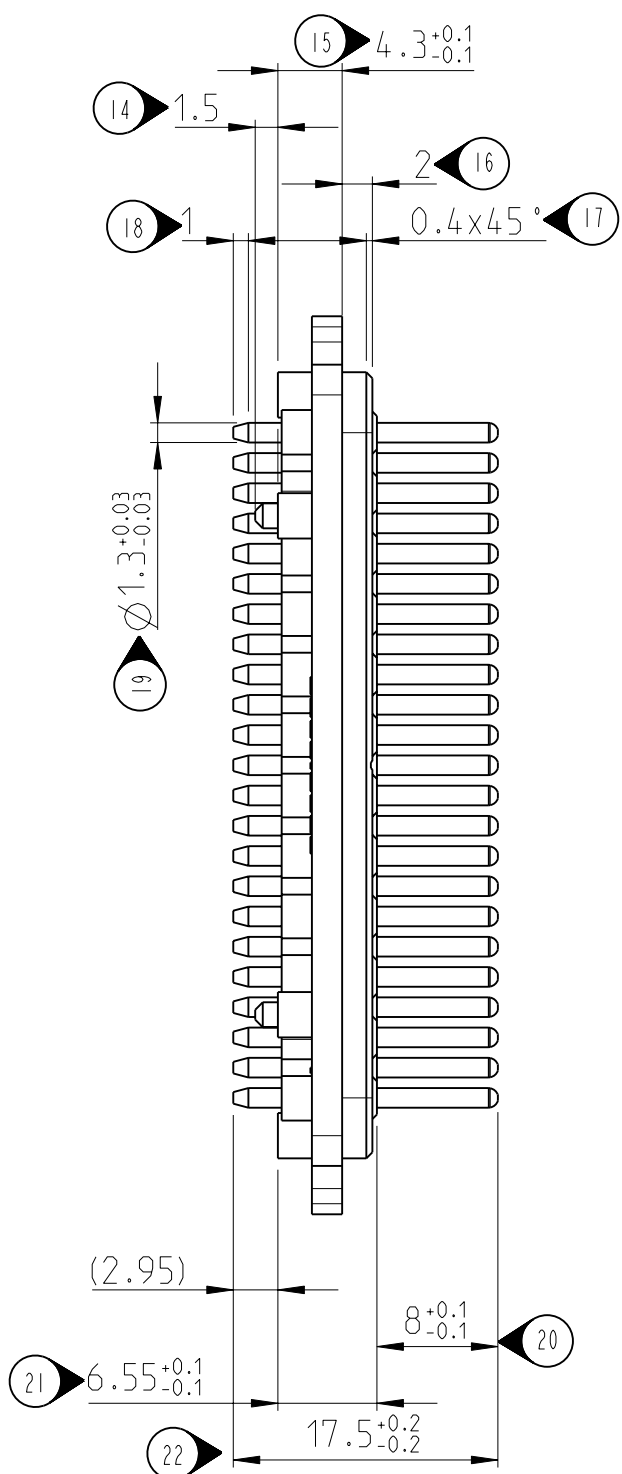

RECOMMENDED PC-BOARD LAYOUT EMPFOHLENES LEITERPLATTENLAYOUT

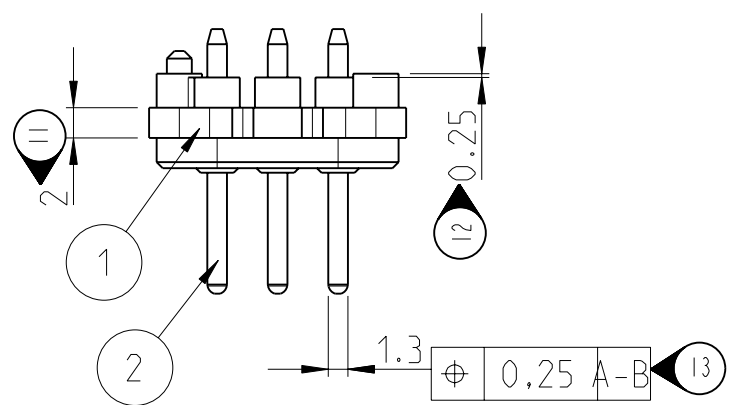

INSTALLATION HEIGHT OF PIN HEADER FOR SAFE CONTACTING WITH SOCKET CONNECTOR
EINBAUHÖHE DER STIFTELEISTE FUER SICHERE KONTAKTIERUNG MIT BUCHSENSTECKER

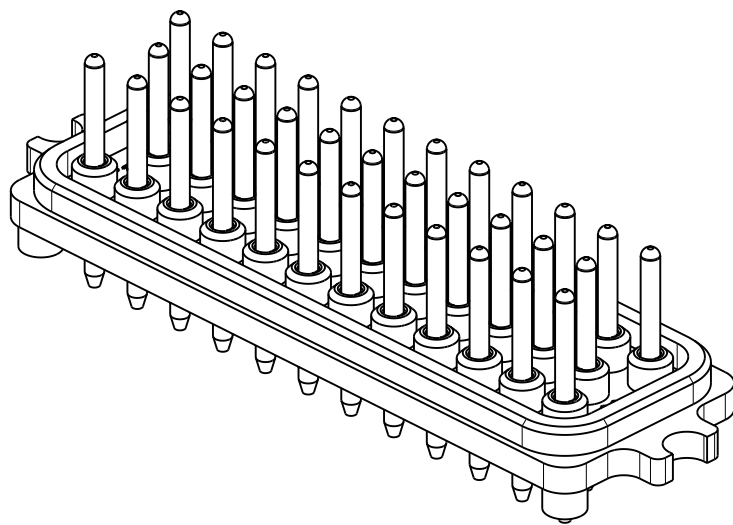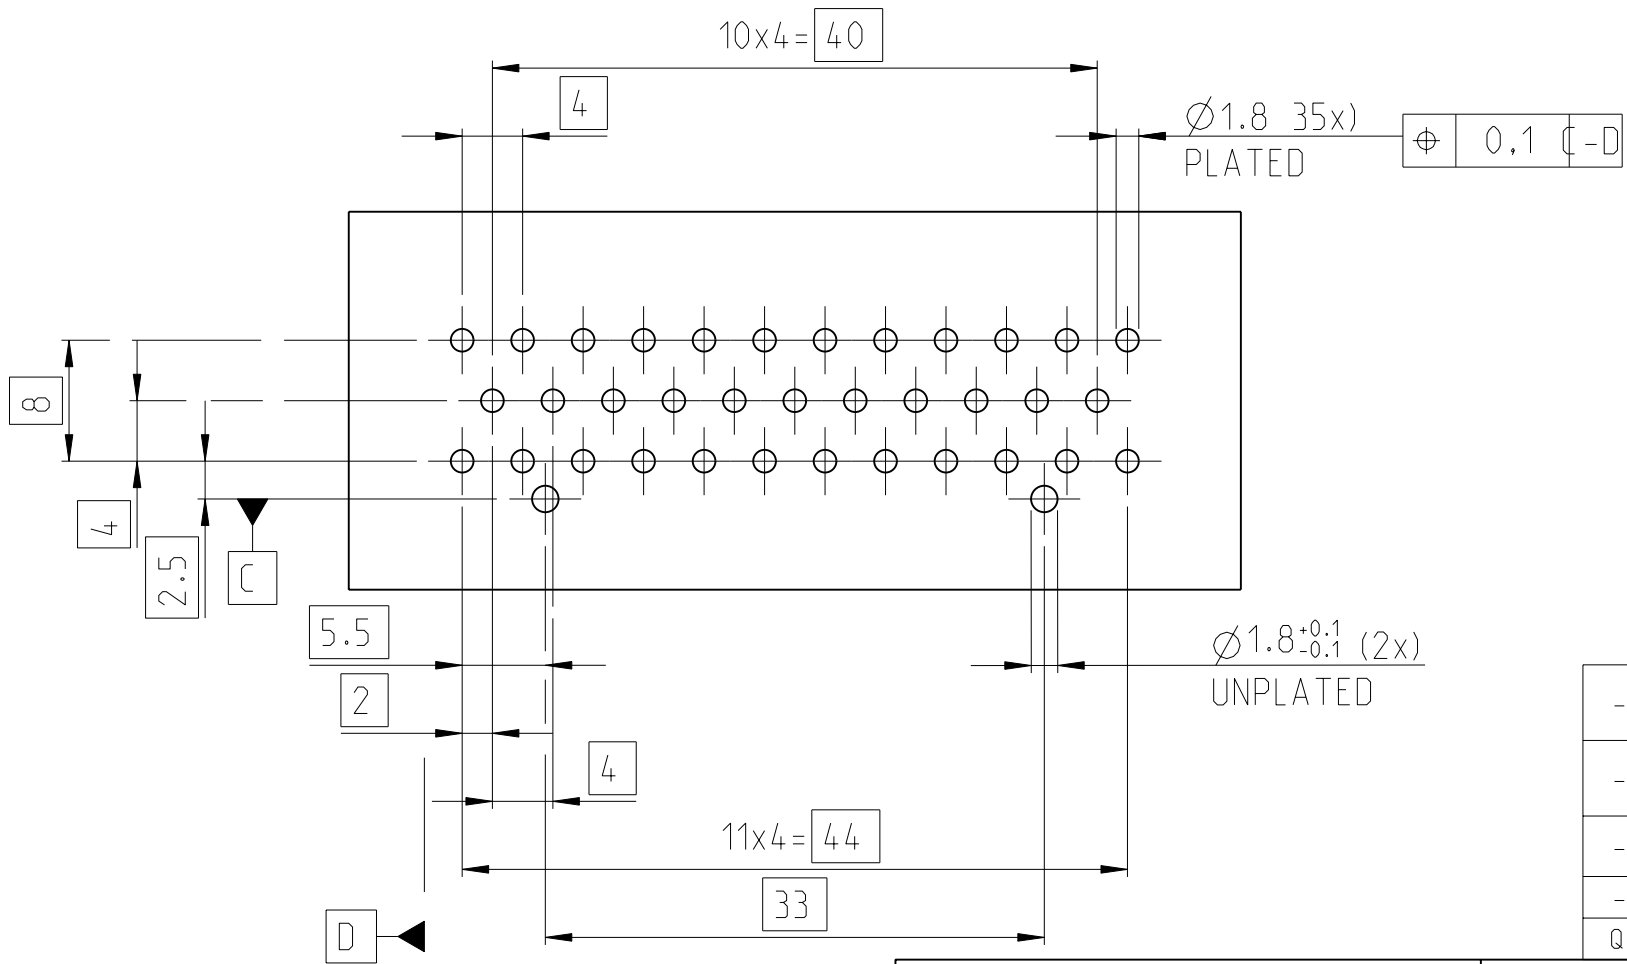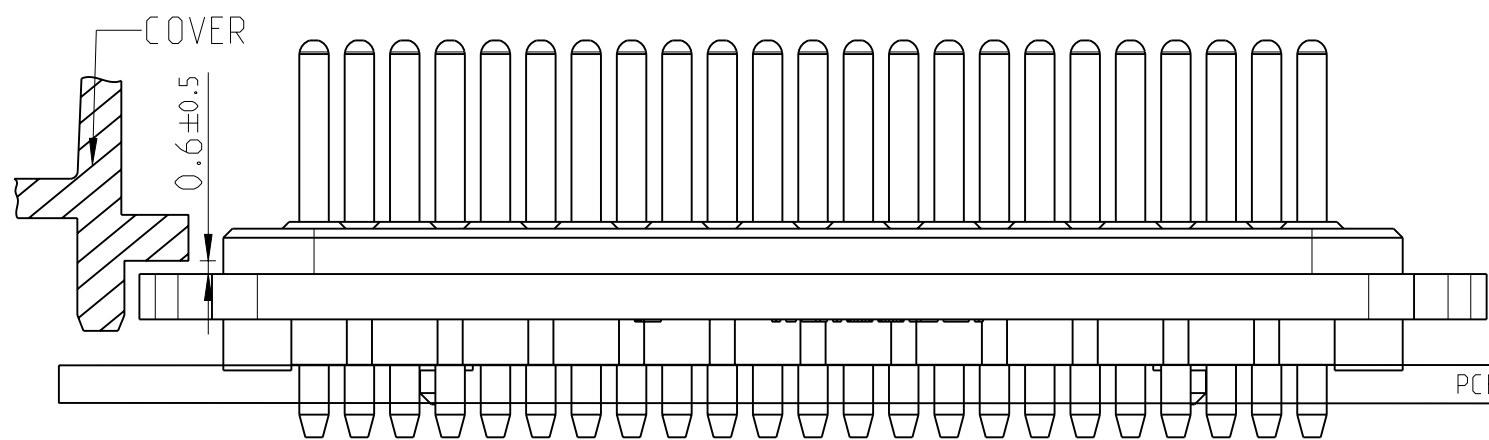

-	-	-	35	-	PIN STIFT	2
-	-	-	1	1	PIN HOUSING STIFTGEHAEUSE	1
-	-	-	-1	REV.	DESCRIPTION	ITEM NO
-	-	-	-	←	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG. REVISION)	
QTY REQD PER ASSY				PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN 290CT2010 R. SCHNEIDER		 TE Connectivity																
			CHK 290CT2010 A. ROESGEN																		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME AMP SEAL PIN HEADER 35 POS. -																
mm																					
		0 PLC ±0.1																			
		1 PLC ±0.1																			
		2 PLC ±0.1																			
		3 PLC ±0.1																			
		4 PLC ±0.1																			
		ANGLES ±1																			
MATERIAL		FINISH			PRODUCT SPEC 108-1329		APPLICATION SPEC 114-16016		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO						
-		-			WEIGHT -		A2		00779		C=1103599				-						
CUSTOMER DRAWING										SCALE		5:1		SHEET		1 OF 1		REV		B3	