



DATE	SYM	REVISION RECORD	AUTH.	DR.	CK.
3/5/97	-	ISSUED		NT	MM
9/28/01	A	OTHERWISE SPECIFIED TOLERANCE ±.005 WAS ±.010		NT	DG

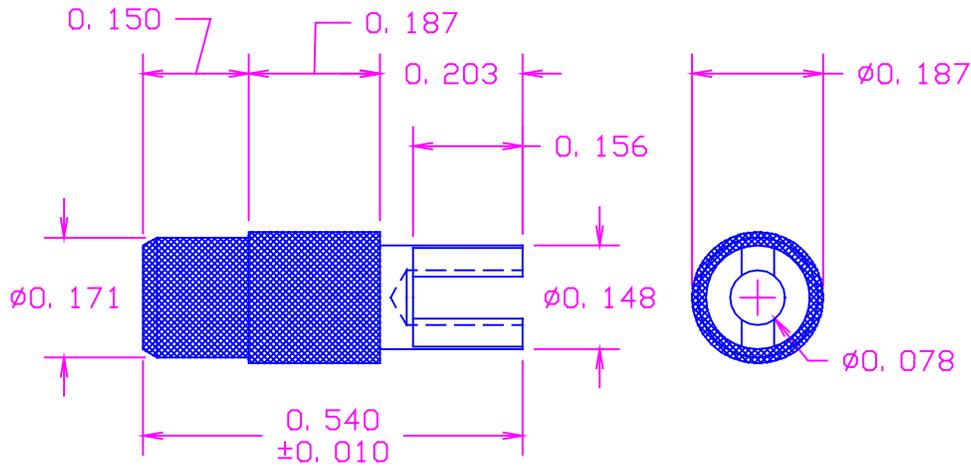

RECOMMENDED HOLE SIZE  
FOR PRESS FIT INSERTION

MATERIAL: PIN- BRASS PER ASTM B16,  
ALLOY C 36000, 1/2 HARD  
BUSHING- PTFE PER ASTM D1710  
COLOR(XX)- SEE COLOR CODE  
FINISH: PIN- .0003"MIN. SILVER PER QQ-S-365  
TYPE II, GRADE A WITH NON-CHROMATE  
PRESERVATIVE

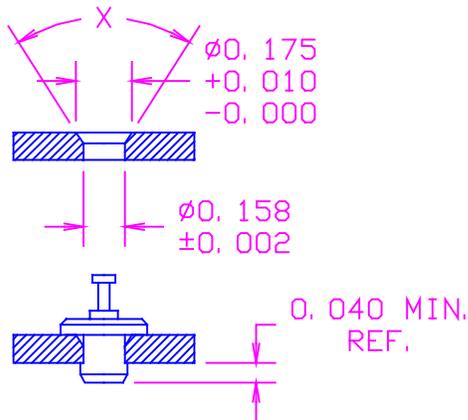

FOR BOARD THICKNESS GREATER THAN .040, X=60°  
FOR BOARD THICKNESS LESS THAN .040, X=80°

(XX)COLOR CODE:  
10-BLACK  
11-BROWN  
12-RED  
13-ORANGE  
14-YELLOW  
15-GREEN  
16-BLUE  
17-VIOLET  
18-GRAY  
19-WHITE(NATURAL)

ACTUAL SIZE



TOLERANCES (EXCEPT AS NOTED)	CONCORD ELECTRONICS CORPORATION		
DECIMAL ± .005	P/N	SCALE	30 GREAT JONES ST. NEW YORK N. Y. 10012
FRACTIONAL ± 1/64	TITLE PTFE INSULATED TERMINAL		
ANGULAR ± 5°	DATE 3-4-97	DRAWING NUMBER 1106-05-01XX	