
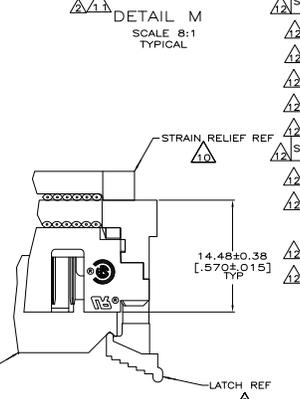
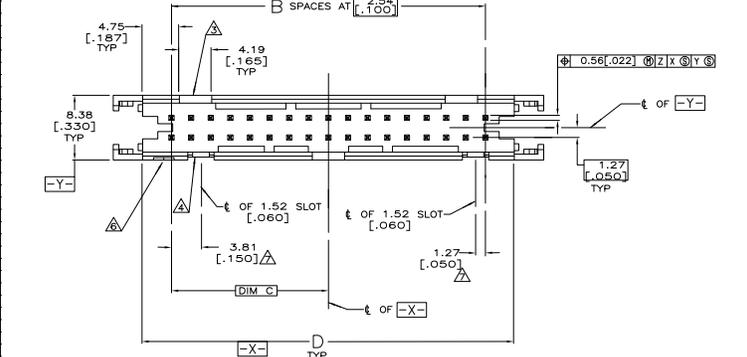
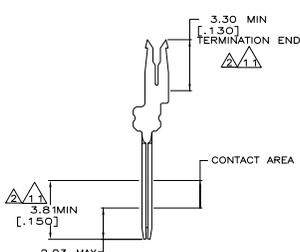
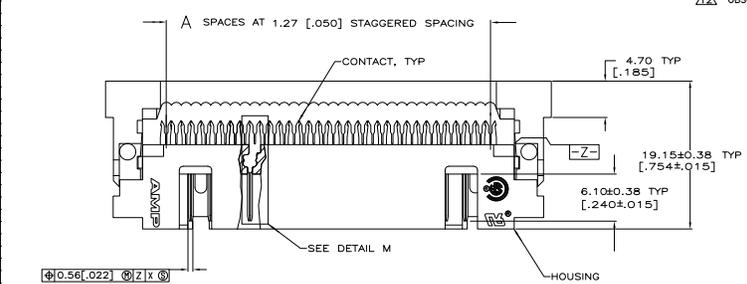


REV	DATE	DESCRIPTION	BY	CHK	APP
00					

- ▲ FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; BLACK.
- ▲ 2.54µm [.000100] MIN BRIGHT TIN-LEAD ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- ▲ NO SLOT ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
- ▲ NO SLOT FOR SNAP-IN POLARIZER ON THIS END FOR 10 AND 14 POSITION HOUSINGS.
- 5. FOR MILITARY POLARIZATION, ORDER SNAP-IN POLARIZER 499991-2 (BULK PACK OF 50).
- ▲ POSITION NO 1 INDICATOR.
- ▲ COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- ▲ FOR LATCHES ORDER 111451, 2 PER ASSEMBLY.
- ▲ PHOSPHOR BRONZE PER QQ-B-750.
- ▲ STRAIN RELIEF 111547 MUST BE ORDERED SEPARATELY.
- ▲ 2.54µm [.000100] MIN TIN ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

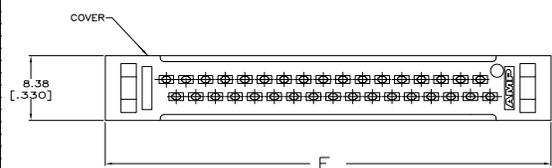

REV	DATE	DESCRIPTION	BY	CHK	APP			
1		95.81 [3.772]	86.21 [3.394]	39.37 [1.550]	31	63	64	2-111446-6
1		89.59 [3.527]	81.13 [3.194]	36.83 [1.450]	29	59	60	2-111446-5
1		70.41 [2.772]	60.81 [2.394]	26.67 [1.050]	21	43	44	2-111446-4
1		65.35 [2.572]	55.73 [2.194]	24.13 [0.950]	19	39	40	2-111446-3
1		57.71 [2.272]	48.11 [1.894]	20.32 [0.800]	16	33	34	2-111446-2
1		52.63 [2.072]	43.03 [1.694]	17.78 [0.700]	14	29	30	2-111446-1
1		47.55 [1.872]	37.95 [1.494]	15.24 [0.600]	12	25	26	2-111446-0
1		39.93 [1.572]	30.33 [1.194]	11.43 [0.450]	11	23	24	1-111446-9
1		34.85 [1.372]	25.25 [0.994]	8.89 [0.350]	9	19	20	1-111446-8
1		32.31 [1.272]	22.71 [0.894]	7.62 [0.300]	7	15	16	1-111446-7
1		27.230 [1.072]	17.63 [0.694]	5.08 [0.200]	6	13	14	1-111446-6
1		22.150 [0.872]	12.55 [0.494]	2.54 [0.100]	4	9	10	1-111446-5
1		19.61 [0.772]	10.01 [0.394]	0.00 [0.000]	31	63	64	1-111446-3
1		17.07 [0.672]	7.47 [0.294]	-0.00 [-0.000]	29	59	60	1-111446-2
1		14.53 [0.572]	4.93 [0.194]	-0.00 [-0.000]	24	49	50	1-111446-1
1		11.99 [0.472]	2.39 [0.094]	-0.00 [-0.000]	21	43	44	1-111446-0
1		9.45 [0.372]	-0.15 [-0.006]	-0.00 [-0.000]	19	39	40	111446-9
1		6.91 [0.272]	-0.61 [-0.024]	-0.00 [-0.000]	16	33	34	111446-8
1		4.37 [0.172]	-1.07 [-0.042]	-0.00 [-0.000]	14	29	30	111446-7
1		1.83 [0.072]	-1.53 [-0.060]	-0.00 [-0.000]	12	25	26	111446-6
1		-0.71 [-0.028]	-2.00 [-0.079]	-0.00 [-0.000]	11	23	24	111446-5
1		-3.17 [-0.125]	-2.46 [-0.097]	-0.00 [-0.000]	9	19	20	111446-4
1		-5.63 [-0.221]	-2.92 [-0.115]	-0.00 [-0.000]	7	15	16	111446-3
1		-8.09 [-0.318]	-3.38 [-0.133]	-0.00 [-0.000]	6	13	14	111446-2
1		-10.55 [-0.415]	-3.84 [-0.151]	-0.00 [-0.000]	4	9	10	111446-1

CONTACT FINISH	E	D	C	B	A	NO OF POSN	PART NUMBER