

905/906 Series

[illegible][illegible]

- Available for 50/125, 62.5/125, 100/140, 200/230um fibers and custom drill hole sizes
- Maximum buffer diameter : 2.46mm
- Crimp ferrule inner diameter: 4.42mm
- Typical insertion loss ranging from: <0.8dB to <2.0dB (dependant on the fiber size)
- Full range of adapters available supplied with half length and full length alignment sleeves to accommodate both 905 and 906 type connectors

Features

The SMA and SMARt connector is widely spread in industrial and medical networks requirements. The Amphenol Socapex SMA and SMARt is intermateable with the NFC93-813



905 Series SMARt Ceramic connector



906 Series SMARt Ceramic connector

[illegible]

Amphenol
Socapex  **Fibre Optic Business Division**

Amphenol Socapex Promenade de l'Arve - B.P.29 - 74311 THYEZ - FRANCE - Tel. : 33 (0) 4 50 89 28 53 - Fax : 33 (0) 4 50 89 28 23

Specifications are subject to change without notice. All statements, information and data system given herein are believed to be accurate and reliable but are presented without warranty. No reproduction without agreement. E580/A . Printed in France by Amphenol Socapex.

SMA and SMARt Multimode Connectors



905/906-150 Series
Stainless Steel SMA Connectors



906-122 Series
Stainless Steel SMA Connectors


Part Number	Use With Fiber Sizes (μm)	Max Buffer Diameter (mm)	Crimp ferule Inner Diameter (mm)	Typical insertion Loss (db)	Crimp cavity	Ferrule inner Diameter (μm)
905-150-5001	50/125 62,5/125	2,46	4,42	<2,0	A	128 + 10/-0
905-150-5002	100/140	2,46	4,42	<2,0	A	144 + 10/-0
905-150-5003	200/230	2,46	4,42	<2,0	A	231 + 10/-0
905-150-5004	400/430	2,46	4,42	<2,0	A	436 + 10/-0
905-150-5005	600/630	2,46	4,42	<2,0	A	641 + 10/-0
906-122-5000	100/140	2,46	2,92 + 4,44 4,42	<0,8	A + C	144 + 10/-0
906-122-5004	100/140	2,46	2,92 + 4,44 4,42	<1,0	A + C	128 + 10/-0

Adapters	Part Number	Description
	905-120-5000	905/906 Adapter - bulkhead feedthru, d-hole mount, jack-jack, nut and washer
	905-120-5003	905/906 Adapter - in-line, jack jack, 2 nuts and 2 washers
	905-120-5004	905/906 Half Length Adapter - nut and washer
	905-120-5008	905/906 Adapter - Environmentally-sealed, bulkhead feedthru, d-hole mount, jack jack, nut and washer
	905-120-5016	905/906 SMARt Adapter - bulkhead feedthru, d-hole mount, jack jack, nut and washer


SMA and SMARt Multimode Connectors

Line Drawings (dimensions in inch and mm)

905 SMARt Connector

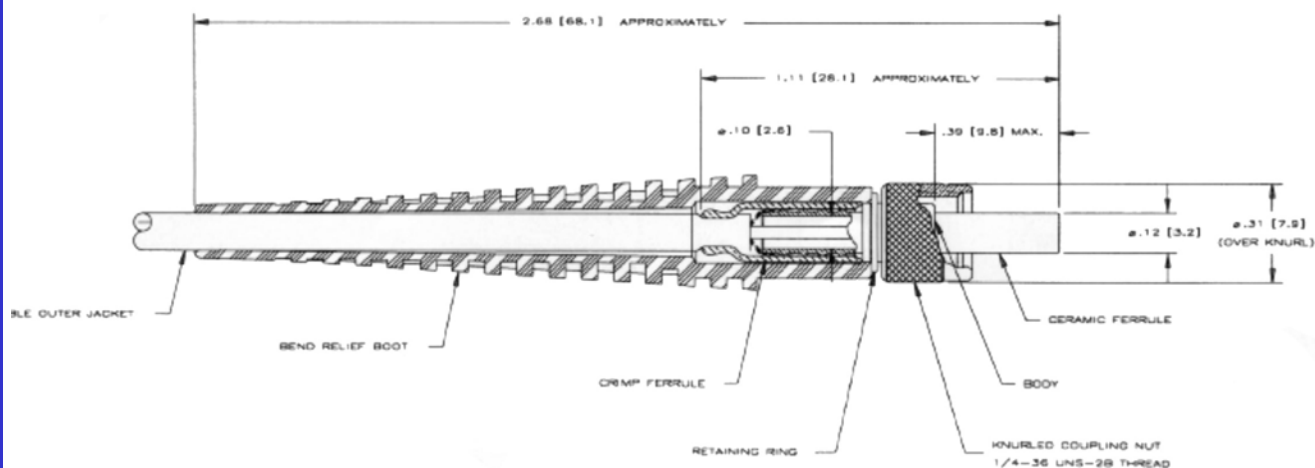

906 SMARt Connector

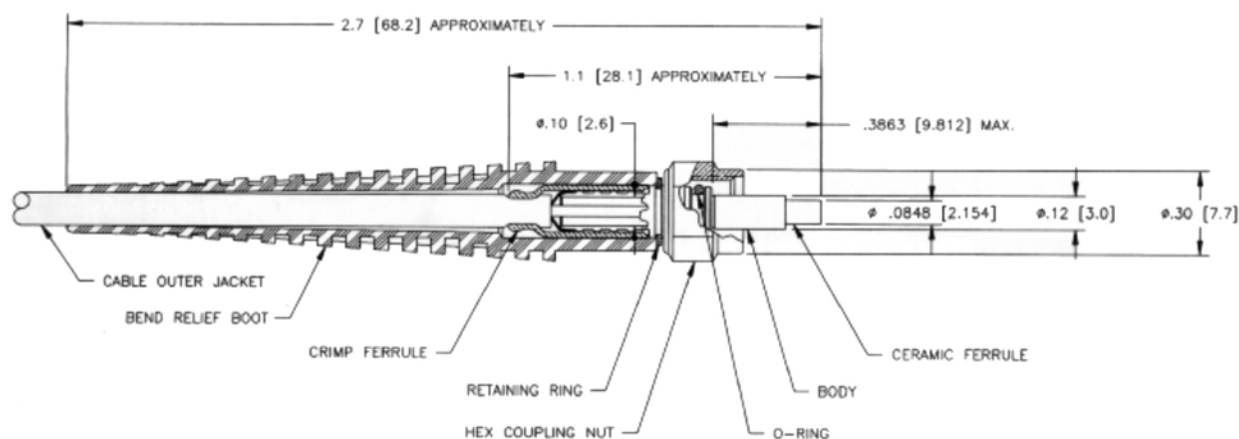

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[905-120-5000](#) [905-163](#) [905-138-5002](#) [905-150-5004](#) [906-122-5000](#) [906-122-5004](#)