
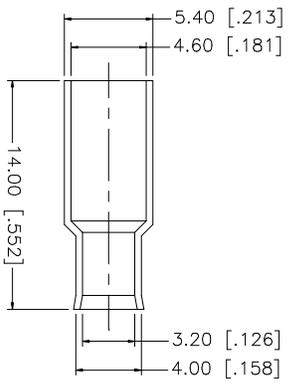



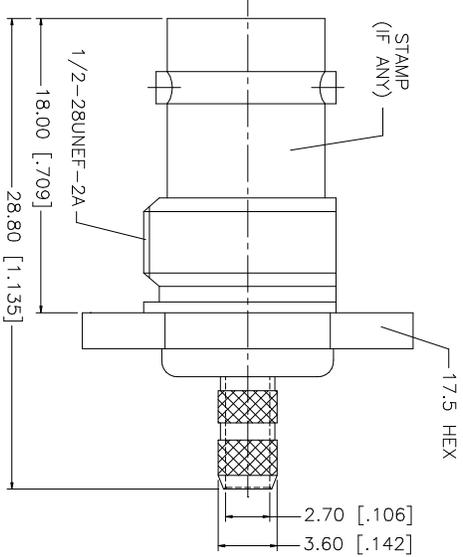
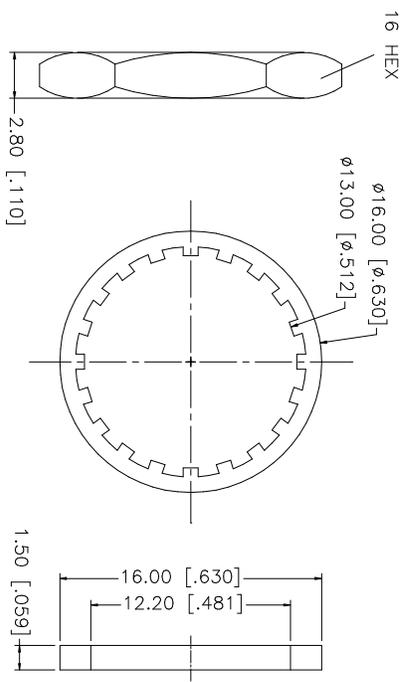


REV.	DATE	DESCRIPTION
A	01/10/04	UPDATE DRAWING FORMAT

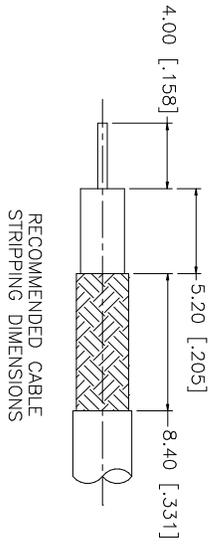

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .187"
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"
 3. MAX. PANEL THICKNESS = 3.5mm

DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	APPROVALS	DATE	PART DESCRIPTION
8 FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	C:/112/112517.DWG	G.R.S.	01/10/04	BNC BULKHEAD CRIMP JACK FOR 316 DOUBLE BRAID
7 SLEEVE	DELRIIN	NATURAL	1					
6 HEX NUT	BRASS	NICKEL	1					
5 LOCK WASHER	BRASS	NICKEL	1					
4 GASKET	RUBBER	RED	1					
3 CONTACT PIN	PHOS. BRONZE	GOLD	1					
2 INSULATOR	DELRIIN	NATURAL	1					
1 BODY	BRASS	NICKEL	1					
DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	APPROVALS	DATE	PART DESCRIPTION
					C:/112/112517.DWG			BNC BULKHEAD CRIMP JACK FOR 316 DOUBLE BRAID
								112517

Amphenol Connex

BNC BULKHEAD CRIMP JACK FOR 316 DOUBLE BRAID