
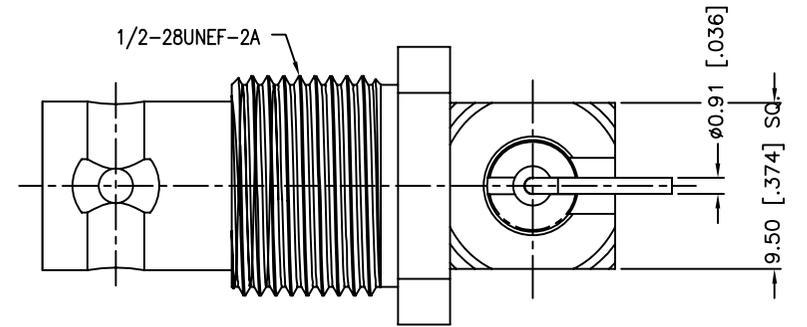
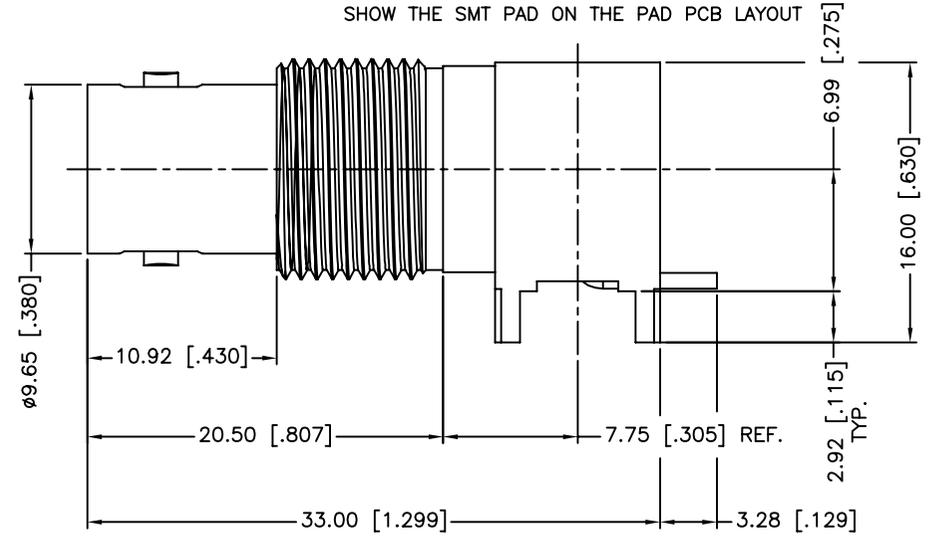


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/22/10	XXXXXX	INITIAL RELEASE
E	04/15/10	2040	CHANG BACK BODY PLATED FROM MATTE TIN TO NICKEL
F	04/26/10	2042	

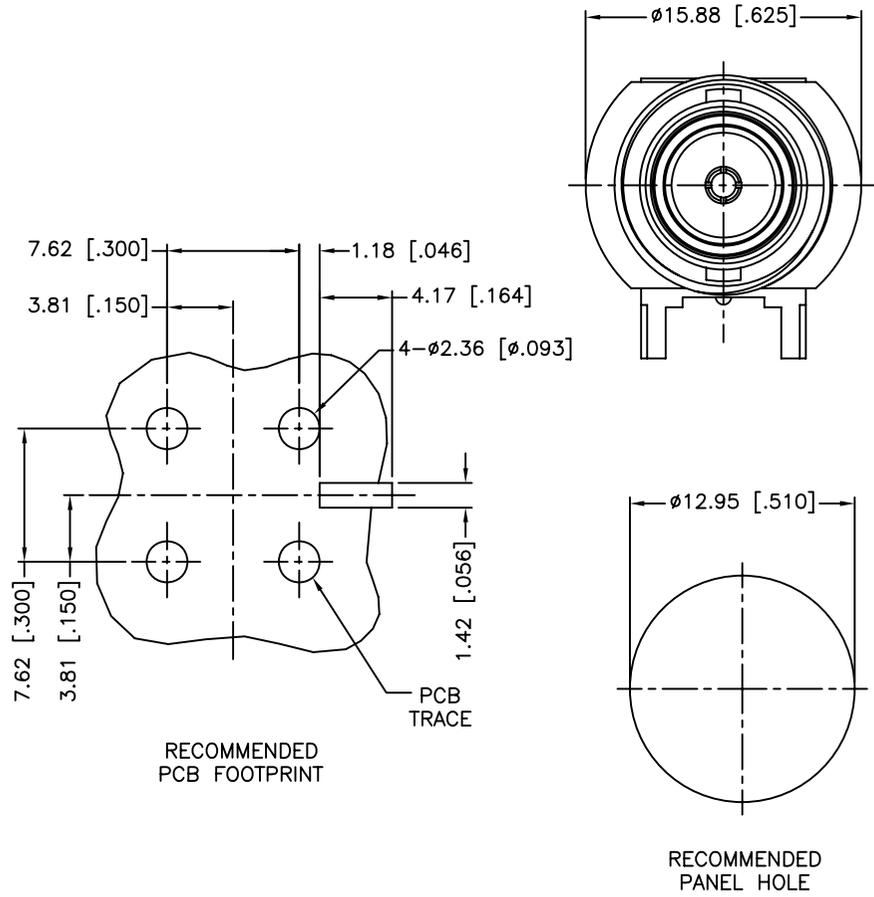

- FREQUENCY RANGE: DC - 1 GHz
 - VSWR(RETURN LOSS): 1.12 (25dB), MAX DC - 1.5GHz
1.22 (20dB), MAX 1.5 - 3 GHz
- VSWR PERFORMANCE DEPENDANT UPON PCB LAUNCH CONFIGURATION

DESCRIPTION	MATERIAL	FINISH	QTY	
7	INSULATOR DISC	PTFE	NATURAL	1
6	BODY-CUBE	BRASS	NICKEL	1
5	CONTACT-REAR	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	LOCK RING	BRASS	NICKEL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	04/26/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/112800.DWG	

Amphenol Connex

PART DESCRIPTION
**BNC R/A PCB JACK THRU LEG,
SMT CONTACT BULKHEAD - 75 OHM**

PART NO.
112800

DWG. NO. 112800.DWG REV. F SIZE A SCALE NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[112800](#)