

Interactive Catalog Supplements Catalog PDFs

If you need detailed product information, or help choosing the right product for your application, see our **Interactive Catalog**. Use the **Interactive Catalog** to access the most complete and up-to-date information available.

The **Interactive Catalog** provides an extensive collection of product specifications, application data, and technical literature that can be searched based on criteria you select.

This PDF catalog information was published in November 2000.



Sensing and Control
**Interactive
Catalog...**

**Click this icon to try
the Interactive Catalog.**

Sensing and Control

Honeywell Inc.

11 West Spring Street

Freeport, IL 61032

www.honeywell.com/sensing

Manual Switches

Advanced Manual Line

Solid state switches — AML10 series

AML11/12 pushbutton switches 12/13

Electronic control switches — AML20 series

AML21/22 pushbutton switches 14/15
AML23/25 paddle switches 16/17
AML24/26 rocker switches 18/19
AML27 keylock switches 20

Power duty switches — AML30 series

AML31/32 pushbutton switches 21
AML33/35 paddle switches 22
AML34/36 rocker switches. 23

Indicators, Annunciators — AML40 series

AML41/42 indicators 24
AML45 annunciators. 25

Buttons, rockers, covers, cap assemblies — AML50 series

AML59 annunciator cap assemblies 28
AML51/52 pushbutton switch and indicator buttons 30/31
AML53/55 paddle switch covers 35/36
AML54/56 rocker switch operators 30/40

Mounting hardware — AML60 series

AML61 mounting bracket assembly 43

Accessories — AML70 series

AML71 barriers and AML75 panel seals 44
AML76 switch guards and AML78 panel plugs, dummy housing 45
AML79 connector block 45

Lamps and LEDs — AML90 series


AML91 incandescent wedge base T-1¾ lamps and AML92 T-1¾ LEDs. 46

Mounting dimensions. 47

Manual Switches

Advanced Manual Line

AML Series

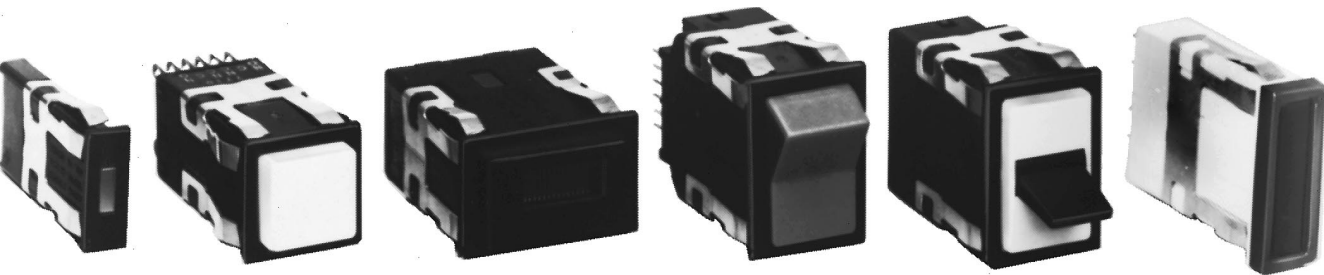

IN FRONT OF THE PANEL

Coordinated, attractive appearance. AML features innovations designed by industrial designers to achieve the best balance of human factors and aesthetic appearance. Operator height, bezel size, and the compatibility of square and rectangular shapes blend with other components to harmonize your panel. There's no visual clutter to distract from man/machine communication.

This comprehensive line of lighted and unlighted manual controls features:

- Pushbuttons for high and intermediate frequency functions;
- Rocker and paddle switches, with 2 or 3 positions, for less frequent control functions;
- Plus lighted indicators and annunciators which complement AML's universal appeal.

Various controls can be matched with their functions to accommodate the most natural and efficient habit pattern reflex. Keylock operated switches can be used to assure "authorized personnel only" access.

Display flexibility. AML offers a choice of five legend sizes, four button heights, full or split section display, and illumination by incandescent lamps, LED's or neons. Colors are bright and uniform, providing a strong definition and good visibility. (Non-illuminated devices have the same attractive colors.)

Color display options include:

- Transmitted color — color can be distinguished whether lamp is On or Off.
- Dead front — display appears black, until illumination causes legend and color to appear.
- Projected color — white display is diffused with color when illuminated.

BEHIND THE PANEL

AML's simple, cost effective design provides many behind-panel benefits for the designer and installer/user.

Simple to install. They snap in from the panel front individually or in vertical or horizontal strips; or in subpanel mounted strips and matrices that can be pre-assembled and pre-wired to assure accurate alignment and efficient panel building.

Electrical flexibility. Solid state switches with Hall effect integrated circuits interface directly with microprocessors and other logic level devices. These IC's were first applied in MICRO SWITCH solid state keyboards. Today, many MICRO SWITCH products incorporate the Hall effect technology to meet a wide range of position sensing and manual control needs.

Electronic control switches with gold or silver contacts, and 1, 2, or 4 poles, will handle up to 3 amps. Including an encoded version which generates different binary coded outputs merely by changing cam-keyed buttons.

Power duty switches meet line disconnect application needs with 10-amp push-buttons and 15-amp paddle and rocker switches.

Easy to wire. All AML devices present single level termination. This means faster, easier, neater, and more economical wiring. And there is a choice of solder, quick-connect, push-on, and printed circuit termination.



MATING RECEPTACLES

The .110 x .020 quick-connect/solder terminal (types 2 and 8) is designed for use with receptacles that comply with the UL standard for insertion and withdrawal forces. Maximum insertion force is 12 lbs. max., withdrawal force is 14 lbs. These receptacles are supplied by: AMP Inc., Berg, Augat, Hollingsworth, MALCO, Zierick, and others. Refer to Thomas Register or the Yellow Pages for the location of your local supplier.

Manuals

Manual Switches

Advanced Manual Line


AML Series

FEATURES

- Complete selection of pushbutton, rocker and paddle (toggle type) switches accommodates different functions and promotes operator efficiency.
- Solid state, electronic, and power duty control.
- Full or split screen incandescent display switches and indicators provide vivid transmitted color, projected color (for neutral display when unlit), and dead front (hidden color).
- Wide-angle visibility LED and line voltage neon display switches and indicators.
- Annunciators back-lighted by LED's enable high density message display.
- Keylock switches available for controlled access applications.
- All AML terminations at the same shallow depth (1.7 in. /43,1 mm) for convenient wiring or PC board termination.
- Snap-in surface mount or sub-panel (hidden bezel) mount with mounting hardware.
- Pad printed legends with a clear polyurethane overcoat available in a choice of five standard sizes.
- Metric design for worldwide acceptance.
- UL recognized, CSA certification.
- Selected listings are certified by VDE and CE. (For compliance status, contact the 800 number.)

MICRO SWITCH AML Advanced Manual Line combines functional flexibility with electrical versatility to provide a broad range of options to choose from.

EASY TO RELAMP

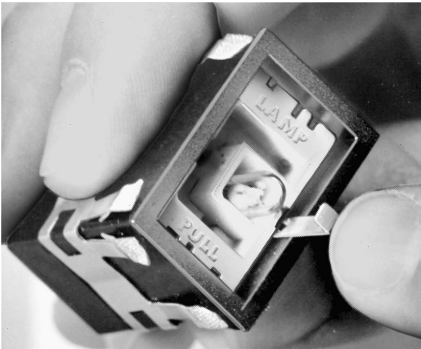

Relamping of T-1-3/4 incandescent AML91 lamps is accomplished from the front of the panel without tools. (AML92 T-1-3/4 LEDs can be added in the same manner.)

FULL GUARD BEZEL OPTION



As an alternative to standard height bezels (.06 in./1,5 mm), pushbutton switches can be furnished with full guard bezels extending .19 in./5.0 mm from the mounting surface. In the free position, standard buttons are flush with full guard bezels.

The raised bezel guards against accidental operation by someone leaning against or dropping something on a control console.

High Intensity LEDs For Full-face AML Lighted Display AML92 Series



- Full-face illumination for high visibility lighted colors.
- Advanced illumination technology combines high-intensity LED in standard T-1-3/4 wedge base lamp package.
- Easy plug-in installation in AML lighted switches and indicators.
- Low operating temperature permits high density, continuous operation with minimal heat build-up.

AML92 Series LEDs have a quad chip assembled in a T-1-3/4 wedge base lamp package. They provide full-face illumination when used with lighted pushbutton, rocker and paddle switches, or indicators equipped with incandescent lamp sockets. For ordering information, **refer to page 46.**

AML CHARACTERISTICS

	AML 10 Series	AML 20 Series	AML 30 Series	AML 40 Series
Electrical/Mechanical Life* Pushbuttons–Momentary	1,000,000	25,000 (silver)/ 100,000 (gold)	25,000	N/A ---
Pushbuttons–Alternate	25,000	25,000	25,000	---
Rockers	25,000	25,000	25,000	---
Paddles	25,000	25,000	25,000	---
Agency Ratings (May not apply to every series division) UL CSA VDE CE	File E53576 File LR4442 None	File E12252 File LR4442 File 0630/10.78+ Rating 1710 No. 4275.5788	File E12252 File LR4442 File 0630/10.78+ + Rating 1710 No. 4275.5788	File E58932 File LR4442 None

*95% Survival
+ Exception: Four-Pole AML's are not included in VDE Approval
++ Exception: Only the 2-pole AML33 and AML34 are certified by VDE

AML ELECTRICAL DATA

● AML10 Series

Electrical Characteristics						Absolute Maximum Rating ④			
Integrated Circuit Function	Supply Current (Max.)	Output Voltage (Operated)	Output Leakage Current max. (Released)	Switching Time Max.		Supply Voltage (V _s)	Voltage Externally Applied to Output	Loads to Output	Storage Temperature
				Rise 10% to 90%	Fall 90% to 10%				
4.5-24 VDC Sinking	5 V 7.0 mA (Released) 24 V 9.0 mA (Released) 14.0 mA (Operated- no load)	+ .4 Volt (Sinking 10 mA)	10 µA	1.5 µ sec (Sinking 10 mA)	0.5 µ sec (Sinking 10 mA)	–30 to +30 VDC	–0.5 Volt min. +24 Volts max. (Off condition)	20 mA (Sinking)	–40 –C to +65°C (–40° to +149°F)

① Over temperature range of 0° to +55°C (+32° to +131°F) and supply voltage of 4.5 to 5.5 VDC.
② Over temperature range of 0° to +55°C (+32° to +131°F) and supply voltage of 16 VDC.
③ At 24°C. (+75°F)
④ As with all solid state components, performance can be expected to deteriorate as rating limits are approached; however, they will not be damaged unless the limits are exceeded.

● AML20 Series

Contacts	Voltage	Current	Load Type
Silver or Gold-plated Silver	250 VAC 125 VAC 24 VDC	2 Amps 3 Amps 2 Amps	75% Power Factor 75% Power Factor Resistive
Gold	125 VAC/DC	100 mA	Resistive

● AML30 Series


Voltage	Current		Load Type
	Pushbuttons	Rockers or Paddles	
125 VAC	10 amps	15 amps	60% power factor
250 VAC	10 amps	15 amps	60% power factor

Manual Switches

Solid State Pushbutton

AML11 Series

INCANDESCENT OR NON-LIGHTED DISPLAY

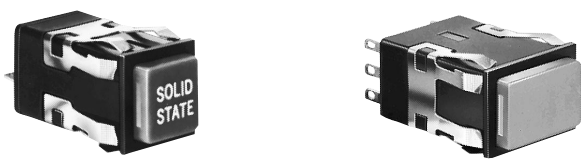

Buttons ordered separately.

Electrical Data	page 11
Buttons	page 30
Lamps and LEDs	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/48

- FEATURES**
- Hall effect reliability.
 - Provides low voltage signals that interface with nearly all DC logic level loads.
 - 4.5-24 VDC supply voltage.
 - Full guard bezel option.
 - Lamps can be furnished installed or ordered separately.
 - UL recognized.
 - Lamp circuit independent of switch circuit.


AML11 ORDER GUIDE

AML11 B		B	A	2	EA		
Housing Type		Bezel Color	Incandescent Lamp Type	Terminal Type	Circuitry Codes		
Standard Bezel: AML11B Square Non-Lighted AML11C Square 1 Lamp Ckt. AML11E Rect. Non-Lighted AML11F Rect. 1 Lamp Ckt. AML11G Rect. 2 Lamp Ckts.		B Black	A No Lamp Installed	2 .110 × .020 (Solder or Quick-Connect)	4.5-24 VDC Sinking	EA Momentary Action	EE Alternate Action
Full Guard Bezel: AML11H Square Non-Lighted AML11J Square 1 Lamp Ckt. AML11K Rect. Non-Lighted AML11L Rect. 1 Lamp Ckt. AML11M Rect. 2 Lamp Ckts.			B 6 V Lamp* C 14 V Lamp* E 28 V Lamp*				

* Lamps will be installed per each lamp circuit specified in the Housing Type.

Example: **AML11BBA2EA**
Square pushbutton switch housing, non-lighted; black bezel; .110 × .020 termination; momentary action; current sinking output for use with 4.5 volt supply.

CURRENT SINKING OUTPUT AML10 SERIES

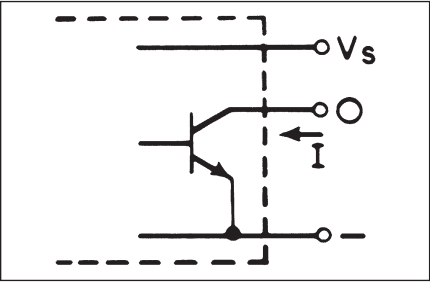

A permanent magnet plunger moves adjacent to the Hall effect integrated circuit to give a digital, current sinking normally high output.

Manual Switches

Solid State Pushbutton

AML12 Series

LED DISPLAY



LED "window" buttons ordered separately.
LEDs are not replaceable.

FEATURES

- Hall effect reliability (Refer to facing page for electrical specifications.)
- Rectangular, high efficiency LED's give flush display area and wide angle indication.
- Available with or without diode protection for the LED's.
- 4.5 thru 24 VDC devices have an internal resistor to maintain LED current at nominal 20 mA.

Electrical Data	page 11
Buttons	pages 30/31
Lamps and LEDs	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/48

- LED circuit independent of switch circuit.
- UL recognized.

AML12 ORDER GUIDE

AML12C		B	LED Color/ Voltage		2	EA		
Housing Type		Bezel Color			Terminal Type/ Diode Protection	Circuitry Codes		
Standard Bezel: AML12C Square 1 LED		B Black	Red		2 .110 × .020 (Solder or Quick-Connect)	4.5-24 VDC Sinking	EA Momentary Action	EE Alternate Action
Full Guard Bezel: AML12J Square 1 LED			Yellow					
Example: AML12CBB2EA			B	V*	3 .025 × .025 (Printed Circuit or Push-On)			
Square pushbutton switch housing; black bezel; red LED; .110 × .020 termina- tion; current sinking output for use with 4.5 volt supply; momentary action.		C	5 V					
		D	10 V	L	8 .110 × .020 With Diode Protection			
		E	15 V	M				
		F	24 V	Green				
		H	V*	R				
		J	5 V	S				
		K	10 V	T				
		L	15 V	W				
		M	24 V	X				

* See LED application information for devices without current-limiting resistor, page 46.

* See LED application information for devices without current-limiting resistor, page 46.

Manuals

Manual Switches

Electronic Control Pushbutton

AML21 Series

INCANDESCENT OR NON-LIGHTED DISPLAY



Buttons ordered separately.

Electrical Data	page 11
Buttons	page 30/31
Lamps and LEDs	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/50

FEATURES

- 1, 2, or 4 poles.
- Silver or gold contacts.
- Full guard bezel option.
- Momentary or 2-level alternate action (push-on, push-off).
- UL recognized, CSA certified.
- Lamps can be furnished installed or ordered separately.
- Lamp circuit independent of switch circuit.



*AML21 Series: 1 pole and 2-pole only.

AML21 ORDER GUIDE

AML21 B

Housing Type	Bezel Color	Incandescent Lamp Type	Terminal Type	Circuitry Codes (Each pole has double-throw)	
Standard Bezel: AML21B Square Non-Lighted AML21C Square 1 Lamp Ckt. AML21E Rect. Non-Lighted AML21F Rect. 1 Lamp Ckt. AML21G Rect. 2 Lamp Ckts.	B Black	A No Lamp Installed B 6 V Lamp* C 14 V Lamp* E 28 V Lamp*	2 .110 × .020 (Solder or Quick-Connect) 3 .025 × .025 (Printed Ckt. or Push-On)	Silver Contacts	Mom. Action AA 1-Pole AC 2-Pole CC 4-Pole Alt. Action AB 1-Pole AD 2-Pole CD 4-Pole
Full Guard Bezel: AML21H Square Non-Lighted AML21J Square 1 Lamp Ckt. AML21K Rect. Non-Lighted AML21L Rect. 1 Lamp Ckt. AML21M Rect. 2 Lamp Ckts.				Gold Contacts	Mom. Action BA 1-Pole BC 2-Pole DC 4-Pole Alt. Action BB 1-Pole BD 2-Pole DD 4-Pole
				Gold-Plated Silver Contacts	Mom. Action EA 1-Pole EC 2-Pole Alt. Action EB 1-Pole ED 2-Pole

* Lamps will be installed per each lamp circuit specified in the Housing Type.

Example: **AML21BBA2AA**
Square pushbutton switch housing non-lighted; black bezel; .110 × .020 termination; momentary action; 1-pole, double-throw; silver contacts.

Manual Switches

Electronic Control Pushbutton

AML22 Series

LED DISPLAY



Buttons with LED "window" ordered separately.
LEDs are not replaceable.

FEATURES

- Identical to AML21 switches, except furnished with high efficiency LED display.
- Rectangular LED's are flush with button surface, providing wide angle indication.
- Optional diode protection for LED's.
- 5 thru 24 VDC LED devices have an internal resistor to maintain current at nominal 20 mA.
- UL recognized, CSA certified.
- LED circuit independent of switch circuit.

Electrical Data	page 11
Buttons	pages 30/31
Lamps and LEDs	page 46
Accessories	pages 44/45
Mounting Dimensions	pages 47/50



*AML22 Series: 1 pole and 2-pole only.


AML22 ORDER GUIDE

AML22 C		B	B	2	AA	
Housing Type		Bezel Color	LED Color/ Voltage	Terminal Type	Circuitry Codes (Each pole has double-throw)	
Standard Bezel: AML22C Square 1 LED AML22H Square 1 High-Profile LED (For use with AML52-A buttons) Full Guard Bezel: AML22J Square 1 LED		B Black	Red	2 .110 × .020 (Solder or Quick-Connect)	Silver Contacts	Mom. Action AA 1-Pole AC 2-Pole CC 4-Pole
			Yellow	3 .025 × .025 (Printed Ckt., or Push-On)		Alt. Action AB 1-Pole AD 2-Pole CD 4-Pole
			Green	8 .110 × .020 With Diode Protection for LED	Gold Contacts	Mom. Action BA 1-Pole BC 2-Pole DC 4-Pole
						Alt. Action BB 1-Pole BD 2-Pole DD 4-Pole
					Gold-Plated Silver Contacts	Mom. Action EA 1-Pole EC 2-Pole
						Alt. Action EB 1-Pole ED 2-Pole

* See LED information for devices without current limiting resistor, page 46.

Example: **AML22CBB2AA**
Square pushbutton switch housing with one LED, black bezel; red LED (without resistor); .110 × .020 termination; momentary action, 1-pole, double-throw; silver contacts.

CONTACT ARRANGEMENT

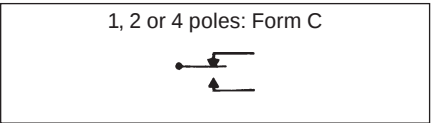


Manuals

Manual Switches
Electronic Control Paddle

AML23 Series

INCANDESCENT OR NON-LIGHTED DISPLAY



Covers ordered separately.

FEATURES

- Silver or gold contacts.
- 1, 2 or 4 poles.
- Toggle type paddle operators permanently installed in rectangular housings.
- Covers for the switch housing may be lighted or unlighted.
- UL recognized, CSA certified.
- Lamps can be furnished installed or ordered separately.
- Lamp circuit independent of switch circuit.

Electrical Data	page 11
Paddle Covers	page 35
Lamps and LEDs	page 46
Accessories	page 45
Mounting Dimensions	pages 47/50




*AML23 Series: 1 pole and 2-pole only.

*AML23 ORDER GUIDE

Housing Type	Operator/Bezel Color	Incandescent Lamp Type	Terminal Type	Circuitry Codes	Operating Action
AML23 E Rectangular Non-Lighted	B Black/Black	A No Lamp Installed	2 .110 × .020 (Solder or Quick-Connect)	AA Insert Code letters as shown in Circuitry Chart	01 Insert Code numbers from Operating Action Chart
AML23 F Rectangular 1 Lamp Ckt. (A)		B 6 V Lamp*	3 .025 × .025 (Printed Ckt., or Push-on)		
AML23 G Rectangular 2 Lamp Ckts. (A & B)		C 14 V Lamp*			
		E 28 V Lamp*			

* Lamps will be installed per each lamp circuit specified in the Housing Type.



① The "MICRO SWITCH" identification is shown on this side of the switch housings.

Example: **AML23EBA2AA01**
Rectangular non-lighted paddle switch housing; black paddle and bezel; .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).

CIRCUITRY

Silver Contacts	Gold Contacts	2-Position	3-Position	
AA	BA			
AC	BC			
(Non-illuminated switches only)				
CA	DA			
CC	DC			
(Non-illuminated switches only)				

OPERATING ACTION


2-Position:		
Maint.	01 None	Maint.
Mom.	02 None	Maint.
Maint.	03 None	Mom.
3-Position:		
Maint.	04 Maint.	Maint.
Mom.	05 Maint.	Mom.
Maint.	06 Maint.	Mom.
Mom.	07 Maint.	Maint.

Manual Switches

Electronic Control Paddle

AML25 Series

LED DISPLAY



Covers with LED "window" ordered separately.

FEATURES

- Identical to AML23, except furnished with one or two rectangular high efficiency LED's which give flush display area and wide angle indication.
- Available with or without diode protection for LED's.
- LED circuit independent of switch circuit.

Electrical Data	page 11
Paddle Covers	page 36
Lamps and LEDs	page 46
Accessories	page 45
Mounting Dimensions	pages 47/50

- 5 thru 24 VDC devices have internal resistor to maintain current at nominal 20 mA.
- UL recognized, CSA certified.



*AML25 Series: 1 pole and 2-pole only.

AML25 ORDER GUIDE



AML25 F

Housing Type	Operator/ Bezel Color	LED Voltage	Terminal Type/ Diode Protection	Circuitry Codes	Operating Code	LED Color (LED A)	LED Color (LED B)
AML25 F Rectangular 1 LED	B Black/Black	B V*	2 .110 × .020 (Solder or Q-C)	Insert code letters as shown in Circuitry Chart	Insert code numbers from Operating Action Chart	R Red	R Red
AML25 G Rectangular 2 LED's		C 5 V	3 .025 × .025 (Printed Ckt., or Push-On)	LED version available only with AA circuitry		Y Yellow	Y Yellow
		D 10 V	8 .110 × .020 w/Diode protection			G Green	G Green
		E 15 V				X No LED	X No LED
		F 24 V					

* See LED application information for devices without current-limiting resistor, page 46.

Example: **AML25FBB2AA01RX**
Rectangular paddle switch; illuminated with one red LED, this device has a black paddle and bezel, and .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).

NOTE: For further information on replacement LED's, call the 800 number.

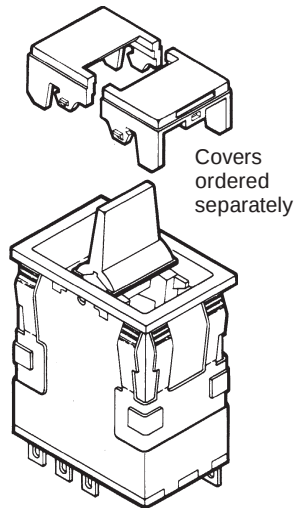


① The "MICRO SWITCH" identification is shown on this side of the switch housings.

Manuals

Manual Switches
Electronic Control Rocker

AML24 Series

INCANDESCENT OR NON-LIGHTED DISPLAY



Rocker operators ordered separately.


- Silver or gold contacts.
- 2 or 3 position operation.
- UL recognized, CSA certified.
- Lamps can be furnished installed or ordered separately.
- Lamp circuit independent of switch circuit.

Electrical Data page 11
Rockers page 39
Lamps page 46
Accessories pages 44/45
Mounting Dimensions pages 47/50

UL, CSA, DVE, CE certification logos.
*AML24 Series: 1 pole and 2-pole only.

AML24 ORDER GUIDE
AML24 E

Order guide form with sections: Housing Type (AML24 E, F, G), Bezel Color (B), Incandescent Lamp Type (A, B, C, E), Terminal Type (2, 3), Circuitry Codes (AA), and Operating Action (01).



* Lamps will be installed per each lamp circuit specified in the Housing Type.

Example: AML24EBA2AA01
Rectangular non-lighted rocker switch housing; black bezel; .110 x .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).

CIRCUITRY

Table showing circuit diagrams for Silver and Gold contacts in 2-Position and 3-Position configurations. Includes terminal block diagrams for 3, 2, 1 and 6, 5, 4 terminals.


OPERATING ACTION

Table showing operating actions for 2-Position and 3-Position switches. Columns include Maint., Mom., and specific action codes (01, 02, 03, 04, 05, 06, 07).

Manual Switches
Electronic Control Rocker

AML26 Series

LED DISPLAY



Rocker operators ordered separately.
LEDs are not replaceable.

FEATURES

- Identical to AML24, except furnished with one or two rectangular high efficiency LED's which give flush display area and wide angle indication.
- Available with or without diode protection for LED's.
- LED circuit independent of switch circuit.

Electrical Data	page 11
Rockers	page 40
Lamps and LEDs	page 46
Accessories	page 45
Mounting Dimensions	pages 47/50

- 5 thru 24 VDC LED devices have internal resistor to maintain current at nominal 20 mA.
- UL recognized, CSA certified.




*AML26 Series: 1 pole and 2-pole only.

AML26 ORDER GUIDE
AML26 F


Housing Type	Bezel Color	LED Voltage	Terminal Type/ Diode Protection	Circuitry Codes	Operating Action	LED Color (LED A)	LED Color (LED B)
AML26 F 1 LED	B Black	B V*	2 .110 × .020 (Solder or Quick-Connect)	Insert code letters as shown in Circuitry Chart	Insert code numbers from Operating Action Chart	R Red	R Red
AML26 G 2 LED's		C 5 V	3 .025 × .025 (Printed Ckt., or Push-On)	LED version available only with AA, BA, CA, DA circuitry		Y Yellow	Y Yellow
		D 10 V	8 .110 × .020 w/Diode for LED protection			G Green	G Green
		E 15 V				X No LED	X No LED
		F 24 V					

* See LED application information for devices without current-limiting resistor, page 46.

Example: **AML26FBB2AA01RX**
Rectangular rocker switch; illuminated with one LED, this device has a black bezel, .110 × .020 terminals; with one circuit ON and one circuit OFF in each extreme operator position (maintained).



① The "MICRO SWITCH" identification is shown on this side of the switch housings.

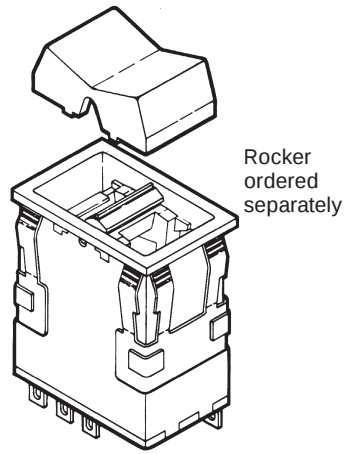

Rocker ordered separately

Manuals

Manual Switches
Electronic Control Keylock

AML27 Series

NON-LIGHTED



FEATURES

- Enable control of access to computer peripherals, keyboards, point-of-sale terminals, and security systems which are locked when unattended; and other locations where tampering must be discouraged.
 - 2 or 3 positions, maintained (90° throw) and momentary action (60° throw).
 - 5-bit key combinations
- Electrical Data

Accessories

Mounting Dimensions
- page 11

pages 44/45

pages 47/50
- UL recognized, CSA certified.
 - Static discharge protection (up to 20 kV when grounded).

AML27 ORDER GUIDE

AML27 A	B	K	2	AA	21	BA
Housing Type	Bezel Color	Button Color	Terminal Type	Circuitry Codes (Each pole has double-throw)	Operation Action (Key out in center position, except where noted)	Key Combinations
AML27 A	B	K	2	Silver Contacts: AA	CCW	(Two Keys Furnished)
Square housing	Black	Black	.110 x .020 (Solder or Quick-Connect)	1 pole AC	Center	BA BS
Non-Lighted			3	2 pole BC	CW	BB BT
			.025 x .025 (Printed Circuit or Push-On)	Gold Contacts: BA		BD BV
				1 pole		BE BW
				2 pole		

REPLACEMENT KEYS

One key per listing.

Key Combination	Key Code	Catalog Listing
BA	110	30PA101-AML
BB	109	30PA102-AML
BD	107	30PA104-AML
BE	106	30PA105-AML
BS	117	30PA117-AML
BT	118	30PA118-AML
BV	119	30PA119-AML
BW	120	30PA120-AML

Specify different Key Combinations to acquire different keys, i.e.; AML27ABK2AA21BB and AML27ABK2AA21BE have different keys. AML27ABK2AA21BB and AML27ABK3BC25BB have identical interchangeable keys. Example: AML27ABK2AC28BB Square housing; black bezel and button; .110 x .020 terminals; 2-pole double-throw; silver contacts; 3-position maintained and key code "BB".

CIRCUITRY

2-Position Switches:

	Normal Position*	Key Turned to Right (CW)
1 Pole	3 2 1	3 2 1
2 Pole	3 2 1 6 5 4	3 2 1 6 5 4

Note: These keys fit the 5-bit keylocks in the Order Guide.

3-Position Switches (Available in 2-pole only.)


	Key Turned to Left (CCW)	Normal Position*	Key Turned to Right (CW)
2 Pole	3 2 1 6 5 4	3 2 1 6 5 4	3 2 1 6 5 4

* Circuit remains the same with key in or out.

Manual Switches
Power Duty Pushbutton

AML31/32 Series

INCANDESCENT, NEON, OR NON-LIGHTED DISPLAY

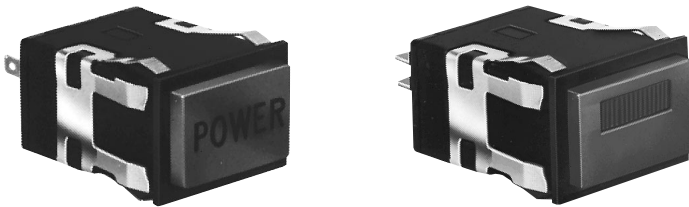

Buttons ordered separately.

CONTACT ARRANGEMENT



Electrical Data page 11
Buttons page 30
Lamps and LEDs page 46
Accessories pages 44/45
Mounting Dimensions page 48

- FEATURES
• UL recognized, CSA certified.
• AML31 lamp circuit independent of switch circuit.



*AML31 Series: 2-pole.
*AML32 Series: 2-pole.

AML31 ORDER GUIDE

AML31 accepts one incandescent lamp which can be furnished installed or ordered separately.

Table with 5 columns: AML31 E (Housing Type), B (Bezel Color), A (Incandescent Lamp Type), 4 (Terminal Type), and AC (Circuitry Codes). It details options for housing (Standard/Full Guard), bezel (Black), lamp types (No lamp, 6V, 14V, 28V), terminal types (.187 x .020), and circuitry (2-Pole, Single-Throw).

* Lamps will be installed per each lamp circuit specified in the Housing type.

Example: AML31EBA4AC
Rectangular pushbutton switch housing, non-lighted; black bezel; .187 x .020 terminals; momentary action; 2-pole, single-throw, normally open, Form X.


Manuals

AML32 ORDER GUIDE

AML32 has neon lamp wired to 125 or 250 VAC resistor.

Table with 5 columns: AML32 F (Housing Type), B (Bezel Color), C (Neon Lamp Voltage/Color), 7 (Terminal Type Lamp Circuit), and AC (Circuitry Codes). It details options for housing (Standard/Full Guard), bezel (Black), neon lamp types (Red, Clear, Green), terminal types (.187 x .020), and circuitry (2-Pole, Single-Throw).

Example: AML32FBC7AC
Rectangular pushbutton switch housing; black bezel; 250 volt, red neon lamp; .187 x .020 terminals with integral lamp circuit; momentary action; 2-pole, single-throw, normally open, Form X.

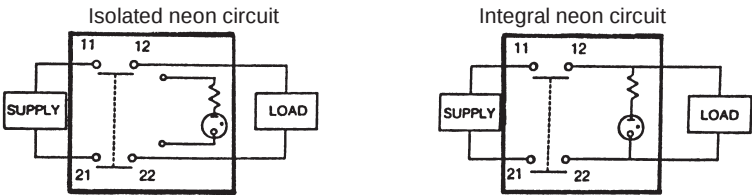


Manual Switches

Power Duty Paddle


AML33/35 Series

INCANDESCENT, NEON, OR NON-LIGHTED DISPLAY

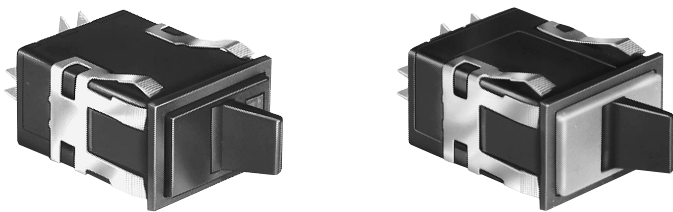

Colored housing covers ordered separately.

CONTACT ARRANGEMENT



Electrical Data	page 11
Paddle Covers	page 35
Lamps	page 46
Mounting Dimensions	page 48

FEATURES


- Toggle type paddle operators permanently installed in rectangular housings.
- 2-position maintained action.
- AML33 lamp circuit independent of switch circuit.
- UL recognized, CSA certified.



*AML33 Series: 2-pole only.
*AML35 Series: 1-pole and 2-pole.

AML33 ORDER GUIDE


AML33 accepts one incandescent lamp which can be furnished installed or ordered separately.

AML33 E	B	A	4	AA	01
Housing Type	Operator/Bezel Color	Incandescent Lamp Type	Terminal Type	Circuitry Codes	Operating Action
AML33 E Rectangular Non-Lighted	B Black/Black	A No Lamp Installed	4 .187 × .020 (Solder or Quick-Connect)	Silver Contacts: AA 1-Pole (One Form A Single-throw, Normally-Open)	 01 Maint. ON
AML33 F Rectangular 1 Lamp Ckt.		B 6 V Lamp*		AC 2-Pole (Two Form A)	 Maint. OFF
		C 14 V Lamp*			
		E 28 V Lamp*			

* Lamps will be installed per each lamp circuit specified in the Housing Type.

AML35 ORDER GUIDE

AML35 has neon lamp wired to 125 or 250 VAC resistor.

AML35 F	B	B	4	AA	01
Housing Type	Operator/Bezel Color	Neon Lamp Voltage	Terminal Type/ Lamp Circuit †	Circuitry Codes	Operating Action
AML35 F Rectangular 1 Neon Lamp	B Black/Black	Red B 125 VAC	4 .187 × .020 (Solder or Quick-Connect) With Isolated Lamp Circuit	Silver Contacts: AA (One Form A Single-Throw) Available only with isolated lamp circuit, term. type 4.	 01 Maint. ON
		C 250 VAC	7 .187 × .020 With Integral Lamp Circuit (Available with 2-Pole devices only)	AC 2-Pole (Two Form A)	 Maint. OFF
		Green M 125 VAC			
		P 250 VAC			


† The “MICRO SWITCH” identification is shown on this side of the switch housing.

Example: **AML35FBB4AA01**
Rectangular paddle switch housing; black paddle and bezel; 125 VAC neon lamp; .187 × .020 terminals with isolated lamp circuit; 1-Pole Form A Single-Throw; with circuit ON in one extreme position and OFF in the other (maintained).

Manual Switches
Power Duty Rocker

AML34/36 Series

INCANDESCENT, NEON, OR NON-LIGHTED DISPLAY

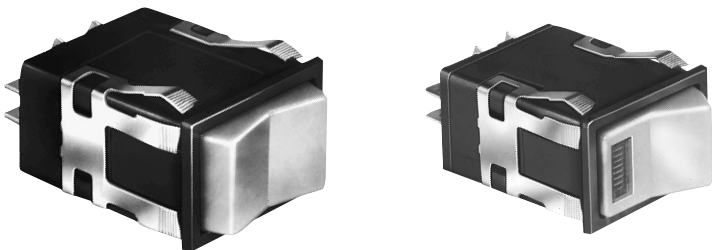

Rocker operators ordered separately.

Table with 2 columns: Category and Page Number. Rows include Electrical Data (page 11), Rockers (page 39), Lamps (page 46), and Mounting Dimensions (page 48).

- FEATURES
- Same circuitry, and electrical rating as power duty paddle switches.
 - Neon lamp circuitry can be isolated or integral on 2-pole switches; isolated-only on 1-pole switches (see schematics).
 - UL recognized, CSA certified.
 - AML34 lamp circuit independent of switch circuit.

UL, CSA, DVE, and CE certification logos. Text: AML34 Series: 2-pole only. AML36 Series: 1-pole and 2-pole.

AML34 ORDER GUIDE

AML34 accepts one incandescent lamp which can be furnished installed or ordered separately.

AML34 ORDER GUIDE table with columns: Housing Type, Bezel Color, Incandescent Lamp Type, Terminal Type, Circuitry Codes, and Operating Action.

* Lamps will be installed per each lamp circuit specified in the Housing Type.


AML36 ORDER GUIDE

AML36 has neon lamp wired to 125 or 250 VAC resistor.

AML36 ORDER GUIDE table with columns: Housing Type, Bezel Color, Neon Lamp Voltage, Terminal Type/Lamp Circuit, Circuitry Codes, and Operating Action.

① The "MICRO SWITCH" identification is shown on this side of the switch housing.

Example: AML36FBB4AA01
Rectangular rocker switch housing; black bezel; 125 VAC neon lamp; .187 x .020 terminals with isolated lamp circuit; 1-Pole Form A single-throw; with circuit ON in one extreme position and OFF in the other.

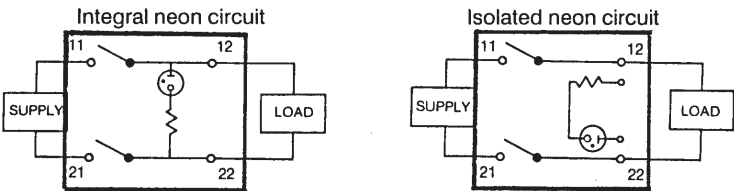

Manual Switches

Lighted Indicators

AML41/42 Series

To order lamps see page 46.

FEATURES

- Pushbutton style indicators match display of standard bezel lighted switches. Choice of incandescent or LED illumination.
- Lens style indicators use a special cap-like button which covers the bezel to present a larger display area, without affecting family appearance. Up to 3-lamp split screen capability. Incandescent illumination.



AML41
(Use AML51 push-buttons only.
Page 30.)



AML41
(Use AML51-J/-K/-L lens buttons only.
Page 30.)

AML41 INCANDESCENT DISPLAY INDICATORS ORDER GUIDE

AML41 C		B	A	2
Housing Type		Bezel Color	Incand. Lamp Type	Terminal Type
Pushbutton Style:	Lens Style:			
AML41 C Square 1 lamp ckt.	AML41 J Rectangular 1 lamp ckt.	B Black	A No lamp installed	2 .110 × .020 (Solder or Quick-Connect)
AML41 D Square 2 lamp ckts.	AML41 K Rectangular 2 lamp ckts.		B 6 V Lamp*	3 .025 × .025 (Printed Circuit or Push-On)
AML41 F Rectangular 1 lamp ckt.	AML41 L Rectangular 3 lamp ckts.		C 14 V Lamp*	
AML41 G Rectangular 2 lamp ckts.			E 28 V Lamp*	

* Lamps will be installed per each lamp circuit specified in the Housing Type.

Examples:

AML41CBA2

Square (pushbutton style) indicator housing with one lamp circuit; black bezel; .110 × .020 termination.

AML41JBA2

Rectangular (lens style) indicator housing with one lamp circuit; black bezel; .110 × .020 termination.



AML42C
(Use AML52-C/-A pushbuttons only.
Page 31.)



AML42S

AML42 LED DISPLAY INDICATORS ORDER GUIDE

LEDs are not replaceable.

AML42 S		B	C	2	
Housing Type	Bezel Color	LED Color/Voltage		Terminal Type/ Diode Protection	
AML42 C Square 1 LED	B Black	Red		2 .110 × .020 (Solder or Q.C.)	8 .110 × .020 w/diode to protect LED
AML42 S Compact 1 LED		Yellow		3 .025 × .025 (Printed Circuit or Push-On)	9 .025 × .025 w/diode to protect LED
		Green			
		B V*			
		C 5 V			
		D 10 V			
		E 15 V			
		F 24 V			
		R V*			
		S 5 V			
		T 10 V			
		W 15 V			
		X 24 V			

Example: **AML42SBC2**


Compact indicator with black bezel; 5 volt red LED; .110 × .020 termination.

* See LED application data, page 46, for these devices without current-limiting resistor.

Manual Switches

Solid State LED Annunciators

AML45/59 Series

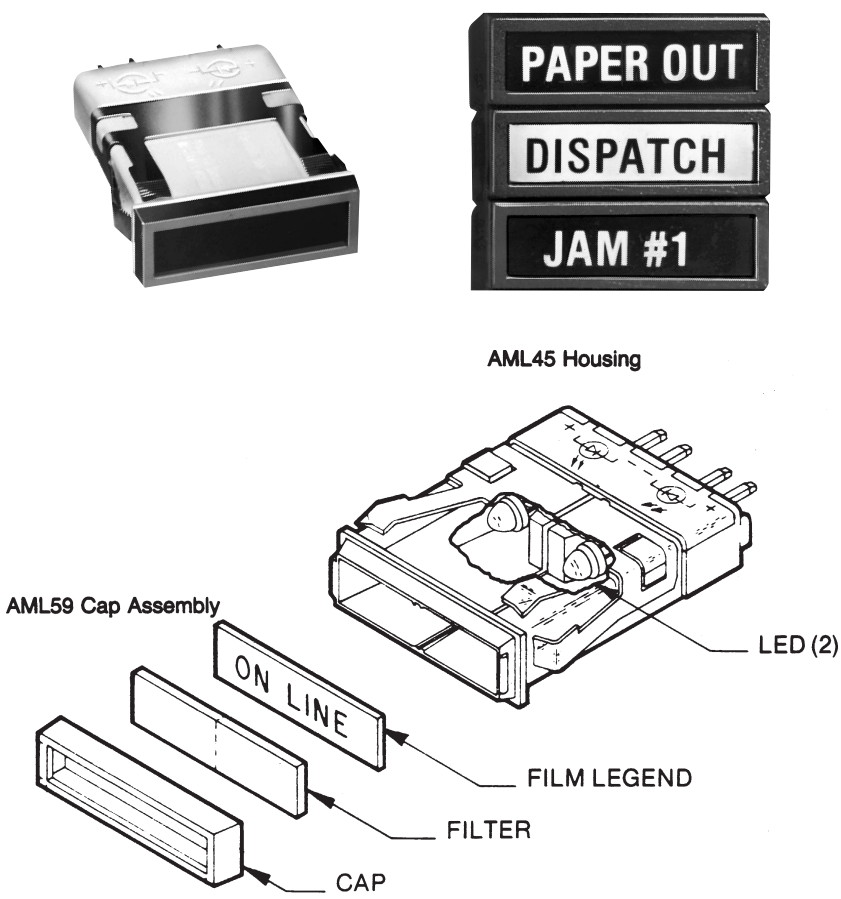

FEATURES

- Messages are backlit with LED's for long, reliable operating life. Reduces service and maintenance costs.
- Low voltage and current (without inrush), enables direct drive with integrated circuits. Reduces cost of interface components (and installation), and power supply.
- Low operating temperature allows high-density, continuous operation. Minimal heat build-up.
- Inherently rugged. Resists effects of shock and vibration (no filaments to break).
- High density message display. Illuminates up to four legend sectors in color, in a 0.8 x 1.2 inch area.
- Dead front hides legends until illuminated. Non-glare display with no flickering.
- UL recognized.

AML45/59 solid state LED annunciators are a state-of-the-art advancement over traditional back-lighted legend displays which utilize incandescent lamps. The LED light source imparts the benefits of solid state long-life and reliability, with low power requirements. Operating life is measured by years, instead of hours.

The AML45 housing has two high efficiency LED's which illuminate color filters and film legends located in the snap-on AML59 cap assembly. There is a choice of full face one-color and split one-color or two-color displays. Color options are red, green, and yellow.

Film legends offer a choice of negative or positive formats. (Note: human factors engineers generally favor negative annunciator messages, reserving the positive format for use if special attention is necessary, such as "PAPER JAM.")

When unlighted, the legend is hidden (dead front).

NEGATIVE

When illuminated, colored legend appears against a black background.



POSITIVE

When illuminated, black legend appears against a colored background.



This annunciator is totally compatible with other devices in the MICRO SWITCH AML Advanced Manual Line both in front of, and behind the panel. Two of them fit in the same space as a rectangular AML indicators or switch. All terminals exit at AML's standard 1.7-inch depth for convenient, single-level wiring.

Manuals

Manual Switches

Solid State LED Annunciators


AML45/59 Series

AML45 LED HOUSINGS

LEDs should be specified as the same color if a full or split screen one-color display is desired (RR = red); or different colors for a split screen two-color display (RY = red/yellow). (Baffle plate inside housing prevents light spillage from one LED color section to the other on split screen versions.)

LED colors should match filter colors specified in AML59 cap assembly (see page 28).

Spring clips on sides of the housing hold units securely in panel. For mounting strips of two or more units, AML61 mounting hardware may be used (see page 43).

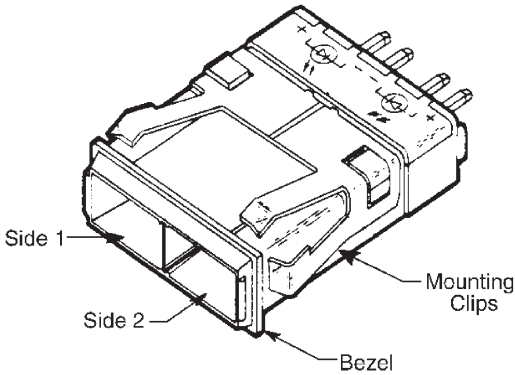

LED APPLICATION INFORMATION

Refer to page 47.

PANEL ORIENTATION

Drawing (above) indicates Side 1 and Side 2 LED locations, with MICRO SWITCH identifications facing UP. Consider this orientation when ordering an **AML45S** housing with two different LED

colors, such as RG (red/Side 1, green/Side 2). Since LED's are permanently installed, color location is specially important to note when the device is to be terminated in a printed circuit board.

AML45 ORDER GUIDE

AML45 S	W	A	2	RY	
				LED Color	
Housing Type	Color of Housing Bezel	LED Voltage*	Terminal Type	Side 1	Side 2
AML45 R 2 LED's (For use with Full Screen)	W White	A 2.4 V	2 .110 × .020 (Solder or Quick-Connect)	R Red	R Red
AML45 S 2 LED's (For use with Split Screen)	K Black	B 5 V	3 .025 × .025 (Printed Circuit)	Y Yellow	Y Yellow
		C 10 V	8 .110 × .020 with diode protection for LED's	G Green	G Green
		D 15 V			
		F 24 V			

* Current draw is 20 mA. "B", "C", "D" and "F" have built-in current limiting resistors.

Example: **AML45SWA2RY**
Split screen type housing with white bezel, 2.4 V LED's, .110 × .020 termination, red LED in Side 1 and yellow LED in Side 2.

Manual Switches

Solid State Annunciators

AML45/59 Series

SUBPANEL MOUNTING




Order AML45/59 annunciators and AML61 mounting hardware separately.

AML61 mounting hardware may be used for mounting strips of two or more annunciators in pairs in a single cutout. This method is most cost-effective for multi-unit application, since it generally takes less time to make one large hole to accept several units than it does to make a hole for each individual unit. Also, if the front panel is not required for mounting support, it can be made thinner, and easier to cut out, minimizing installed cost.

AML61 strips are factory assembled with metal cans welded together, and mounting brackets welded to the end cans. Refer to page 33 for ordering information.

INSTALLATION


Each rectangular AML61 mounting can will accommodate two annunciators, as shown in the drawing. Panel appearance is enhanced if a spacer .05 in./1.3 mm thick (approx.) is installed between the housings at the terminal end. Specify Catalog Listing 30PA1-AML for a package of 10 spacers.

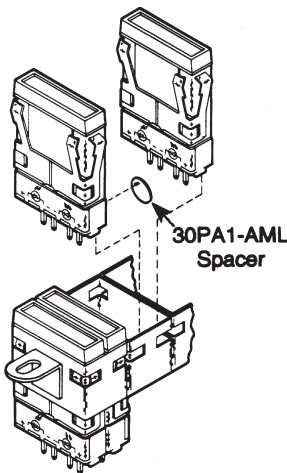

Mounting centers and panel cutout dimensions are shown on page 52. An installation instruction sheet PK8520 is shipped with each order.

PRINTED CIRCUIT BOARD DIMENSIONS

Suggested printed circuit board layout for up to ten AML45 units assembled in an AML61 assembly:

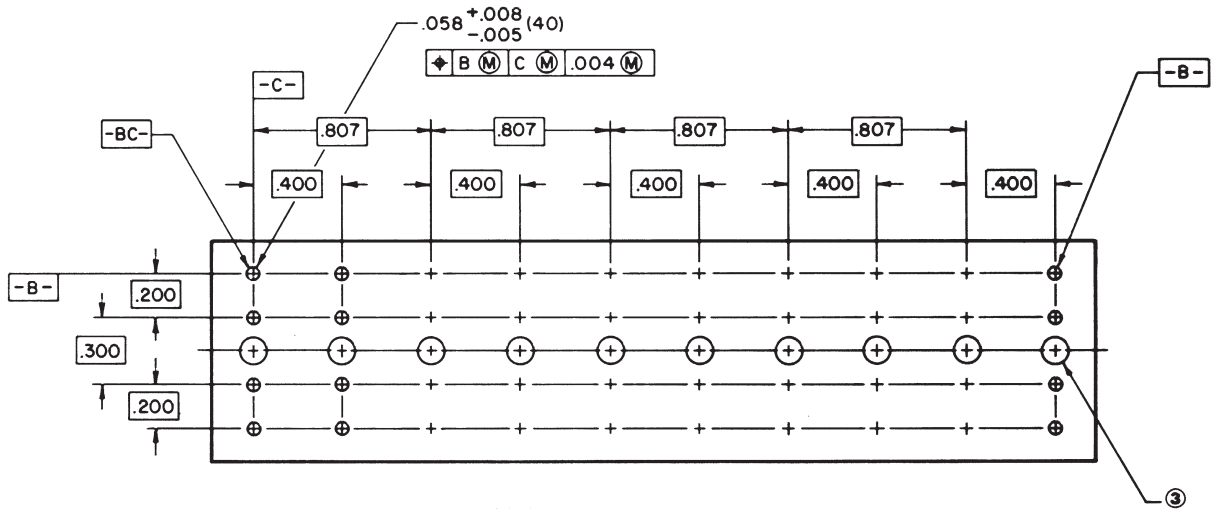

© .125" minimum diameter hole recommended to permit access to annunciator, allowing it to be driven out panel front should replacement become necessary.

Manuals


Maual Switches
Solid State LED Annunciators

AML45/59 Series

AML59 CAP ASSEMBLIES
The cap assembly consists of: black cap, color filter(s), and optional film legend; furnished unassembled. It snaps onto housing, flush with the housing bezel.

Filters, assembled with their matte finish facing the LED's, efficiently diffuse the illumination. They are color-tinted to complement the red, yellow, and green LED's.

NOTE: Cap assembly should not be subjected to the temperature and chemical atmosphere associated with wave soldering. These parts should be installed after soldering and cleanup.

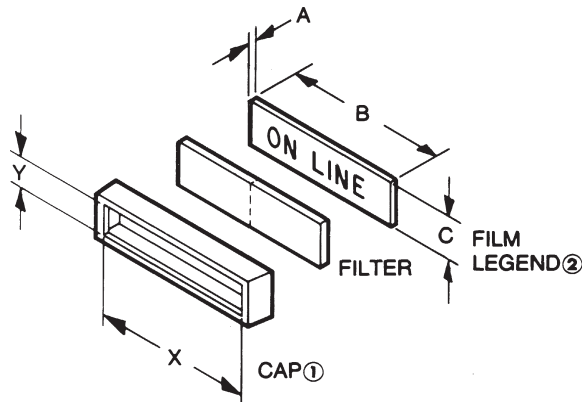

Catalog listings for AML59 cap assemblies are derived from the ordering guide below. The ordering guide for AML45 LED housings is on page 26.

CUSTOM LEGENDS
A 2:1 drawing in black ink is required for satisfactory reproduction of custom film legends. As an alternative, you may submit an office copy of a page from a typographic supplier catalog such as Charpak, Letraset, and Zipatone. MICRO SWITCH can also furnish graphic legends from the "Henry Dreyfus Symbol Source Book." (Custom legends require a one-time start-up charge.)

- 1 Viewing area inside cap: X = 1.04 min.; Y = .272 min.
2 Customers ordering film legends from commercial photographic or typesetting sources should specify that the film be precision cut, per the following dimensions, to insure proper retention and alignment on the face of the annunciator: A = .007 max.; B = 1.1 +/- .010; C = .300 +/- .003.

STANDARD LEGENDS
AML59 Legend Sheet (see page 30) provides ordering information for negative and positive standard film legends in the type style (14-point Helvetica condensed bold) shown below. Use separate legend sheet for each AML59 catalog listing and attach it (them) to your purchase order.

ABCDEFGHIJKLMN OPQRST
UVWXYZ &?!():',.-/#% 1/2
\$0123456789
Approx. .165"

Table with 4 main columns: Cap Style (AML59-R Full Screen, AML59-S Split Screen), Cap Color (K Black), Legend Type (10 No Legend, 20 Negative Film Legend, 21 Positive Film Legend), and Filter Color (Full Screen: R Red, Y Yellow, G Green; Split Screen: R Red, Y Yellow, G Green).

Examples:
AML59-RK10R
Full screen style, black cap, no legend, and red filter.



AML59-SK20RY
Split screen style, black cap, negative film legend, red and yellow color filters.

Honeywell

AML59 Legend Sheet



Account NO _____

Use this form to describe film legends to be used with AML59 Series Cover Assemblies



Style "R" (Full Screen)

Special Direction _____



Style "S" (Split Screen)

Special Direction _____

Catalog Listing AML59 –	Quantity Ordered
P.O. No.	Line No
Schedule No.	Customer Part No.
	Customer Dwg. No.

Customer: _____
Address: _____ (city) _____ (state)

INSTRUCTIONS:

1. Please use black ink to fill in shaded areas.
2. Fill in appropriate catalog listing. - One listing per sheet.
3. Fill in quantity ordered and your order no.
4. Indicate legends desired - do not exceed 9 characters for style "R" or 4 characters on either side of style "S".
5. This completed form must accompany your purchase order

- NOTES:
- Legends must be designed to properly assemble to housings, which are to be installed with the MICRO SWITCH logo "up".
 - All legends will be centered unless special directions are given.
 - Standard legends are 14 pt. helvetica, condensed - Bold. A thru Z and numerals 0 thru 9 are standard.
 - Legend Type: - Type "20" - Type "21"

POSITIVE

NEGATIVE

Manual Switches

Buttons/Lens for Switches and Indicators

AML51 Series


AML51 PUSHBUTTON ORDER GUIDE (All possible color combinations may not be available.)
For Incandescent or non-lighted display switches and pushbutton style indicators.

AML51-C

For AML11, 21, 31 switches and AML41 indicators:
Pushbutton Style


AML51-C

AML51-F

AML51-G

AML51-A


AML51-H

AML51-N*

AML51-B*

AML51-E*

AML51-M*

AML51-R*

For AML41D indicators only:

AML51-D

10

Display
Legend/Type

Transmitted Color
10 No legend
20 With legend
on cap.

Transmitted Color
(Clear cap and
color insert)
11 No legend
21 With legend
on insert

Dead Front
(Smoky gray cap
and color insert)
30 No legend
40 With legend
on insert

****Projected Color
(White cap and
color insert)
50 No legend
60 With legend
on cap

R

Full Color or
1st Color Split

R
Red
Y
Yellow
G
Green
B
Blue
W****
White
K***
Black
L***
Gray
A**
Amber

=

2nd
Color Split

R
Red
Y
Yellow
G
Green
B
Blue
W****
White
K***
Black
L***
Gray
A**
Amber

Example: AML51-C10R

Square full color button; with transmitted color,
no legend; red.

**Available with transmitted color and dead front only.

***Black and gray not recommended for lighted display.

†AML51-N buttons not available with Display/Legend Types
10 and 20.

Note: Dimensions include the .060 in bezel.

AML51 LENS ORDER GUIDE (All possible color combinations may not be available.)
For incandescent display AML41J, K, and L lens style indicators only.

AML51-J

Lens style

AML51-J

AML51-K

AML51-L

10

Display/Legend
Type

Transmitted Color
10 No legend
20 With legend

Transmitted Color
(Clear cap and
color insert)
11 No legend
21 With legend

Dead Front
(Smoky gray cap
and color insert)
30 No legend
40 With legend

****Projected Color
(White cap and
color insert)
50 No legend
60 With legend

R

Full Color
or 1st
Color Split

2nd
Color Split

3rd
Color Split

R
Red

Y
Yellow

G
Green

B
Blue

W****
White

A**
Amber

R
Red

Y
Yellow

G
Green

B
Blue

W****
White

A**
Amber

R
Red

Y
Yellow

G
Green

B
Blue

W****
White

A**
Amber

Example: AML51-J10R

Rectangular lens type button; full color;
transmitted color, no legend; red.

HOW TO ORDER BUTTON LEGENDS

When specifying legended buttons, sub-
mit a legend order sheet to cover each
listing. To insure proper legend orienta-
tion, AML housings (when viewed from
the panel front) should have the "MICRO
SWITCH" identification facing UP on
square devices and UP or to the LEFT on
rectangular.

Button legend order sheets are shown on
the following pages. Reproduce them on
your office copier.

Legend Sheet

AML51 Pushbuttons
AML51 Lens buttons
AML52 Pushbuttons
AML53 Paddle switch covers
AML55 Paddle switch covers
AML54 Rockers
AML56 Rockers

Form No.




FO-63394
FO-63395
FO-63504
FO-63567
FO-63565
FO-63566
FO-63564

**Not available with projected color.
****Insert is clear for projected color when "W" is used.

30 Honeywell • Sensing and Control • 1-800-537-6945 USA • +1-815-235-6847 International • 1-800-737-3360 Canada

Buttons for Switches and Indicators

AML52 BUTTON ORDER GUIDE (All possible color combinations may not be available.)
For AML12, AML22 (w/o light pipe), AML32, AML42 LED display.

AML52-N	10	R
Button Type For LED Devices AML52-C  AML52-A*  For AML32 Neon Devices AML52-N 	Display/Legend Type Transmitted Color 10 No Legend 20 With Legend	Button Color R Red Y Yellow G Green B Blue W White K Black A Amber L Gray

Examples:
AML52-N10R
Rectangular full screen; for use on neon power switch with transmitted color, no legend; red button.

AML52-C10K
Square full screen; for use with LED device; transmitted color, no legend; black button.

Honeywell

AML 52/57 Pushbutton Legend Sheet/Product Specification
for L.E.D. & Neon Button

Page ___ of ___

Account No _____

Catalog Listing
AML52 -
Customer P.O. No.
MICRO SWITCH Sales Order
Customer Dwg. No.
Line Number
Schedule No.

Customer:
Address:

(city) (state)

Instructions

- 1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #. Type size, type color.
3. Fill in quantity required.
4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

Note

- 1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

LEGEND ORDER GUIDE table with columns: Button: Type, Orientation, Figure NO, Max Lines (5/64, 7/64, 9/64, 13/64, 5/16), Max Characters (5/64, 7/64, 9/64, 13/64, 5/16)

Standard Legend Placement

- 1. Transmitted Color — Legend on outer shell (Button)
2. Figures 3 and 4 not applicable for AML57 listings

LEGEND ORDER CHART

LEGEND ORDER CHART table with columns: Customer Part NO, Fig NO, Type Size (5/64, 7/64, 9/64, 13/64, 5/16), Ink Color (Black, White), Button Qty, Legend Description (Left-to-Right or Top-to-Bottom), Sequence (1st Line, 2nd Line, 3rd Line)

FO-65604-D

Sheet Prepared By: _____ (Signature) _____ (Date)

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.
A3
Modified Gothic

SPECIAL LEGENDS
NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.
Fig. "A" Fig. "B"

Honeywell

AML Pushbutton Legend Sheet/Product Specification

Page ____ of ____

Account NO 126 - 284

LEGEND ORDER GUIDE

Table with columns: Button: Type, Orientation, Figure NO, Max Lines/Area, Max Characters/Line, and Max Characters/Line. Rows include various button types like A*B, PR, C, D, E,H*, F, G,N, and M.

Definitions of Markings

- Thru holes to snap into indicator housings
- Internal reliefs to snap over switch plunger tabs
- Standard Legend Placement - Use special legends sec. for other placements
- 1. Transmitted Color - Legend on outer shell (Button)
- 2. Dead Front - Legend on Insert
- 3. Projected Color - Legend on outer shell (Button)
- 4. Transmitted color with clear cap legend on insert

LEGEND ORDER CHART

Table with columns: Customer Part No, Fig No, Type Size, Ink Color, and But-ton Qty. Rows include various button types like A*B, PR, C, D, E,H*, F, G,N, and M.

FO-83394-K

Form fields for Catalog Listing, AML51, Customer P.O. No., Customer Dwg. No., MICRO SWITCH Sales Order, Line Number, Schedule No., Customer, Address, and (city) (state).

Instructions

- 1. Fill in appropriate catalog listing - one listing/sheet.
 - 2. Check proper figure #, Type size, Type color.
 - 3. Fill in quantity required.
 - 4. Indicate legends desired - Do not exceed maximums shown in legend order guide.
- Note
- 1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
 - 2. Please use black ink in filling out this form to help us process your order.
 - 3. * INSERT ONLY ON STYLE A & H BUTTON

SPECIAL LEGENDS

NOTE: Use this area to show special Legend Locations or Configurations NOT shown to the left. NON-STANDARD legends will involve additional charges and increased delivery time.

Form fields for A3 Modified Gothic, STANDARD SYMBOLS AVAILABLE, and various symbols like ., : ; ! ? , ' - " / () * &.

Fig. "A" Fig. "B"

Sheet prepared by:


(Signature)

(Date)

Manuals

Manual Switches

Covers for Paddle Switches

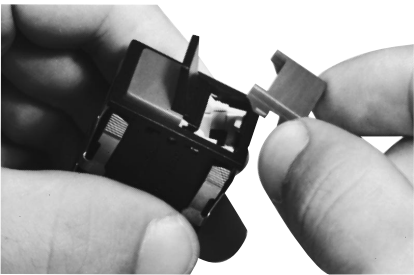

Colored covers simply snap into the top of paddle switch housings.

COLOR DISPLAY OPTIONS

Transmitted color — Color is displayed whether lamp is On or Off. Choice of 1-piece covers (types 10 or 20) or covers with clear cap and colored translucent insert (types 11 or 12).

Dead front hidden color/hidden legend — Cover appears black with lamp Off. Legend and color appear when illuminated (types 30 or 40).

Projected color — Translucent white cover with transparent colored insert (types 50 or 60). White cover appears colored when illuminated.

AML53 PADDLE SWITCH COVER ORDER GUIDE (All possible color combinations may not be available.)

For AML13, AML23, and AML33 incandescent or non-lighted display.

Paddle Switch Cover Type	Display/Legend Type	Cover Color	
		½ cover, or one side of two-piece cover	Other side of two-piece cover (see note)
 AML53-E ½ Cover	Transmitted Color 10 No legend 20 With legend on cap	R Red	R Red
	Transmitted Color (Clear cap and color insert) 11 No legend 21 With legend on insert	Y Yellow	Y Yellow
 AML53-T Two-Piece Cover	Dead Front (Smoky gray cap and color insert) 30 No legend 40 With legend on insert	G Green	G Green
	***Projected Color (White cap and color insert) 50 No legend 60 With legend on cap	B Blue	B Blue
		***W White	***W White
		K* Black	K* Black
		L* Gray	L* Gray
		A** Amber	A** Amber

Note: Only one color code letter is necessary when ordering ½ covers.

Example: **AML53-T10RG**
Two-piece cover; with transmitted color, no legend; red and green.

* Not for lighted display.
** Not available with projected color.
*** Insert is clear for projected color when "W" is used.

Manuals

AML55 PADDLE SWITCH COVER ORDER GUIDE (All possible color combinations may not be available.)

For AML35 neon display.

Paddle Switch Cover Type	Display/Legend Type	Lens Color	Cover Color
 AML55-N Full Neon Cover, with colored lens	Transmitted Color 10 No Legend	T Clear	R Red
	20 With Legend	R Red	Y Yellow
			G Green
			B Blue
			W White
			K Black
			L Gray

AML55-N covers have a colored lenticular lens window which extends over the neon lamp.

Example: **AML55-N10RY**
Full neon paddle switch cover; with transmitted color, no legend; red lens and yellow cover.




Manual Switches

Covers for Paddle Switches

AML55 Series

AML55 PADDLE SWITCH COVER ORDER GUIDE (All possible color combinations may not be available.)

For AML15 and AML25 LED display.

AML55-T	10	Y	R
		See notes below	
Paddle Switch Cover Type	Display/Legend Type	Cover Color – See notes below	
AML55-E  1/2 Cover (For one LED)*	Transmitted Color 10 No Legend 20 With Legend	1/2-cover, or LED side of two-piece covers*	Other side of two piece covers
AML55-T  Two-Piece Cover (For one LED)		R Red Y Yellow G Green B Blue W White K Black L Gray	R Red Y Yellow G Green B Blue W White K Black L Gray
AML55-H  Two-Piece Cover (For two LED's)			

AML55-E, -T, and -H covers have an open window which allows LED's to be flush with the cover surface.

- * Notes:
- ¹ Only one color code letter is necessary for AML55-E 1/2 covers.
 - ² To order a 1/2-cover without the LED "window," specify an AML53-E listing from the previous page.

Example: **AML55-T10YR**
Two-piece cover; with LED window in one side, transmitted color, no legend; yellow (LED side) and red (non-LED side).

HOW TO ORDER LEGENDS FOR PADDLE SWITCH COVERS

When specifying legended paddle switch covers, submit a legend order sheet to cover each catalog listing. These forms identify the maximum number of lines per area and the maximum characters per line, based on the type size you request.

To insure proper legend orientation, paddle switch housings (when viewed from the panel front) should have the "MICRO SWITCH" identification facing UP or to the LEFT.

Legend order sheets for covers are shown on the following pages. Reproduce them on your office copier or request a pad of them from the 800 number:

Legend Sheet	Form No.
AML53 Covers	FO-63567
AML55 Covers	FO-63565

Catalog Listing
AML53 –

[illegible]

Standard Legend Placement – 1. Transmitted Color—Legend on outer shell (Button

2. Dead Front—Legend on insert

3. Projected Color - Legend on outer shell (Button) for other placements.

4. Transmitted color with color with clear cap legend on insert.

5. All legends will be centered within the legendarable areas.

[illegible]

FO-63567-F

(Signature)

(Date)

Manuals

Catalog Listing
AML53 –

Customer P.O. No.	Customer Dwg. No.
MICRO SWITCH Sales Order	Schedule No.

Customer:

Address:

(city)

Instructions

1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #, Type size, Type color.
3. Fill in quantity required.
4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

Note

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.

A3

AVAILABLE

STANDARD SYMBOLS AND UNITS											
.	:	;	!	?	'	_	"	/	()	*	&
\$	¢	#	%	°	+	-	±	x	=	≠	∇
→	↗	↘	←	CR 1/41/23/41/3 2/3 @ ∞							

SPECIAL LEGENDS

NOTE: Use this area to show special Legend Locations or Configurations NOT shown above. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "B"


Fig. "A"

Manual Switches

Rocker Switch Operators

AML54/56 Series

COLOR DISPLAY OPTIONS

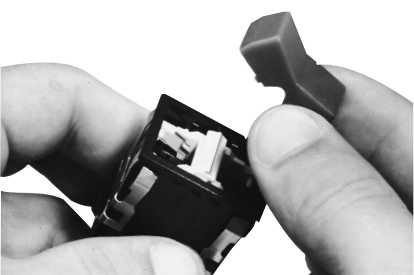

Rocker operators are assembled to the switches by simply snapping them into recesses in the switch operator sockets.



Transmitted color — Color is displayed whether lamp is On or Off. Choice of 1-piece rockers (types 10 or 20) or rockers with clear cap and colored translucent insert (types 11 or 12).

Dead front hidden color/hidden legend — Rocker appears black with lamp Off. Legend and color appear when illuminated (types 30 or 40).

Projected color — Translucent white rocker with transparent colored insert (types 50 or 60). White rocker appears colored when illuminated.

AML54 ROCKER OPERATOR ORDER GUIDE (All possible color combinations may not be available.)

For AML14, AML24, AML34 incandescent or non-lighted display.

AML54-F	10	R	
Rocker Operator Type	Display/Legend Type	Rocker Color – See Note Below	
AML54-F	Transmitted Color	Full rocker, 1/2 rocker, or one side of two-piece rockers	Other side of two-piece rockers
 Full Rocker	10 No legend 20 With legend on cap	R Red Y Yellow G Green B Blue ***W White K* Black L* Gray A** Amber	R Red Y Yellow G Green B Blue ***W White K* Black L* Gray A** Amber
AML54-E	Transmitted Color		
 1/2 Rocker	(Clear cap and color insert) † 11 No legend 21 With legend on insert		
AML54-T	Dead Front †		
 Two-Piece Rocker	(Smoky gray cap and color insert) 30 No legend 40 With legend on insert ***Projected Color † (White cap and color insert) 50 No legend 60 With legend on cap		


NOTE: AML54-F10 and AML54-F20 are one-piece, one-color full rockers. Thus only one color code letter is necessary when ordering. Include a two letter code for all other AML54-E (and AML54-T) catalog listings.

* Not for lighted display.
** Not available with projected color or dead front.
*** Insert is clear for projected color when "W" is used.
† Not available for use with AML34 power switches.

Example: **AML54-F10R**
Full rocker; with transmitted color, no legend; red.

AML56 ROCKER OPERATOR ORDER GUIDE

For AML36 neon display.

AML56-N	10	R	Y
Rocker Operator Type	Display/Legend Type	Lens Color	Rocker Color
AML56-N	Transmitted Color		
 Full Rocker with Colored Lens	10 No Legend 20 With Legend	T Clear R Red Y Yellow	R Red Y Yellow G Green B Blue W White K Black

AML56-N rockers have a colored lenticular lens window which extends over the neon lamp.

Example: **AML56-N10RY**
Full rocker; with transmitted color, no legend; yellow rocker and red lens.

Manuals



Manual Switches

Rocker Switch Operators

AML56 Series

AML56 ORDER GUIDE

For AML16 and AML26 LED display.

AML56-T	10	R	B
Rocker Operator Type	Display/Legend Type	Rocker Color – See Notes Below	
AML56-E  1/2-Rocker* (For one LED)	Transmitted Color 10 No Legend 20 With Legend	1/2-rocker or LED side of two-piece rockers	Other side of two piece rockers
AML56-T  Two-Piece Rocker (For one LED)		R Red Y Yellow G Green B Blue W White K Black L Gray	R Red Y Yellow G Green B Blue W White K Black L Gray
AML56-H  Two-Piece Rocker (For two LED's)			

Example: **AML56-T10RB**
Two-piece rocker; with LED window in one side, transmitted color, no legend; red (LED side) and blue (non-LED side).

HOW TO ORDER ROCKER LEGENDS

When specifying legended rockers, submit a legend order sheet to cover each catalog listing. These forms identify the maximum number of lines per area and the maximum characters per line, based on the type size you request. To insure proper legend orientation, rocker switch housings (when viewed from the panel front) should have the "MICRO SWITCH" identification facing UP or to the LEFT.

Rocker legend order sheets are shown on the following pages. Reproduce them on your office copier.

Legend Sheet	Form No.
AML54 Rockers	FO-63566
AML56 Rockers	FO-63564

* Notes:
¹ Only one color code letter is necessary for AML56-E 1/2-rockers. AML56-E, -T, and -H rockers have an open window which allows LEDs to be flush with the rocker surface.
² To order a 1/2-rocker without the LED "window," specify an AML54-E listing from the previous page.

AML Rocker Legend Sheet/Product Specification

Page ___ of ___

Account NO 126-284

Legend Order Guide

Legend Order Guide												
Button Type Orientation	Figure No	Max Lines/Area					Button Order	Max Characters/Line				
		5/64	7/64	9/64	13/64	5/16		5/64	7/64	9/64	13/64	5/16
AREA 1 E	1	2	2	2	1	1	0	7	5	5	3	1
AREA 1 E	2	2	2	2	1	1	0	7	5	5	3	1
AREA 1 F	3	2	2	2	1	1	0	7	5	5	3	1
AREA 2 T	4	2	2	2	1	1	0	7	5	5	3	1

Standard Legend Placement - 1. Transmitted Color—Legend on outer shell (Button

*2. Dead Front—Legend on insert

*3. Projected Color - Legend on outer shell (Button)

*NOT AVAILABLE WITH

5. All legends will be centered within the legendable areas.

LEGEND ORDER CHART

LEGEND ORDER CHART

[illegible]

EQ-83566-F

(Signature)

(Date)

Manuals

Manuals

Catalog Listing AML54 -		Customer Dwg. No.	
Customer P.O. No.		Line Number	Schedule No.
MICRO SWITCH Sales Order			

Customer: -

Address: _____

(city)

(state)

Instructions

1. Fill in appropriate catalog listing - one listing/sheet.
2. Check proper figure #, Type size, Type color.
3. Fill in quantity required.
4. Indicate legends desired — Do not exceed maximums shown in legend order guide.

Note

1. For Proper Legend Orientation, AML housings (when viewed from front of panel) should have "MICRO SWITCH" logo oriented "UP" on square devices and "UP" or to the "LEFT" on rectangular devices.
2. Please use black ink in filling out this form to help us process your order.

SPECIAL LEGENDS

NOTE: Use this area to show special Legend Locations or Configurations NOT shown below. NON-STANDARD legends will involve additional charges and increased delivery time.

Fig. "A"

Fig. "B"

Modified Gothic lettering (A thru Z), numerals (0 thru 9) and Symbols below available in 5/64, 7/64, 9/64, 13/64 and 5/16.

A3

Modified Gothic

STANDARD SYMBOLS AVAILABLE

.	:	:	:	!	?	'	-	"	/	(	)	*	&
\$	¢	#	%	°	+	-	±	÷	x	=	≠	>	<
→	↗	↓	←	C _R	1/41/23/4	1/3	2/3	@	∞				

Manual Switches

Mounting Hardware

AML61 Series

FOR STRIP AND MATRIX MOUNT ASSEMBLIES



FEATURES

- Enables subpanel mounting of devices in factory assembled metal cans which are welded together in strips or matrices. Assures accurate alignment and enables pre-wiring.
- L-shaped mounting brackets conform to various panel thicknesses, using spacers.
- Simplifies panel fabrication, since only one large cutout is required.
- Facilitates printed circuit board mounting. Operating force is transmitted to mounting hardware, rather than P.C. board.
- For custom matrices contact the MICRO SWITCH Application Center.
- Mounting dimensions page 52.

AML61 MOUNTING HARDWARE ORDER GUIDE


(For standard strip mount assemblies)

AML61 B		A	5	A
Type	Mounting Bracket Orientation	Number of Cans	Mounting Bracket Location	
Square cans: AML61 B (Plain finish) AML61 J (Black finish)	A E	1 2 3 4 5 6 7 8 9* 10* 11* 12*	0.060 A 0.020 G BRACKET FLUSH TO TOP OF CAN 0.045 K 0.030 B 0.050 L 0.060 C 0.065 P 0.120 E 0.085 T 1.460 F U NO BRACKETS	
Rect. cans: AML61 E (Plain finish) AML61 K (Black finish)	B C D 1			

① To order one rectangular can with mounting brackets on short sides, specify AML61EB1___ or AML61KB1___.

Example: AML61EC5A

Five rectangular cans, plain finish (un-painted), long sides abutting; type A mounting brackets on long sides, located flush with switch or indicator bezel. (Type T bracket brings top of annunciator bezel flush with top of .160 in./4,1 mm panel.)



This strip has Type F brackets for P.C. board mounting.

NON-STANDARD ASSEMBLIES

Use the order form on the following page to specify non-standard AML61 strip or matrix assemblies. You may reproduce it on your office copier, or order pads from the 800 number. Request FO-63558.


Manuals

Manual Switches

Barriers/Panel Seal Accessories

AML71/75 Series

AML71 BARRIERS

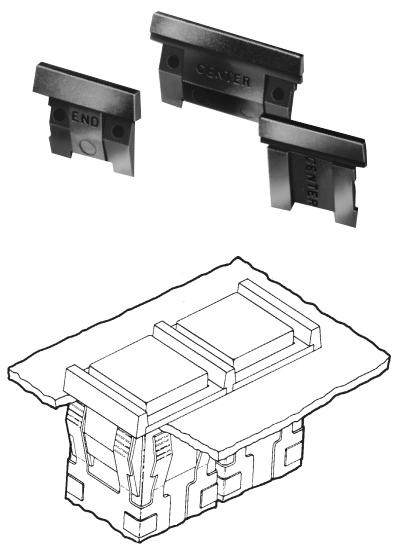

Drawing shows two switches, slot mounted. From left to right: one center barrier, a second switch, plus another end barrier to complete the arrangement.

When mounting an individual unit, an end barrier is attached to each side of the housing. The center barrier is used in a slot mount array.

FEATURES

- Barriers separate individually mounted switches and indicators — help prevent inadvertent actuation of two pushbutton switches with a single push.
- Front of panel mounting simplifies installation.

AML71 BARRIER ORDER GUIDE (See notes)



Barriers shown in order guide are black.

Barrier Length	Type	Catalog Listing
Short (For use with square devices and short side of rectangular devices.)	Center	AML71SCB
	End	AML71SEB
Long (For use with long side of rectangular devices.)	Center	AML71LCB
	End	AML71LEB

Notes:

Not for use with AML61 mounting hardware or any full guard bezel products.
Not for use with AML41J, K, or L lens type indicators; or AML45 annunciators.

AML75 PANEL SEAL

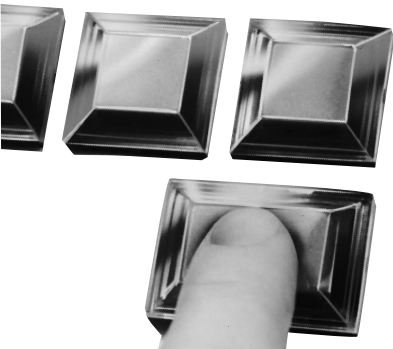

MATERIAL
Base: Polypropylene
Cap: Polyvinyl Chloride

FEATURES

- AML75 panel seals fit pushbutton switches and indicators.
- Provides protection from contamination from accidental beverage spills, dust, and dirt.
- Easy to install, without tools
- No effect on display color, light intensity, or legend quality.
- Replace seal or change lamps without removing switch from panel.
- For .19-inch standard height square or rectangular pushbuttons.
- Mounting dimensions page 53.

The design complements AML's functional appearance, creating a pleasing framed effect around the button. It consists of a matte black plastic base which press-fits between the panel and switch bezel, and a transparent flexible seal which snaps into the base. PK 8521, shipped with each order, provides installation instructions.

Button colors and legends can be viewed without distortion whether lighted or unlighted. Seals can be conveniently replaced or removed for relamping, without removing the switch from panel.

Operating temperature range is 32° to 131°F (0° to 55°C).

AML75 PANEL SEAL ORDER GUIDE

Description	For Use With:		
	Square .19" high pushbuttons	Rectangular .19" high pushbuttons	Rockers
Base & Seal	AML75ABC	AML75BBC	AML75RBC

Notes:



Multiple units should not be mounted in a single slot, since this would create an unsealed space between each unit. AML75 seals are not for use with barriers,

full guard bezels, AML61 mounting hardware, AML45 annunciators, or AML41J, K, or L lens type indicators.

Manual Switches

Switch Guard/Panel Plugs, Dummy Housings

AML76/78 Series

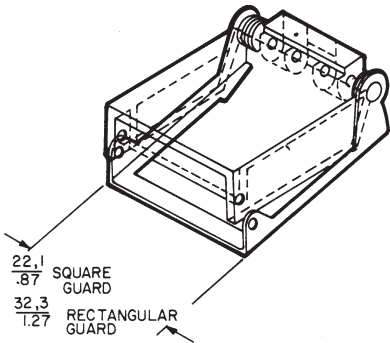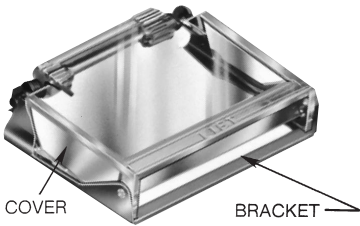

- FEATURES**
- Button cannot be operated when switch guard cover is closed, preventing accidental operation
 - Wire lock-down feature further prevents unintentional actuation of the switch.
 - Lamps can be replaced with the switch guard attached, without special tools, saving maintenance time
 - Can be used with alternate or momentary action square or rectangular .19 inch standard height AML buttons
 - Shock resistant construction, for long, maintenance-free life

AML76 switch guard protects square and rectangular .19-inch standard height pushbuttons from inadvertent actuation. It is for use with standard bezel type switches only.

See page 53 for mounting dimensions.

The switch guard cover is clear, polycarbonate thermoplastic through which the button is easily visible. The word “lift” is molded onto the top front edge of the guard. The bracket is bright-finished stainless steel.

The switch guard may be assembled to the AML pushbutton before the switch is installed in a panel. Or, the guard can be assembled to a pushbutton already mounted in a panel, providing the wiring is sufficiently slack to raise the switch bezel above the panel; and if there is sufficient clearance with adjacent units. PK 8522 contains installation instructions and is shipped with each order.

AML switch guards may be mounted in horizontal or vertical matrices. A wire lock-down feature, using .020-inch diameter locking wire, may be used as an additional protection.

SWITCH GUARD ORDER GUIDE	
Guard Type*	Catalog Listing
Square	AML76C10T01P
Rectangular	AML76F10T01P

* The word “LIFT” is molded into the cover. If other languages are desired contact the 800 number.
Note: Switch guard is not designed for use with AML61 mounting hardware, AML71 barriers, or full guard bezel switches.


CONNECTOR BLOCK



AML79CC

This connector block can be used with square 1 and 2 pole AML21 and AML22 switches with .110 × .020 terminals to enable plug-in wiring.

AML78 PANEL PLUGS

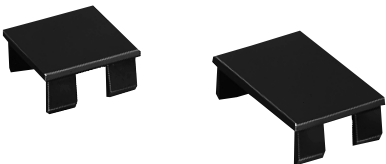

Plastic panel plugs (shown above) enable the user to provide for future needs by punching extra panel holes. Finished in matte black, they are the same height as the standard AML bezel when snapped in place from the panel front.

Panel plugs are only for use in individual holes or with AML61 mounting hardware in multi-station strips. (Use dummy housings in strip cutouts without AML61 mounting hardware.)

PANEL PLUG ORDER GUIDE	
Plug Type	Catalog Listing
Square	AML78CB
Rectangular	AML78FB

AML78 DUMMY HOUSINGS

Dummy housings can be used to provide for expansion needs in strip cutouts without AML61 mounting hardware. They have mounting clips, but there is no provision for switching or illumination.

DUMMY HOUSING ORDER GUIDE	
Dummy Housing Type*	Catalog Listing
Rectangular (Pushbutton style)	AML78F100
Rectangular (Lens indicator style)	AML78J100

* Order AML51 Buttons/lenses for use with dummy housings.

Manuals

Manual Switches

Lamps, Soldering Recommendations, Receptacles

AML91 Series

AML91 LAMP ORDER GUIDE

Lamp Type	Industry Lamp No.	Voltage	Catalog Listing
Incandescent T-1-3/4 wedge base	86	6.3	AML91LA86
	73	14.0	AML91LA73
	85	28.0	AML91LA85

LAMP DATA

The following data was compiled from manufacturer's specifications, for reference only.

INCANDESCENT LAMPS

Industry Lamp No.	Volts	Amps	Watts	MSCP	Life A/C Volts
86	6.3	.200	1.25	.49	20,000 hours
	5.5	.185	1.12	.246	106,200 hours
	5.0	.177	.89	.185	290,000 hours
73	14.0	.080	1.12	.30	15,000 hours
	12.0	.077	1.00	.23	36,450 hours
85	28.0	.04	1.12	.30	7,000 hours
	24.0	.037	.89	.177	41,860 hours

Neon Lamps

25,000 hours (half life)

INTEGRAL LEDs

LEDs Furnished Permanently Installed in These Products	V _f	I _f	V _{PD}	Peak Inverse Voltage	
				w/o Diode Protection	w/Diode Protection
AML12, 15, 16, 22, 25, 26, 42	2.4 V	20 mA	.7 V	5 V	34 V
AML45	2.4 V	20 mA	.7 V	4 V	33 V

100,000 hours (half life).

AML92 SERIES LEDs



For use with these AML switches and indicators equipped with lamp sockets:
Pushbutton switches: AML11 (Square Only)*, AML21 (rectangular and square), and AML31.

Paddle switches: AML31/23/33

Rocker switches: AML14/24/34

Indicators: AML41

* Rectangular solid state with one or two lamp circuits cannot be used with LED catalog listings ending in "L".

AML92 ORDER GUIDE

LED Color	Quad Chip	Six Chip
Red	AML92ERY	AML92ERL
Green	AML92EGY	AML92EGL
Yellow	AML92EYY	AML92EYL
White	—	AML92EWL**

** For use with white or yellow buttons.

OPERATING CHARACTERISTICS

Type	V _f Fwd. Voltage (typ.)				I _f Fwd. Current	V _R Rev. Voltage
	Yellow	Green	Red	White		
Quad Chip	8.6	8.6	7.8	—	15 mA	16 V
Six Chip	4 V	4 V	4 V	4 V	50 mA	5.6 V

TEMPERATURE RANGE

(Quad Chip or Six Chip)

Operating: -20 to 60°C (-4 to 140°F)

Storage: -30 to 100°C (-22 to 212°F)

SOLDERING RECOMMENDATIONS

All terminals are solder plated. Proper soldering and cleaning procedures must be followed to maintain the reliability of AML products during installation. An instruction sheet which outlines these procedures is included with AML shipments. You may also obtain a copy from your MICRO SWITCH Sales Office. Request PK 8518.

As a general guide, the following information may be used:


Use a 280°C (538°F) solder iron tip, up to 6 seconds duration, with a 60-40 rosin core solder. This allows the terminal to heat quickly on the exterior of the housing only, and greatly reduces the chance of flux migrating inside the housing.

LED APPLICATION INFORMATION

For those devices without internal current limiting resistors, suitable external control of the LED current must be provided. It is recommended that a minimum of 5 VDC open circuit voltage with an appropriate series resistance be used to drive LED devices. This minimizes the effect of temperature (current variation) on forward voltage of the LED.

Resistor values can be determined by supply voltage or current for LED:

$$R_s = \frac{E - V_f}{I_f}$$



WHERE: R_s = Series Resistance
 E = Supply Voltage
 V_f = Forward Voltage of LED
 I_f = Circuit Current

If a diode is added in series for reverse polarity protection then:

$$R_s = \frac{E - V_f - V_{PD}}{I_f}$$


WHERE: V_{PD} Forward Voltage of Protection Diode

Mounting Dimensions (For Reference Only)

AML11/12 and 21/22 SWITCHES
AML41C/D and AML42C INDICATORS

Note: Top of full guard bezel housing
.19/5.0 from panel.


PUSHBUTTONS

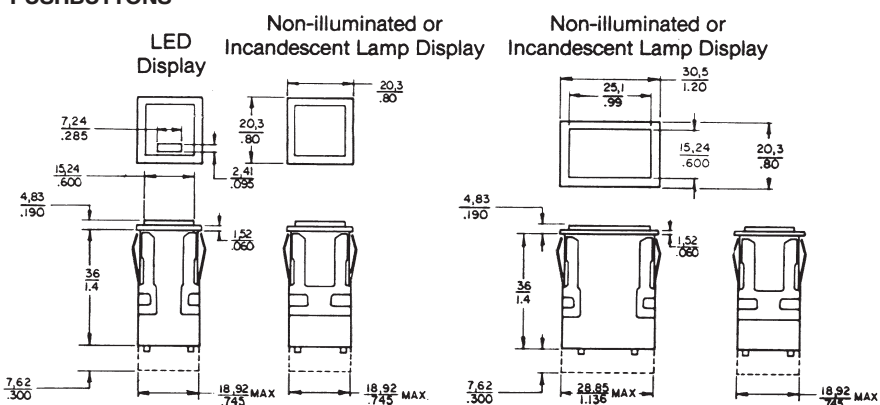

For terminal locations, see page 49.

AML27 SWITCHES


KEYLOCK

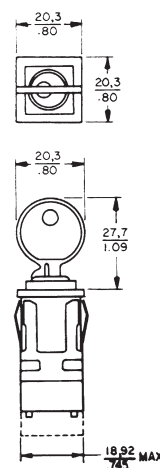

For terminal locations, see page 50.

AML14/16 and AML24/26 SWITCHES


ROCKERS

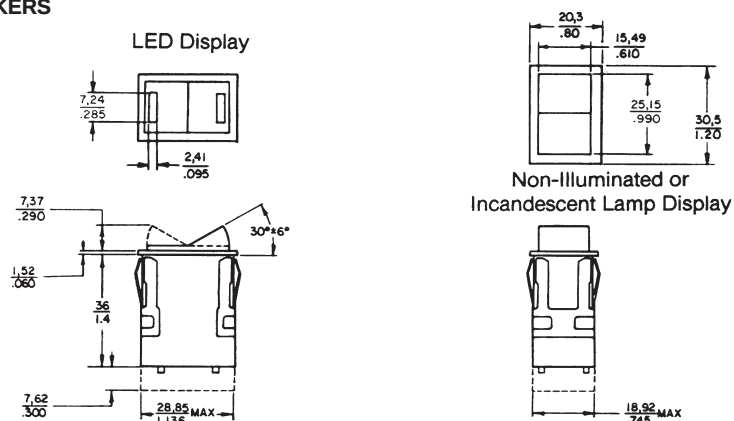

For terminal locations, see page 49/50.

AML13/15 and 23/25 SWITCHES


PADDLES

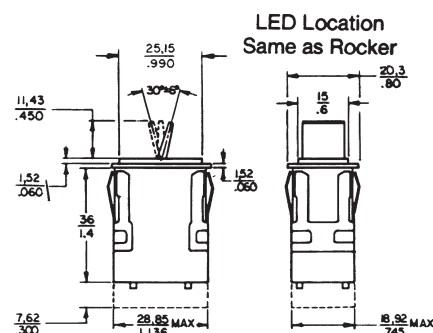

For terminal locations, see page 49/50.

AML41 INDICATOR


LENS STYLE

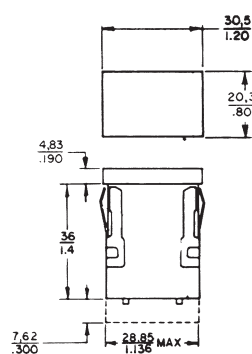


For terminal locations, see page 50.

AML42 INDICATOR


MINIATURE

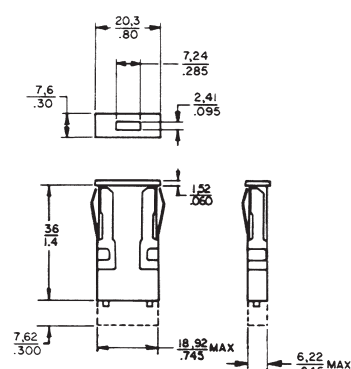

TERMINAL TYPES



Solder or Quick Connect



Printed Circuit









Solder Hole will accept two #22 AWG Stranded Conductor (per NEMA publication DC-2 1976)

NOTE
1 Dimensions are $\frac{\text{mm}}{\text{IN}}$ or mm/IN

Manual Switches

Mounting Dimensions (For Reference Only)

AML Series

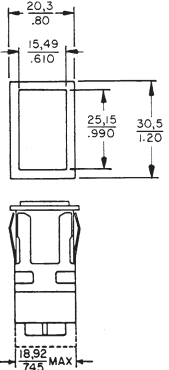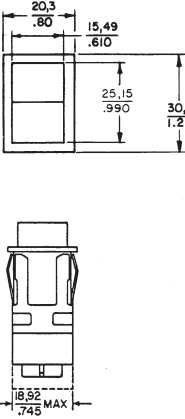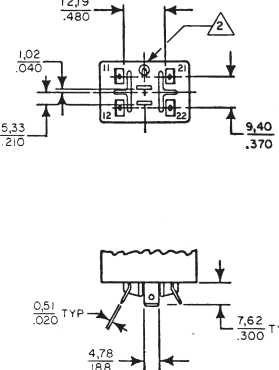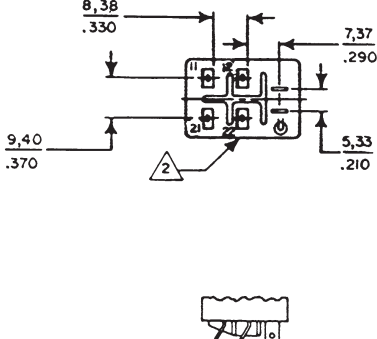
AML31/32 SWITCHES PUSHBUTTON Neon Display  Neon Display dimensions: 6.8 (.27) top, 2.0 (.08) offset, 4.83 (.190) height, 14.8 (.58) width, 7.62 (.300) base, 28.85 MAX terminal width, 1.136 terminal barrier. Non-illuminated or Incandescent Lamp Display  Non-illuminated or Incandescent Lamp Display dimensions: 20.3 (.80) top, 15.49 (.610) offset, 25.15 (.990) height, 30.5 (1.20) width, 18.92 MAX terminal width, 1.745 terminal barrier.	AML34/36 SWITCHES ROCKER Neon Display  Neon Display dimensions: 10.0 (.40) top, 7.37 (.290) height, 1.52 (.060) offset, 36 (1.4) width, 7.62 (.300) base, 28.85 MAX terminal width, 1.136 terminal barrier. Non-illuminated or Incandescent Lamp Display  Non-illuminated or Incandescent Lamp Display dimensions: 20.3 (.80) top, 15.49 (.610) offset, 25.15 (.990) height, 30.5 (1.20) width, 18.92 MAX terminal width, 1.745 terminal barrier.
AML33/35 SWITCHES PADDLE Neon Location Same as Rocker  Neon Location Same as Rocker dimensions: 25.15 (.990) top, 11.43 (.450) offset, 1.52 (.060) height, 36 (1.4) width, 7.62 (.300) base, 28.85 MAX terminal width, 1.136 terminal barrier. Neon Location Same as Rocker  Neon Location Same as Rocker dimensions: 20.3 (.80) top, 15.49 (.610) offset, 25.15 (.990) height, 30.5 (1.20) width, 18.92 MAX terminal width, 1.745 terminal barrier.	TERMINAL LOCATIONS PUSHBUTTON  Pushbutton terminal locations: 12.19 (.480) top, 1.02 (.040) offset, 5.33 (.210) height, 9.40 (.370) width, 0.51 (.020) TYP base, 4.78 (.188) TYP base. ROCKER AND PADDLE  Rocker and Paddle terminal locations: 8.38 (.330) top, 7.37 (.290) height, 9.40 (.370) width, 5.33 (.210) height, 7.62 (.300) TYP base.

Mounting Dimensions (For Reference Only)

TERMINAL LOCATIONS FOR AML20 SWITCHES


PUSHBUTTON SWITCHES

Solder or Quick-Connect

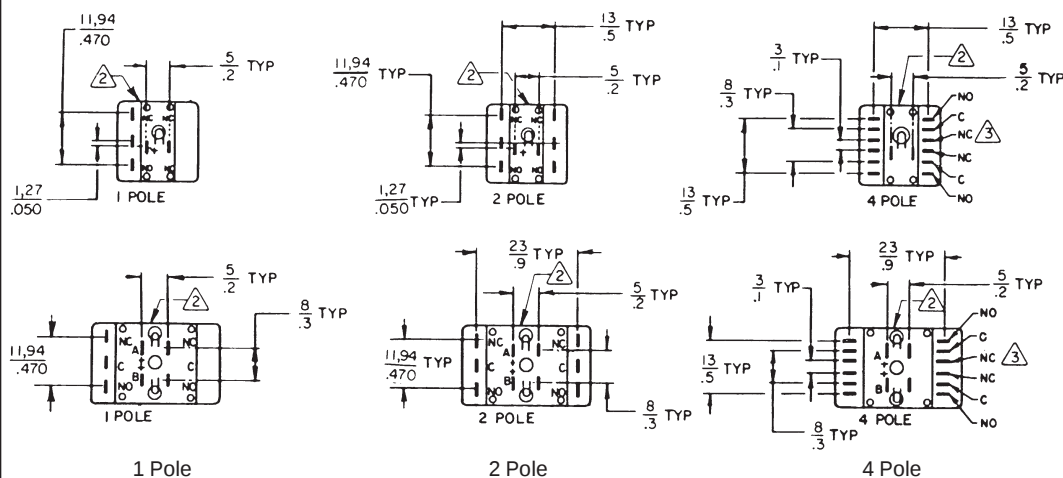


KEYLOCK SWITCHES

Solder or Quick-Connect




Printed Circuit




PUSHBUTTON SWITCHES

Printed Circuit

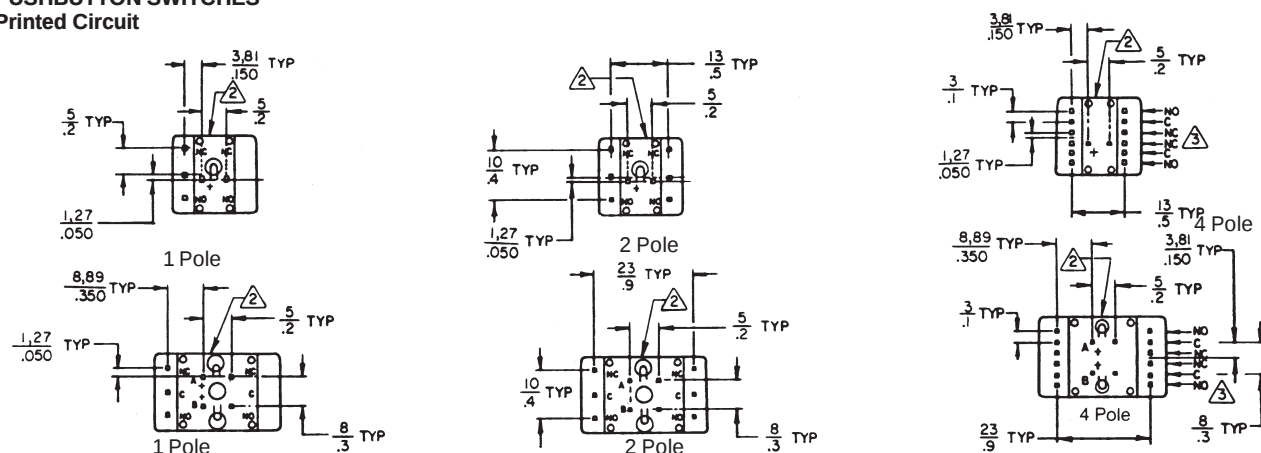


ILLUMINATED ROCKERS AND PADDLES

Solder or Quick-Connect

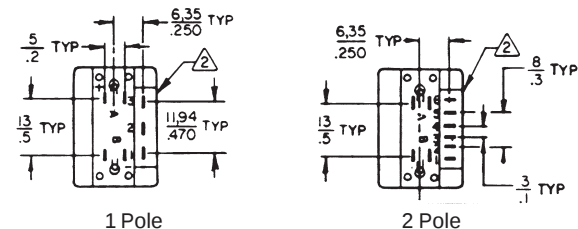


Printed Circuit

Printed Circuit

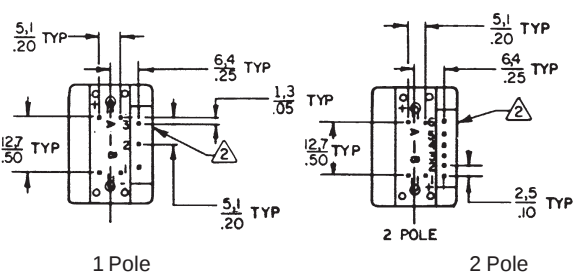

NON-ILLUMINATED ROCKERS AND PADDLES

Solder or Quick-Connect

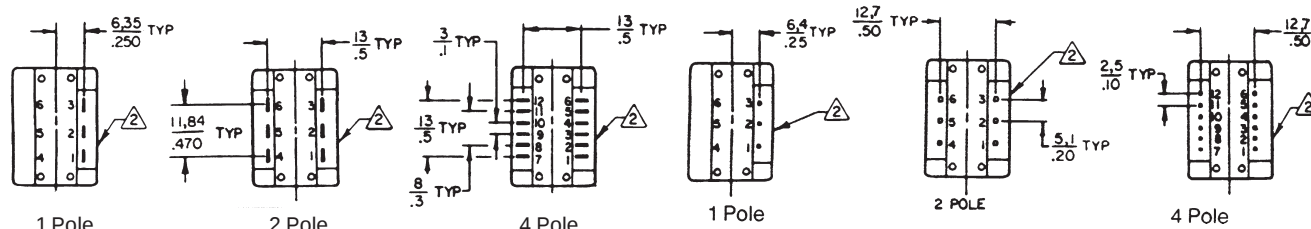


Manual Switches

Mounting Dimensions (For Reference Only)

AML Series

ANNUNCIATORS




AML45 SERIES

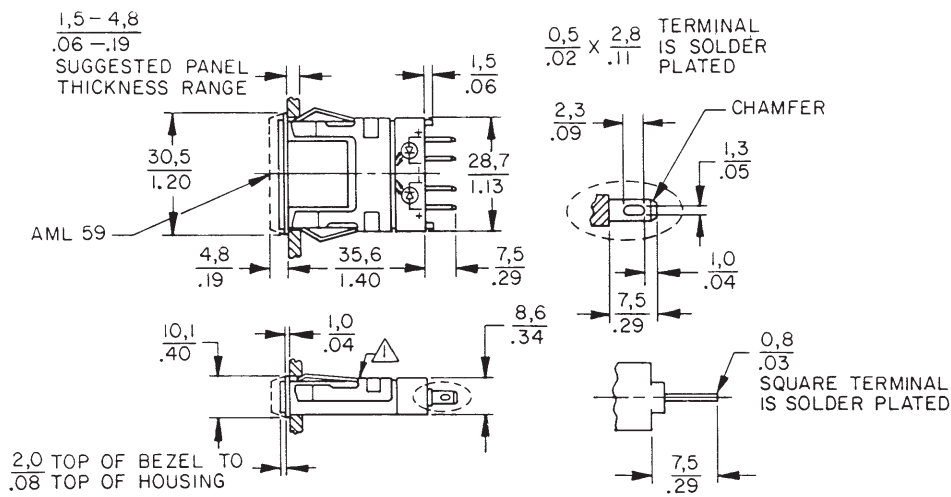

PANEL CUTOUT

PANEL CUTOUT FOR MOUNTING TWO ANNUNCIATORS IN ONE CUTOUT (USING ONE 30PAI-AML)

PANEL CUTOUT FOR AML 45 ABUTTING AML SWITCH (USING ONE 30PAI-AML)

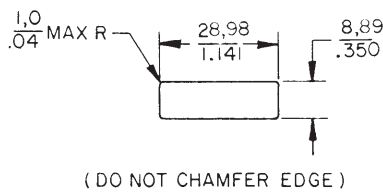

 Manufacturer's logo on this side of housing

Manuals

For panel punch manufacturer, see page 48.

Manual Switches

Mounting Dimensions (For Reference Only)

AML Series

MULTI-STATION FRONT-PANEL MOUNTING

Panel cutouts (See page 48 for panel punch manufacturer.)

Square Switches & Indicators	Rect. Switches & Indicators	Annunciator
(.8) (No. of units) — .045 * (20,3) (No. of units) — 1,14 *	(1.20) (No. of units) — .045 * (30,5) (No. of units) — 1,14 *	(.40) (No. of units) — .045 * (10,1) (No. of units) — 1,14 *

For each barrier, add .053/1,35

* Note: If barriers are used, do not subtract .045 in./1,14 mm from the panel cutout formula. (.045 in./1,14mm is the allowance for the width of the bezel.)

AML61 MULTI-STATION SUBPANEL MOUNTING

Panel cutouts for AML61


Mounting Bracket Orientation	Width	Length
A* in. mm	.810 20,57	(.810)(No. of units)
B in. mm	.810 20,57	(1.210)(No. of units)
C or D* in. mm	1.210 27,94	(.810)(No. of units)

* More than two cans with mounting brackets required for strips of more than 10 units.

AML61 MOUNTING CENTERS

Mounting Bracket Orientation		Mounting Centers/Number of Cans											
		1	2	3	4	5	6	7	8	9	10	11	12
"A" or "C"	in. mm	1.285 32,64	2.095 53,21	2.905 73,79	3.715 94,36	4.525 114,94	5.335 135,51	6.145 156,08	6.955 176,66	7.765 197,23	8.575 217,81	9.385 238,38	10.195 258,95
"B"	in. mm	1.685 42,80	2.895 73,53	4.105 104,27	5.315 135,00	6.525 165,74	7.735 196,48	8.945 227,20	10.155 257,94				
"D" or "E"	in. mm	on C _L on C _L	.807 20,50	1.614 41,00	2.421 61,49	3.228 81,99	4.035 102,49	4.842 122,99	5.649 143,48	6.456 163,98	7.263 184,48	8.070 204,98	8.877 225,48

Tolerance = ±.015

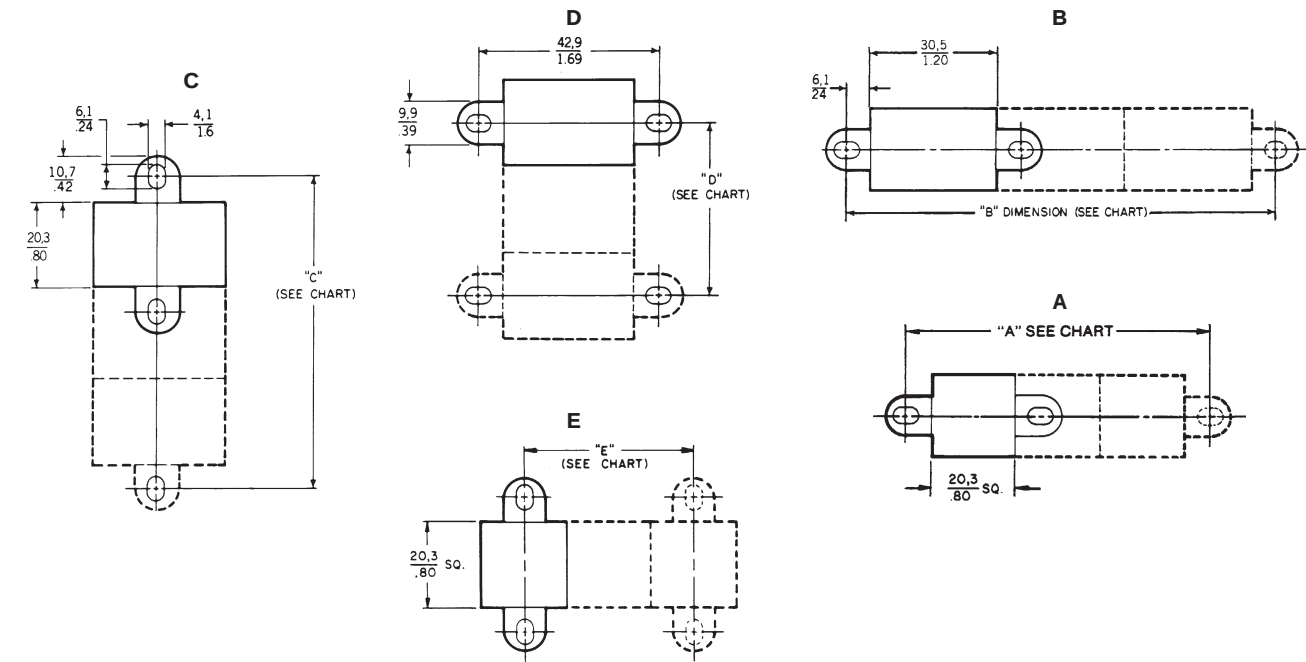


Manual Switches

Mounting Dimensions (For Reference Only)

AML Series

AML75 PANEL SEAL ACCESSORY

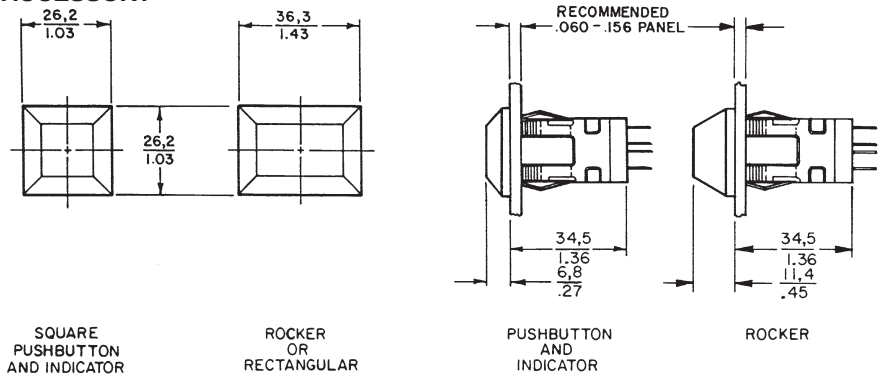


Panel cutouts

Multiple panel sealed units should not be mounted together in a single elongated slot, since this would create an unsealed space between each unit.



Side-by-side mounting can be achieved, per the center-to-center dimensions shown in the drawing. (Dotted lines indicate the seal bases which are abutting at front of panel.)

AML75 seals are not designed for use with the AML61 mounting system.

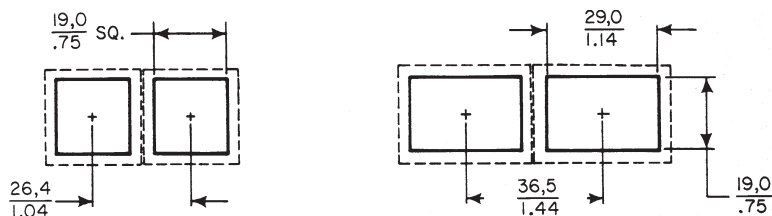


NOTE: Suggested cutout dimensions are based on an .125"/3.18 mm panel thickness. Individual preferences for inpanel fit may require measurement of assemblies before panels are cut.

AML76 SWITCH GUARD ACCESSORY

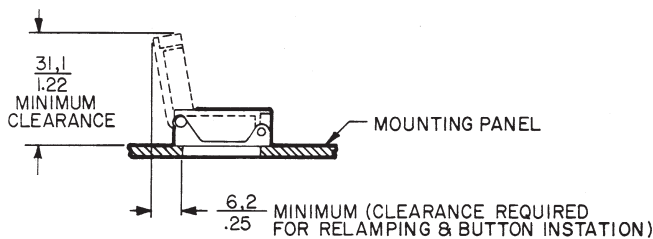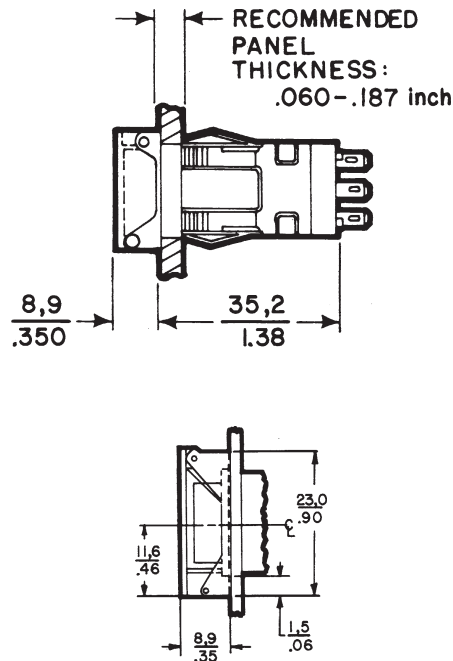

PANEL CUTOUTS

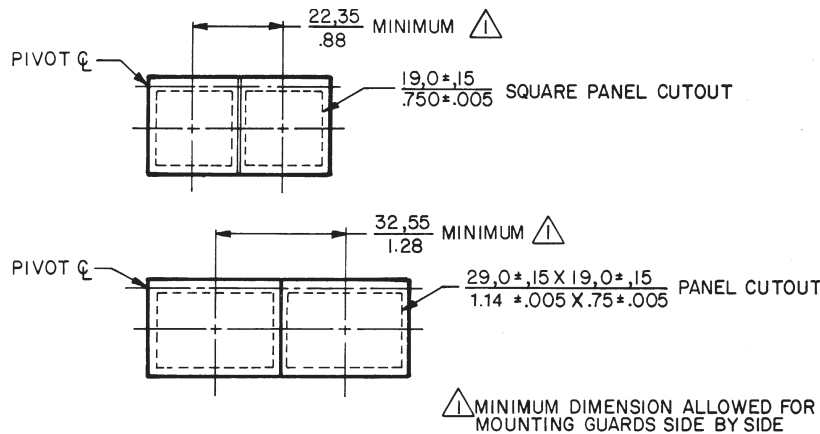

Manuals

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

[AML11BBA3EE](#) [AML11CBB2EE](#) [AML11CBB3EA](#) [AML11CBB3EE](#) [AML11CBE2EA](#) [AML11CBE2EE](#)
[AML11EBA2EE](#) [AML11EBA3EA](#) [AML11EBA3EE](#) [AML11FBA2EA-001](#) [AML11FBA3EA-001](#) [AML11FBA3EE](#)
[AML11FBB2EE](#) [AML11FBC2EA](#) [AML11FBC2EE](#) [AML11FBC3EA](#) [AML11FBE2EA](#) [AML11FBE2EE](#) [AML11FBE3EA](#)
[AML11FBE3EE](#) [AML11GBA2EE](#) [AML11GBB2EA](#) [AML11GBB2EE](#) [AML11GBB3EA](#) [AML11GBB3EE](#)
[AML11GBE2EA](#) [AML11GBE2EE](#) [AML11GBE3EA](#) [AML11GBE3EE](#) [AML11HBA2EE](#) [AML11HBA3EA](#) [AML11JBA2EE](#)
[AML11JBA3EE](#) [AML11JBB2EA](#) [AML11JBB3EA](#) [AML11JBE2EE](#) [AML11LBA2EA](#) [AML11LBA2EE](#) [AML11LBA3EA](#)
[AML11LBA3EE](#) [AML11LBE2EE](#) [AML11LBE3EA](#) [AML11MBB3EA](#) [AML11MBC3EE](#) [AML11MBE3EA](#) [AML11MBE3EE](#)
[AML12CBB2EE](#) [AML12CBC3EA](#) [AML12CBC8EA](#) [AML12CBD2EA](#) [AML12CBD2EE](#) [AML12CBD3EE](#)
[AML12CBE2EA](#) [AML12CBE3EA](#) [AML12CBF2EA](#) [AML12CBF2EE](#) [AML12CBF3EA](#) [AML12CBF3EE](#) [AML12CBH2EE](#)
[AML12CBJ2EA](#) [AML12CBJ3EA](#) [AML12CBJ3EE](#) [AML12CBL2EA](#) [AML12CBM2EA](#) [AML12CBM3EA](#)
[AML12CBR2EA](#) [AML12CBS2EE](#) [AML12CBS3EA](#) [AML12CBW2EA](#) [AML12CBW8EA](#) [AML12CBX2EA](#)
[AML12CBX2EE](#) [AML12CBX3EA](#) [AML12CBX3EE](#) [AML12HBC3EA](#) [AML12JBB2EA](#) [AML12JBB2EE](#) [AML12JBB3EE](#)
[AML12JBC2EA](#) [AML12JBC8EA](#) [AML12JBC8EE](#) [AML12JBF3EA](#) [AML12JBH2EA](#) [AML12JBH2EE](#) [AML12JBH3EA](#)
[AML12JBH3EE](#) [AML12JBR2EA](#) [AML12JBS2EA](#) [AML12JBS2EE](#) [AML12JBS8EA](#) [AML12JBS8EE](#) [AML12JBX2EE](#)
[AML12CBB3EA](#) [AML11BBA2EA](#) [AML11BBA2EE](#) [AML11BBA3EA](#) [AML11CBA2EE](#) [AML11CBA3EE](#) [AML11CBE3EA](#)
[AML11CBE3EE](#)