


GSD

1203-16-9

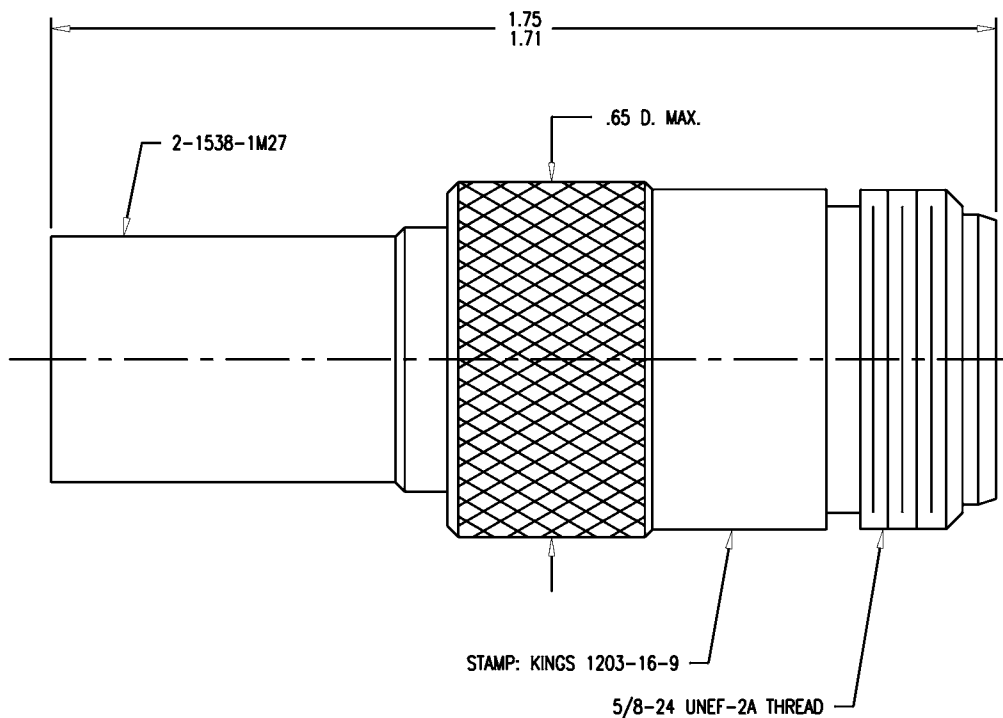

NOTES:

1. FOR USE WITH BOEING S280W503-5 & ADAMS RUSSELL FC38Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2213.
4. INTERFACE PER MIL-STD-348, FIG. 304-2.
6. CENTER CONTACT (1-534-85MA9) SUPPLIED UNASSEMBLED.
7. MARK PACKAGE: KINGS 1203-16-9
XX XX (DATE CODE)

8. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER PARTS: BRASS, ASTM-B16

9. FINISHES:

CENTER CONTACT: GOLD PLATE PER MIL-G-45204

ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)

10. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE: 50 OHMS

VOLTAGE RATING: 1000 VRMS

FREQUENCY RANGE: DC TO 11 GHz

REVISIONS

ISSUE		CHANGES	
0	ER JCA	34693 06/10/93	

JCA3952

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: BOEING

JACK, N

DRAWN	JCA	DATE	06/10/93
DESIGN	JT	DATE	06/11/93
APPR.	VLS	DATE	06/15/93

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

1203-16-9

GSD