



SAW Components

Data Sheet B3655





SAW Components

B3655

Low-Loss Filter

248,6 MHz

Data Sheet


Ceramic package **DCC18**

Features

- Low-loss IF filter for DCS base station
- Rx path
- Temperature stable
- Unbalanced or balanced operation
- Ceramic SMD package

Terminals


- Gold plated

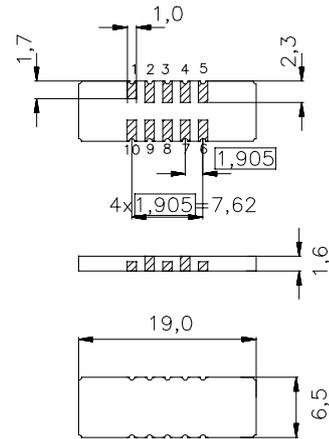

Dim. in mm, aprox. weight 0,7 g

Pin configuration

- | | |
|------------|---------------|
| 1 | Input |
| 6 | Output |
| 10 | Input ground |
| 5 | Output ground |
| 3, 8 | Ground |
| 2, 4, 7, 9 | Case – ground |



Type	Ordering code	Marking and Package according to	Packing according to
B3655	B39241-B3655-U210	C61157-A7-A54	F61074-V8069-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 25/+ 75	°C
Storage temperature range	T_{stg}	- 40/+ 85	°C
DC voltage	V_{DC}	0	V
Source power	P_s	10	dBm


SAW Components
B3655
Low-Loss Filter
248,6 MHz
Data Sheet
Characteristics

Operating temperature:

$$T_A = -5 - 75 \text{ }^\circ\text{C}$$

Terminating source impedance:

$$Z_S = 50 \text{ } \Omega \text{ and matching network}$$

Terminating load impedance:

$$Z_L = 50 \text{ } \Omega \text{ and matching network}$$


			min.	typ.	max.	
Nominal frequency	f_N	—	—	248,6	—	MHz
Minimum insertion attenuation (including matching network)	α_{\min}	—	—	8,3	9,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	$f_N \pm 95 \text{ kHz}$	—	—	0,4	1,0	dB
	$f_N \pm 120 \text{ kHz}$	—	—	0,6	1,5	dB
Passband width	$\alpha_{\text{rel}} \leq 3,0 \text{ dB}$	$B_{3,0\text{dB}}$	240	410	—	kHz
Absolute group delay (at f_N)	τ	—	—	2,3	3,0	μs
Group delay ripple (p-p)	$\Delta\tau$					
	$f_N \pm 95 \text{ kHz}$	—	—	0,3	0,7	μs
	$f_N \pm 120 \text{ kHz}$	—	—	0,4	1,0	μs
Relative attenuation (relative to α_{\min})	α_{rel}					
	$f_N \pm 0,33 \text{ MHz} \dots f_N \pm 0,60 \text{ MHz}$	11	18,5	—	—	dB
	$f_N \pm 0,60 \text{ MHz} \dots f_N \pm 0,80 \text{ MHz}$	22	26	—	—	dB
	$f_N \pm 0,80 \text{ MHz} \dots f_N \pm 3,00 \text{ MHz}$	30	36	—	—	dB
	$f_N - 3,00 \text{ MHz} \dots f_N - 105 \text{ MHz}$	48	51	—	—	dB
	$f_N - 105 \text{ MHz} \dots f_N - 120 \text{ MHz}$	51	65	—	—	dB
	$f_N + 3,00 \text{ MHz} \dots f_N + 13 \text{ MHz}$	48	51	—	—	dB
	$f_N + 13 \text{ MHz} \dots f_N + 30 \text{ MHz}$	43	46	—	—	dB
	$f_N + 30 \text{ MHz} \dots f_N \pm 105 \text{ MHz}$	48	51	—	—	dB
	$f_N + 105 \text{ MHz} \dots f_N + 120 \text{ MHz}$	51	56	—	—	dB
Temperature coefficient of frequency ¹⁾	TC_f	—	—	- 0,036	—	ppm/K ²
Turnover temperature	T_0	—	—	30	—	$^\circ\text{C}$

¹⁾ Temperature dependance of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



Data Sheet

Matching network

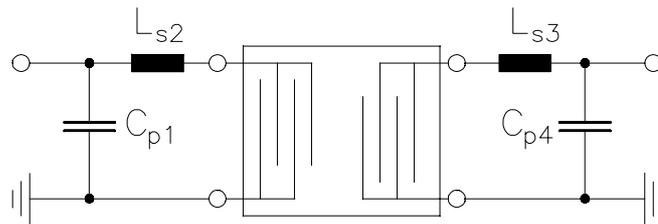

$C_{p1} = 22 \text{ pF}$

$L_{s2} = 22 \text{ nH}$


$L_{s3} = 22 \text{ nH}$

$C_{p4} = 22 \text{ pF}$




Data Sheet

Normalized frequency response

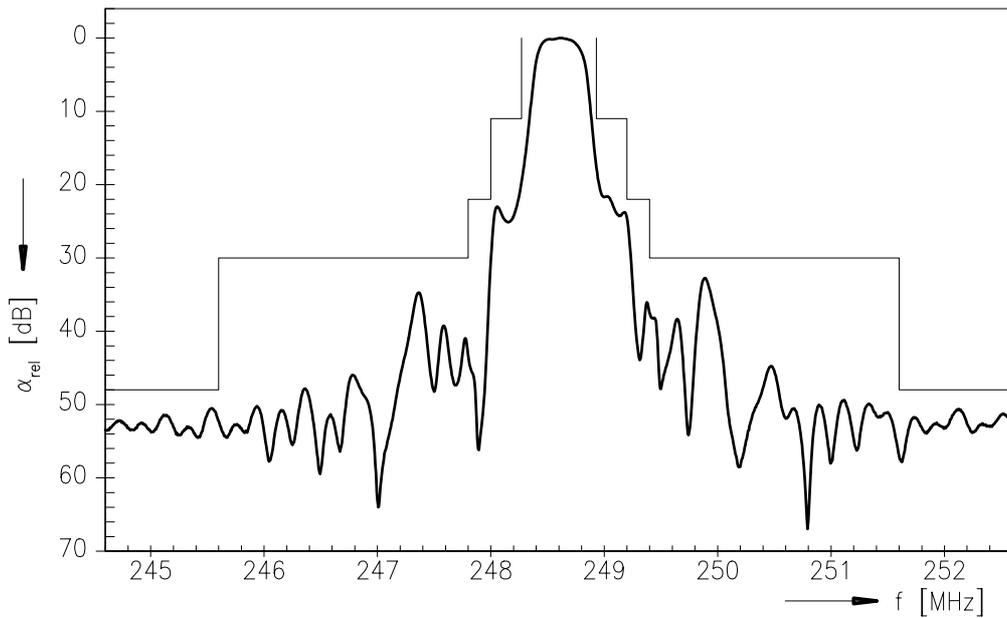

Normalized frequency response (pass band)

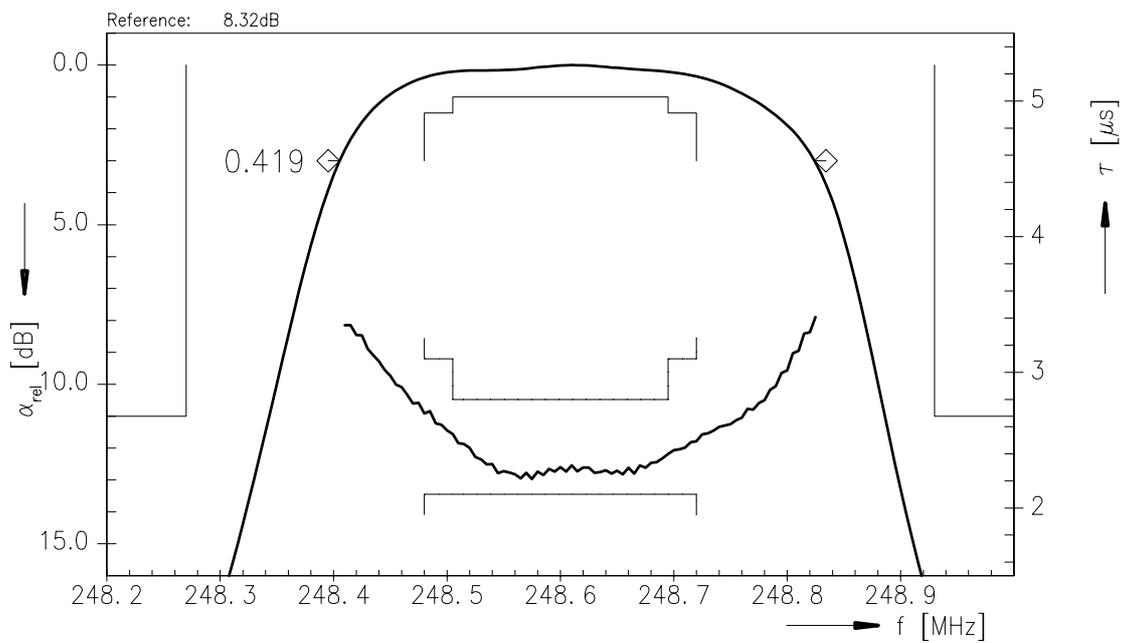



SAW Components

B3655

Low-Loss Filter

248,6 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC IS
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.