



SAW Components

Data Sheet B3677

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components	B3677
Low-Loss Filter	374,0 MHz

Data Sheet


Ceramic package QCC8C

Features

- Low-loss IF filter
- Ceramic SMD package
- Balanced or unbalanced operation

Terminals


- Gold plated

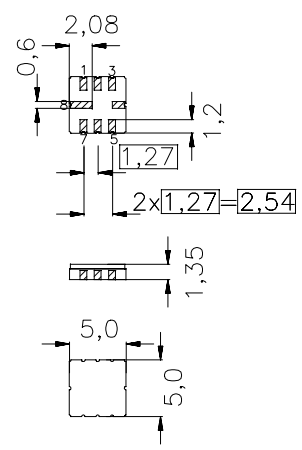

typ. Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 3 Input
- 2 Input or input ground
- 7 Output
- 6 Output or output ground
- 4, 8 Case ground
- 1, 5 To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B3677	B39371-B3677-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-45 / +85	°C	
Storage temperature range	T_{stg}	-45 / +85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	



SAW Components

B3677

Low-Loss Filter

374,0 MHz

Data Sheet

Characteristics

Operating temperature:

$T_A = -10 \dots 80 \text{ }^\circ\text{C}$

Terminating source impedance:

$Z_S = 50 \text{ } \Omega$ unbalanced and matching network

Terminating load impedance:

$Z_L = 50 \text{ } \Omega$ unbalanced and matching network

			min.	typ.	max.	
Nominal frequency	f_N		—	374,00	—	MHz
Minimum insertion attenuation (including matching network)	$\alpha_{\min}$		—	8,5	10,0	dB
Bandwidth	$\alpha_{\text{rel}} \leq 3 \text{ dB}$	$B_{3\text{dB}}$	17	22	—	MHz
Amplitude ripple (p-p)	$f_N \pm 7 \text{ MHz}$	$\Delta\alpha$	—	0,5	1	dB
Group delay ripple (p-p)	$f_N \pm 7 \text{ MHz}$	$\Delta\tau$	—	40	100	ns
Triple transit suppression			30	40	—	dB
Relative attenuation (relative to $\alpha_{\min}$)		α_{rel}				
$f_N - 16,5 \text{ MHz} \dots f_N - 22 \text{ MHz}$			30	42	—	dB
$f_N - 22 \text{ MHz} \dots f_N - 33 \text{ MHz}$			40	45	—	dB
$f_N - 33 \text{ MHz} \dots f_N - 150 \text{ MHz}$			48	52	—	dB
$f_N + 16,5 \text{ MHz} \dots f_N + 18 \text{ MHz}$			20	38	—	dB
$f_N + 18 \text{ MHz} \dots f_N + 22 \text{ MHz}$			30	42	—	dB
$f_N + 22 \text{ MHz} \dots f_N + 48 \text{ MHz}$			38	44	—	dB
$f_N + 48 \text{ MHz} \dots f_N + 80 \text{ MHz}$			40	45	—	dB
$f_N + 80 \text{ MHz} \dots f_N + 150 \text{ MHz}$			48	55	—	dB
Adjacent channel suppression						
average attenuation relative to $\alpha_{\min}$		α_{rel}				
$f_N - 16,5 \dots f_N - 33,5 \text{ MHz}$			40	64	—	dB
$f_N + 16,5 \dots f_N + 33,5 \text{ MHz}$			40	56	—	dB
Temperature coefficient of frequency	TC_f		—	- 87	—	ppm/K



SAW Components

B3677


Low-Loss Filter

374,0 MHz

Data Sheet

Matching network (element values may depend on pcb layout)

50 Ω unbalanced:

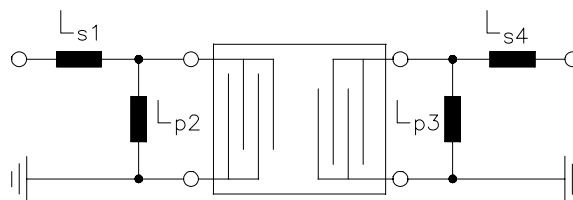


$$L_{s1} = 27 \text{ nH}$$

$$L_{p2} = 47 \text{ nH}$$

$$L_{p3} = 47 \text{ nH}$$

$$L_{s4} = 27 \text{ nH}$$

250 Ω balanced:

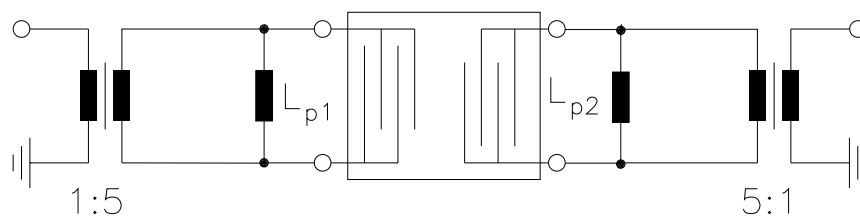

$$L_{p1} = 24 \text{ nH} \quad (\text{e.g. Coilcraft 0603CS-24NX_BC})$$

$$L_{p2} = 24 \text{ nH}$$



SAW Components


B3677

Low-Loss Filter

374,0 MHz

Data Sheet

200 Ω balanced:

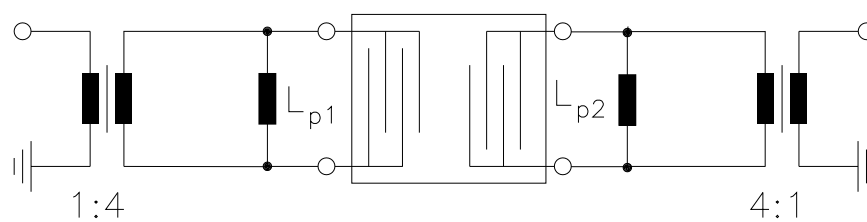

$$L_{p1} = 27 \text{ nH}$$

$$L_{p2} = 22 \text{ nH}$$



SAW Components


B3677

Low-Loss Filter


374,0 MHz

Data Sheet

Transfer function:

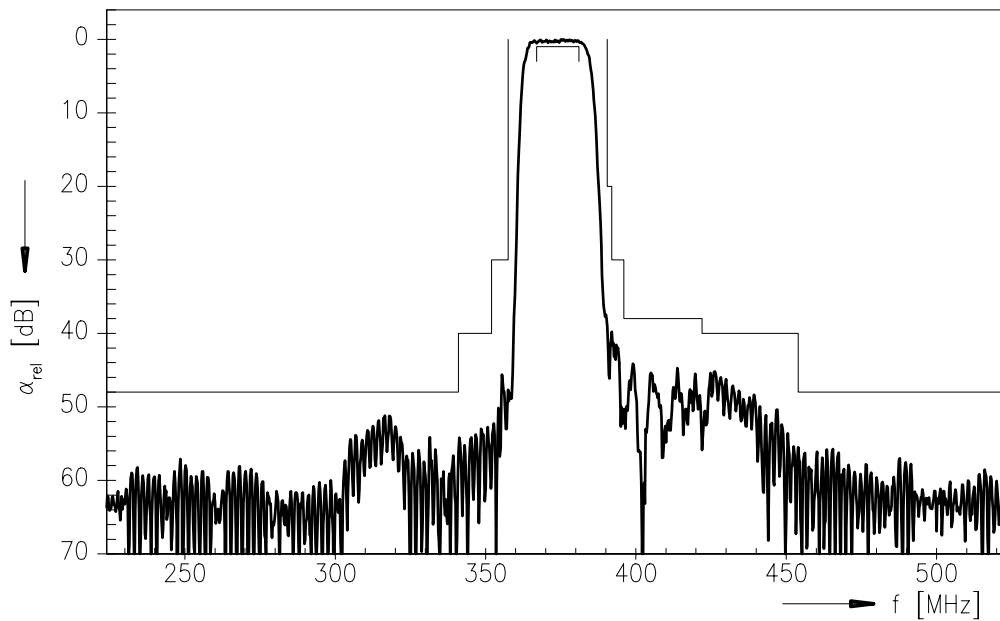

Transfer function (pass band):

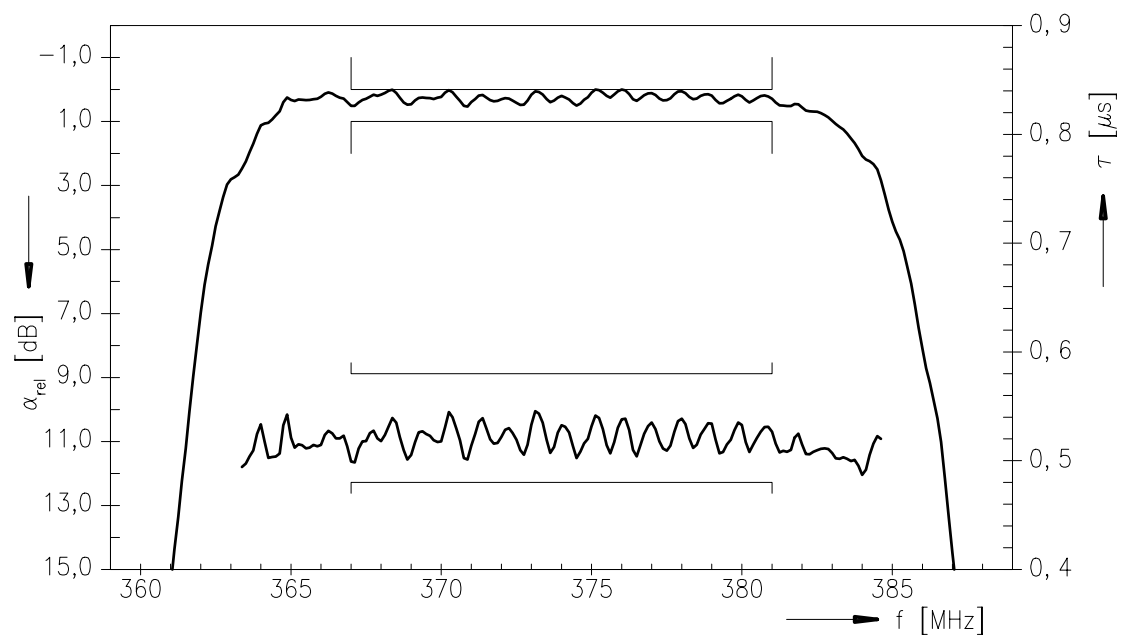



SAW Components	B3677
Low-Loss Filter	374,0 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E NK
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.