



SAW Components

Data Sheet B3826

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components

B3826

Low-Loss Filter

570,00 MHz

Data Sheet


Features

- IF low-loss filter for base stations
- Channel selection in W-CDMA systems
- Balanced and unbalanced operation possible
- 3,84 MHz usable bandwidth
- Ceramic SMD package

Terminals

- Gold plated


Ceramic package **QCC12C**

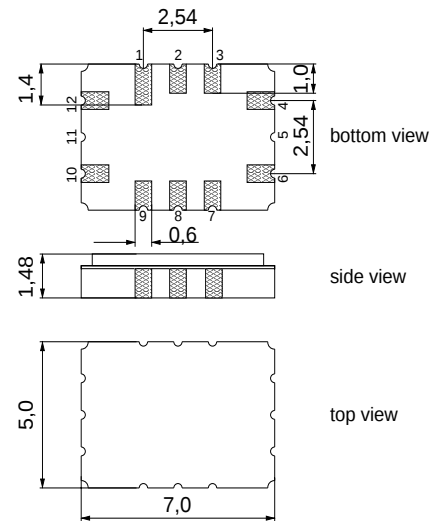

Dimensions in mm, approx. weight 0,2 g

Pin configuration

- | | |
|------------|----------------------------------|
| 10 | Input |
| 12 | Input ground or balanced input |
| 4 | Output |
| 6 | Output ground or balanced output |
| 1, 2, 7, 8 | to be grounded |
| 3, 9 | Case ground |

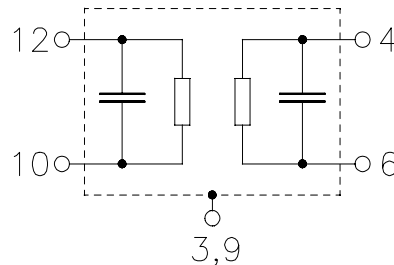

Type	Ordering code	Marking and Package according to	Packing according to
B3826	B39571-B3826-H310	C61157-A7-A95	F61074-V8170-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40 / +85	°C	
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_{s}	10	dBm	



SAW Components

B3826

Low-Loss Filter

570,00 MHz

Data Sheet

Characteristics (unbalanced operation)

Operating temperature range: $T = -10 \dots 85 \text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 440 \text{ } \Omega \parallel 11 \text{ nH}$
Terminating load impedance: $Z_L = 237 \text{ } \Omega \parallel 9 \text{ nH}$

		min.	typ.	max.	
Nominal frequency	f_N	—	570,0	—	MHz
Minimum insertion attenuation (including matching network ¹⁾)	$\alpha_{\min}$	10,0	11,8	12,5	dB
Pass bandwidth	$B_{3,0\text{dB}}$				
$\alpha_{\text{rel}} \leq 3,0 \text{ dB}$		4,6	4,8	5,0	MHz
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N \pm 1,92 \text{ MHz}$		0,1	0,8	1,5	dB
Absolute Group delay	τ				
@ f_N		550	620	690	ns
Group delay ripple (p-p)	$\Delta\tau$				
$f_N \pm 1,92 \text{ MHz}$		50	150	300	ns
Adjacent channel selectivity	ACS	21	29	39	dB
Minimum relative attenuation (relative to $\alpha_{\min}$)	α_{rel}				
$f_N \pm 3,5 \text{ MHz} \dots f_N \pm 5,0 \text{ MHz}$		20	25	40	dB
$f_N - 5,0 \text{ MHz} \dots f_N - 8,0 \text{ MHz}$		45	47	55	dB
$f_N - 8,0 \text{ MHz} \dots f_N - 20,0 \text{ MHz}$		48	50	55	dB
$f_N + 5,0 \text{ MHz} \dots f_N + 7,0 \text{ MHz}$		45	50	55	dB
$f_N + 7,0 \text{ MHz} \dots f_N + 9,0 \text{ MHz}$		44	45	55	dB
$f_N + 9,0 \text{ MHz} \dots f_N + 10,0 \text{ MHz}$		46	47	55	dB
$f_N + 10,0 \text{ MHz} \dots f_N + 20,0 \text{ MHz}$		48	50	55	dB
Intermodulation	IM3				
f1 = 569 MHz, input power +1dBm f2 = 571 MHz, input power +1dBm					
@ $f_N + 3 \text{ MHz}$		-130	-105	-95	dBm
@ $f_N - 3 \text{ MHz}$		-130	-104	-94	dBm



SAW Components	B3826
Low-Loss Filter	570,00 MHz

Data Sheet


		min.	typ.	max.	
Impedance at f_N (without matching)					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	244 $\parallel$ 8	—	$\Omega \parallel \text{pF}$
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	119 $\parallel$ 12	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency ²⁾	TC_f	—	– 0,036	—	ppm/K ²
Turnover temperature	T_0	—	30	—	°C

1) Matching inductor Q=40

2) Temperature dependance of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$

**SAW Components****B3826****Low-Loss Filter****570,00 MHz****Data Sheet****Matching network**

(Element values depend upon PCB layout)

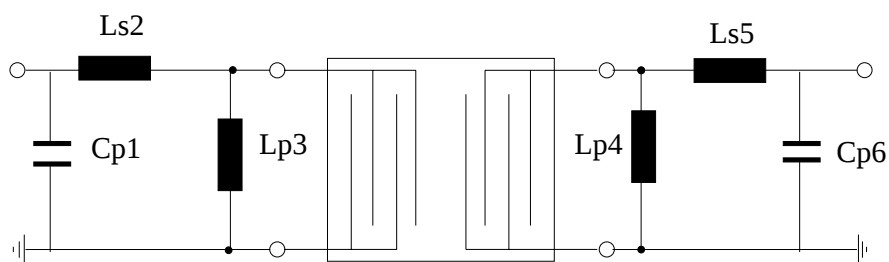

$$C_{p1} = 3,3 \text{ pF}$$

$$L_{s2} = 33 \text{ nH}$$

$$L_{p3} = 18 \text{ nH}$$

$$L_{p4} = 12 \text{ nH}$$

$$L_{s5} = 22 \text{ nH}$$

$$C_{p6} = 2,7 \text{ pF}$$



SAW Components


B3826

Low-Loss Filter


570,00 MHz

Data Sheet

Normalized frequency response

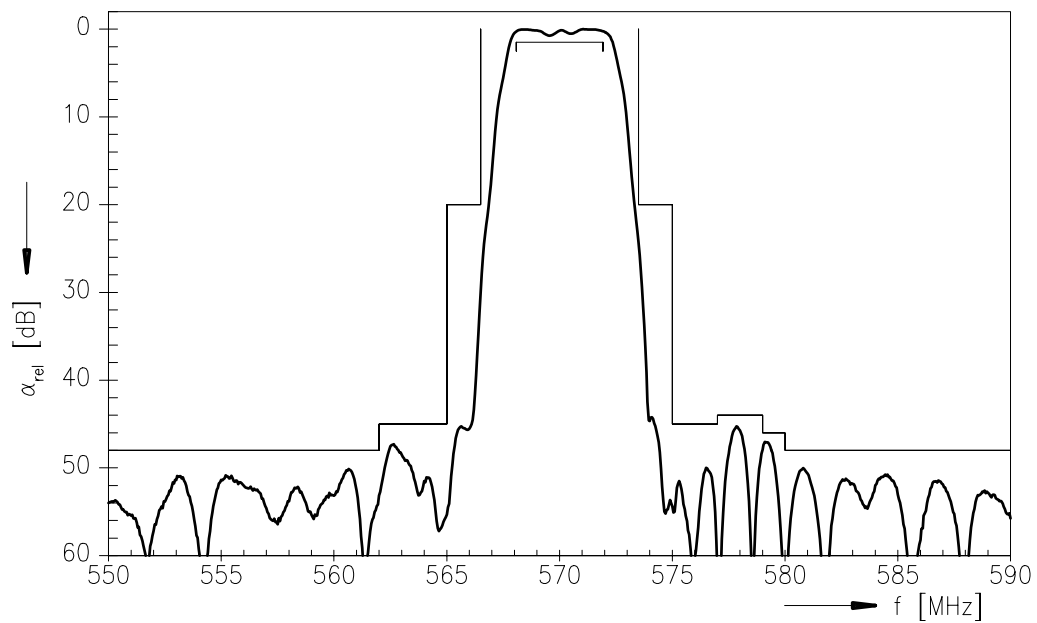

Normalized frequency response (pass band)

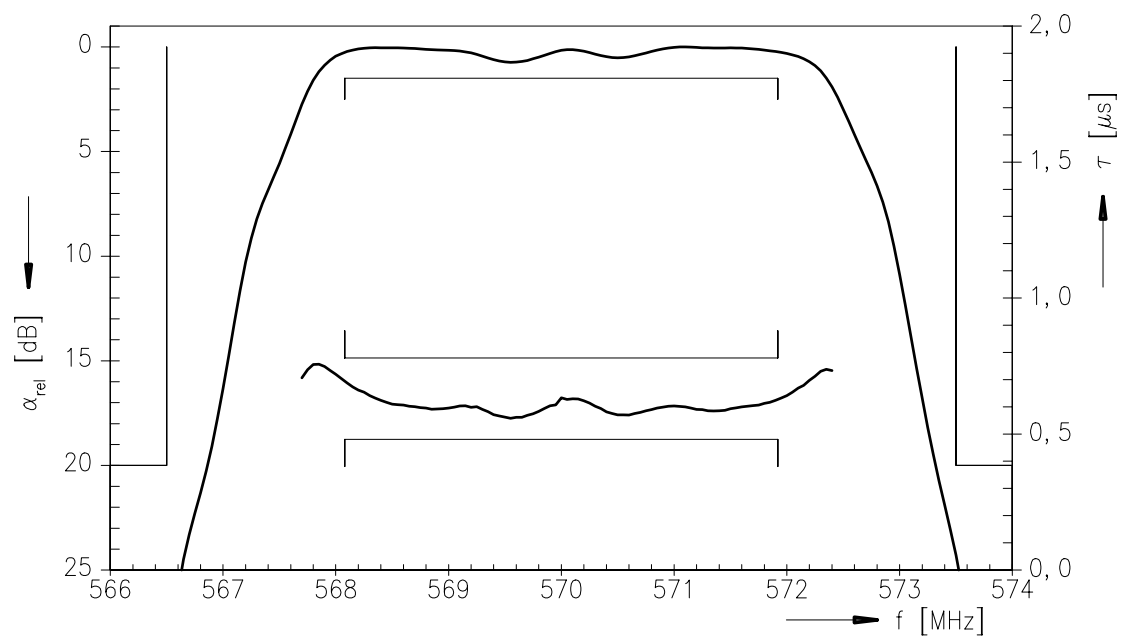



SAW Components	B3826
Low-Loss Filter	570,00 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC IS
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2003. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.