



SAW Components

Data Sheet B3821





SAW Components

B3821

Low-Loss Filter

860,5 MHz

Data Sheet


Ceramic package QCC8B

Features

- Low-loss filter for TETRA
- Usable bandwidth 19 MHz
- No matching required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)
- Hermetically sealed ceramic package

Terminals


- Gold-plated

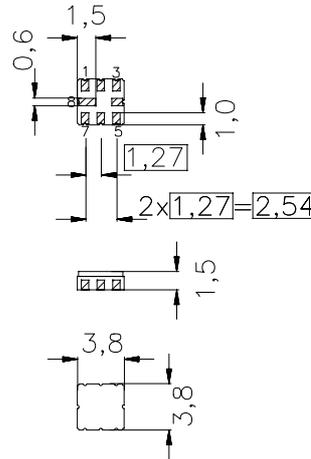

typ. Dimensions in mm, approx. weight 0,07 g

Pin configuration

- 2 Input
- 6 Output
- 1, 3, 4, 5, 7, 8 To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B3821	B39861-B3821-Z810	C61157-A7-A46	F61074-V8037-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-40 / +85	°C	
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	0	V	
Input power max.	P_{IN}	15,0	dBm	source impedance 50 Ω CW for min. 10 000 h, 85 °C


SAW Components
B3821
Low-Loss Filter
860,5 MHz
Data Sheet
Characteristics

Operating temperature range: $T_A = +15 \dots +35 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	860,5	—	MHz
Maximum insertion attenuation 851,0 MHz ... 870,0 MHz	α_{\max}	—	2,2	2,5	dB
Amplitude ripple (p-p) 851,0 MHz ... 870,0 MHz	$\Delta\alpha$	—	0,45	0,7	dB
Input and output return loss 851,0 MHz ... 870,0 MHz		12	16	—	dB
Absolute attenuation	α_{abs}				
0,1 MHz ... 797,0 MHz		45	55	—	dB
797,0 MHz ... 813,0 MHz		40	50	—	dB
813,0 MHz ... 829,0 MHz		35	43	—	dB
829,0 MHz ... 833,0 MHz		25	40	—	dB
904,0 MHz ... 959,0 MHz		30	40	—	dB
959,0 MHz ... 1089,0 MHz		50	60	—	dB
1089,0 MHz ... 2000,0 MHz		30	42	—	dB
Temperature coefficient of frequency	TC_f	—	-36	—	ppm/K



SAW Components

B3821

Low-Loss Filter

860,5 MHz

Data Sheet

Characteristics

Operating temperature range: $T_A = -30 \dots +70 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	860,5	—	MHz
Maximum insertion attenuation 851,0 MHz ... 870,0 MHz	α_{\max}	—	2,3	2,7	dB
Amplitude ripple (p-p) 851,0 MHz ... 870,0 MHz	$\Delta\alpha$	—	0,55	0,8	dB
Input and output return loss 851,0 MHz ... 870,0 MHz		12	16	—	dB
Absolute attenuation	α_{abs}				
0,1 MHz ... 797,0 MHz		45	55	—	dB
797,0 MHz ... 813,0 MHz		40	50	—	dB
813,0 MHz ... 829,0 MHz		35	43	—	dB
829,0 MHz ... 833,0 MHz		19	40	—	dB
904,0 MHz ... 959,0 MHz		30	40	—	dB
959,0 MHz ... 1089,0 MHz		50	60	—	dB
1089,0 MHz ... 2000,0 MHz		30	42	—	dB
Temperature coefficient of frequency	TC_f	—	- 36	—	ppm/K



SAW Components


B3821

Low-Loss Filter


860,5 MHz

Data Sheet

Transfer function (+15 °C ... +35 °C)

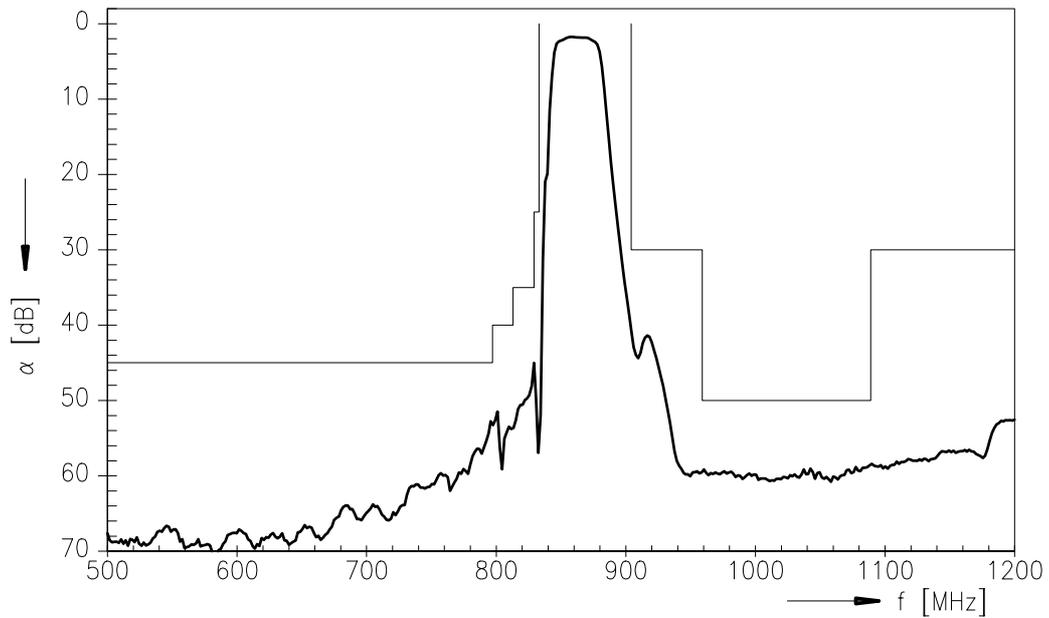

Transfer function (pass band; +15 °C ... +35 °C)

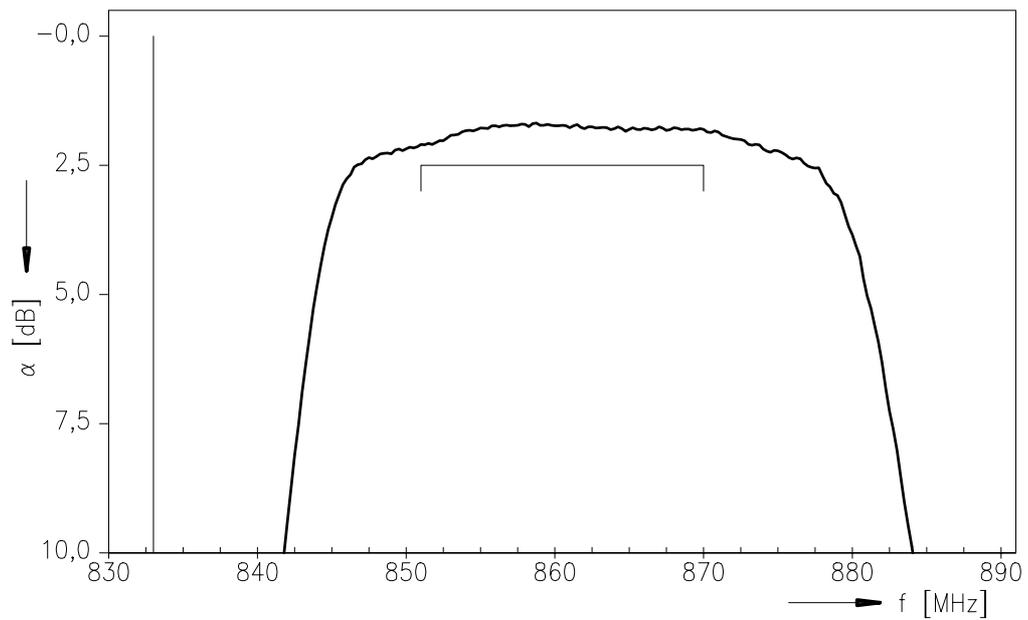



SAW Components

B3821

Low-Loss Filter

860,5 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2001. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.