



Features

- Duplex SC Single Mode Transceiver
- Industry Standard 1x9 Footprint
- Intermediate reach SONET OC-3 SDH STM-1 Compliant
- Single +5V/3.3V Power Supply
- PECL/LVPECL Differential Inputs and Outputs
- PECL/LVPECL Signal Detection Output
- Wave Solderable and Aqueous Washable
- LED Multisourced 1x9 Transceiver Interchangeable
- Class 1 Laser Int. Safety Standard IEC 825 compliant
- Uncooled laser diode with MQW structure
- Complies with Telcordia (Bellcore) GR-468-CORE
- ATM 155 Mbps links
- SONET/SDH Equipment Interconnect application
- CWDM
- RoHS compliance available

Table 1 – Absolute Maximum Rating

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Supply Voltage	V _{cc}	0	-	6	V	
Power Supply Voltage	V _{cc}	0	-	3.6	V	
Output Current	I _{out}	-	-	30	mA	
Soldering Temperature	-	-	-	260	°C	1
Storage Temperature	T _{stg}	-40	-	85	°C	

Note 1: 10 seconds on leads only

Table 2 – Recommended Operating Condition

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Supply Voltage	V _{cc}	4.75	5	5.25	V	
Power Supply Voltage	V _{cc}	3.1	3.3	3.5	V	
Operating Temperature (Case)	T _{opr}	0	-	70	°C	2
Data Rate	DR	-	155	-	Mbps	

Note 2: Please refer to ordering information

Table 3 – Transmitter Specifications (Optical)

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Optical Transmit Power	P_o	-3	-	+2	dBm	
Output Center Wavelength	λ	$\lambda n-5.5$	Δn	$\Delta n+7.5$	nm	3
Side Mode Suppression Ratio	Sr	30	35	-	dB	4
Output Spectrum Width	$\Delta \lambda$	-	-	1	nm	5
Extinction Ratio	ER	8.2	-	-	dB	
Output Eye		Compliant with ITU-T recommendation G.957				
Optical Rise/Fall Time	t_r / t_f	-	-	2	ns	6
Relative Intensity Noise	RIN	-	-	-116	dB/Hz	
Total Jitter	T_J	-	-	1.2	ns	

Note 3: $\lambda n=1xx0$ nm

Note 4: CW, $P_o=5mW$

Note 5: -20 dB width

Note 6: 10% to 90% Values

Table 4 – Transmitter Specifications (Electrical)

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Supply Current	I_{CC}	-	-	180	mA	7
Data Input Current-Low	I_{IL}	-350	-	-	μA	
Data Input Current-High	I_{IH}	-	-	350	μA	
Differential Input Voltage	$V_{IH}-V_{IL}$	300	-	-	mV	
Data Input Voltage-Low	$V_{IL}-V_{CC}$	-2.0	-	-1.58	V	8
Data Input Voltage-High	$V_{IH}-V_{CC}$	-1.1	-	-0.74	V	

Note 17: Maximum current is specified at $V_{CC} = \text{Maximum}$ @ maximum temperature

Note 18: These inputs are compatible with 10K, 10KH and 100K ECL and PECL inputs

Table 5 – Receiver Specifications (Optical)

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Sensitivity	-	-	-	-37	dBm	9
Maximum Input Power	P_{in}	0	-	-	dBm	
Signal Detect-Asserted	P_a	-	-	-37	dBm	10
Signal Detect-Deasserted	P_d	-47	-	-	dBm	11
Signal Detect-Hysteresis	-	1.0	-	4.0	dB	
Wavelength of Operation		1100	-	1600	nm	

Note 9: Measured with $2^{23}-1$ PRBS with 72 ones and 72 zeros.

Note 10: Measured on transition: low to high.

Note 11: Measured on transition: high to low.

Table 6 – Receiver Specifications (Electrical)

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Supply Current	I_{CC}	-	-	100	mA	12
Data Output Voltage-Low	$V_{OL}-V_{CC}$	-2	-	-1.58	V	13
Data Output Voltage-High	$V_{OH}-V_{CC}$	-1.1	-	-0.74	V	
Signal Detect Output Voltage-Low	$V_{SDL}-V_{CC}$	-2	-	-1.58	V	
Signal Detect Output Voltage-High	$V_{SDH}-V_{CC}$	-1.1	-	-0.74	V	

Note 12: The current excludes the output load current

Note 13: These outputs are compatible with 10K, 10KH and 100KECL and LVPECL outputs.

Connection Diagram


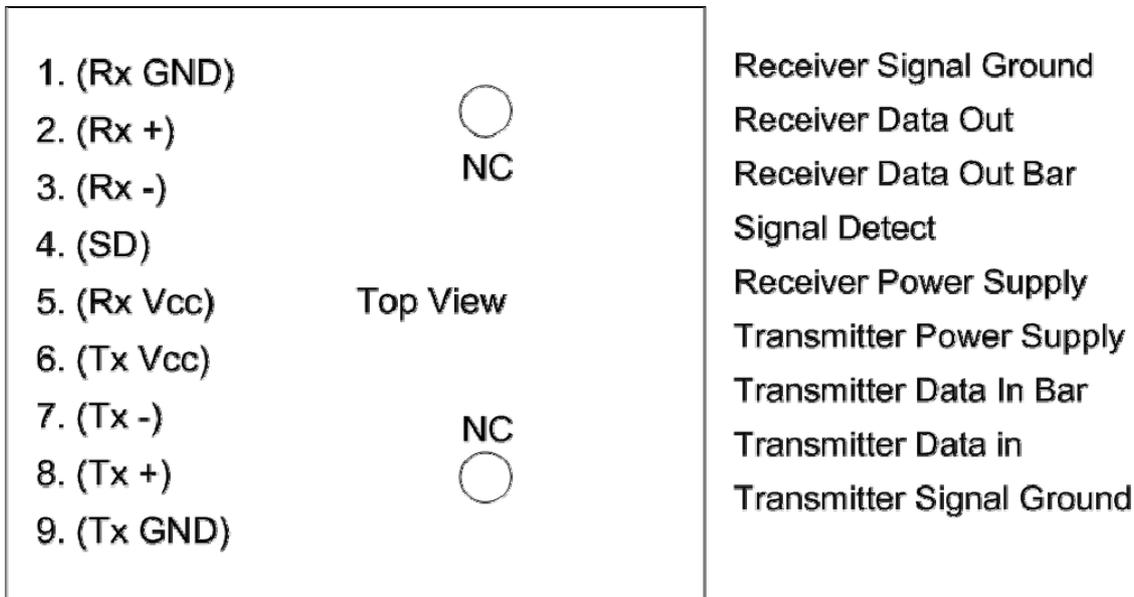


Table 7 – Pin Definitions

Pin	Unit	Notes
1	RxGND	Directly connect this pin to the receiver ground plane
2	RD+	See recommended circuit schematic
3	RD-	See recommended circuit schematic
4	SD	Active high on this indicates a received optical section
5	RxV _{CC}	DC power for the receiver section
6	TxV _{CC}	DC power for the transmitter section
7	TD-	See recommended circuit schematic
8	TD+	See recommended circuit schematic
9	TxGND	Directly connect this pin to the transmitter ground plane

Recommended Circuit Schematic

C-1xx-155-TDFB(3)-SSC6(D/E)

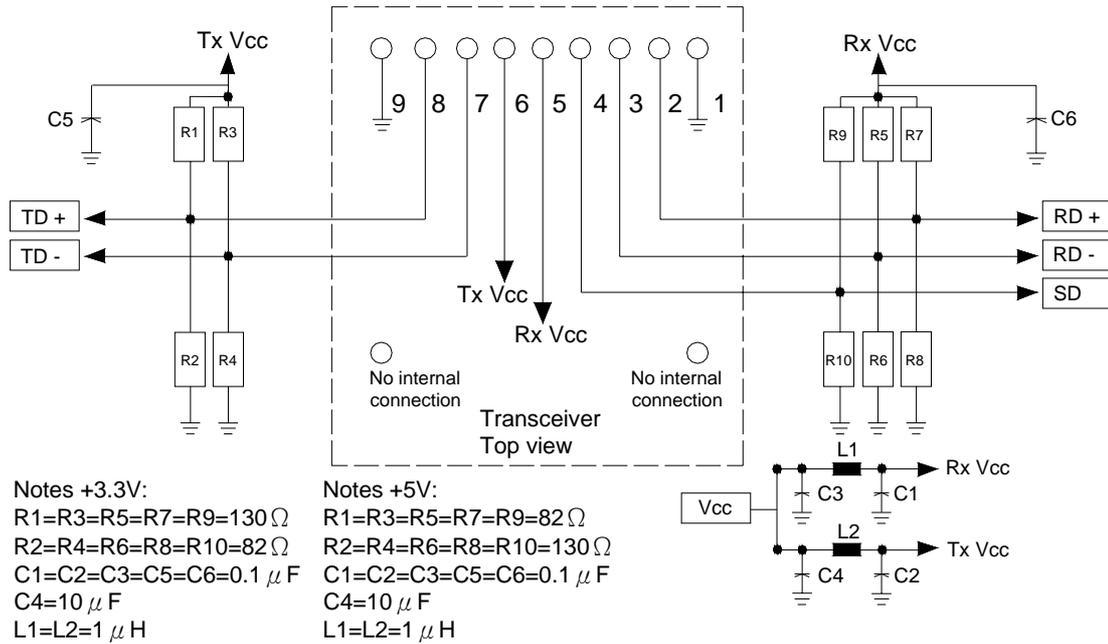


The split-loaded terminations for ECL signals need to be located at the input of devices receiving those ECL signals. The power supply filtering is required for good EMI performance. Use short tracks from the inductor L1/L2 to the module Rx Vcc. / Tx Vcc.

A GND plane under the module is required for good EMI and sensitivity performance.

Package Diagram (10.4 mm SC transceiver assembly)

C-1xx-155-TDFB(3)-SSC6

Units: mm

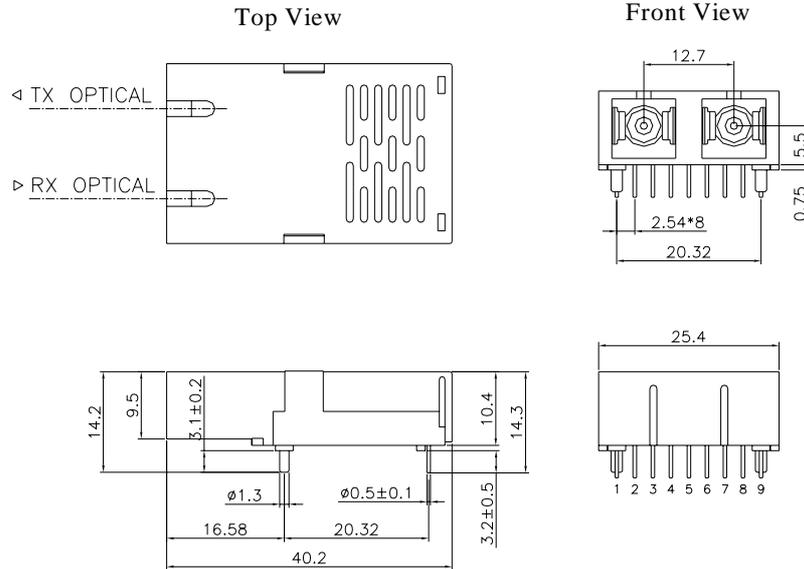


Blank: Black case

Package Diagram (9.8 mm SC transceiver assembly)

C-1xx-155-TDFB(3)-SSC6D(E)

Units: mm

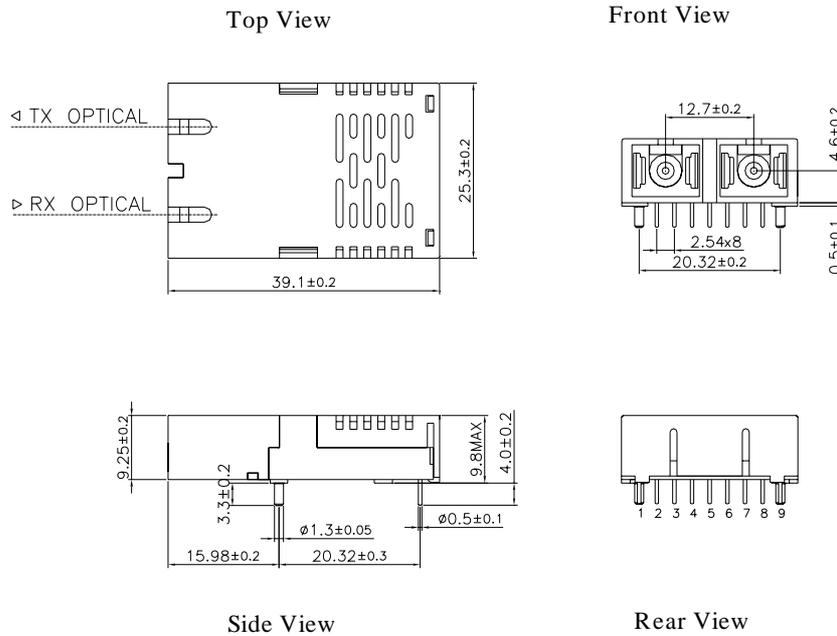

D: Black case


E: Blue case

Order Information

Table 8 – Order Information

Part No.	Part No.	Part No.
C-127-155-TDFB(3)-SSC6(G5)	C-127-155-TDFB(3)-SSC6D(G5)	C-127-155-TDFB(3)-SSC6E(G5)
C-129-155-TDFB(3)-SSC6(G5)	C-129-155-TDFB(3)-SSC6D(G5)	C-129-155-TDFB(3)-SSC6E(G5)
C-131-155-TDFB(3)-SSC6(G5)	C-131-155-TDFB(3)-SSC6D(G5)	C-131-155-TDFB(3)-SSC6E(G5)
C-133-155-TDFB(3)-SSC6(G5)	C-133-155-TDFB(3)-SSC6D(G5)	C-133-155-TDFB(3)-SSC6E(G5)
C-135-155-TDFB(3)-SSC6(G5)	C-135-155-TDFB(3)-SSC6D(G5)	C-135-155-TDFB(3)-SSC6E(G5)
C-137-155-TDFB(3)-SSC6(G5)	C-137-155-TDFB(3)-SSC6D(G5)	C-137-155-TDFB(3)-SSC6E(G5)
C-139-155-TDFB(3)-SSC6(G5)	C-139-155-TDFB(3)-SSC6D(G5)	C-139-155-TDFB(3)-SSC6E(G5)
C-141-155-TDFB(3)-SSC6(G5)	C-141-155-TDFB(3)-SSC6D(G5)	C-141-155-TDFB(3)-SSC6E(G5)
C-143-155-TDFB(3)-SSC6(G5)	C-143-155-TDFB(3)-SSC6D(G5)	C-143-155-TDFB(3)-SSC6E(G5)
C-145-155-TDFB(3)-SSC6(G5)	C-145-155-TDFB(3)-SSC6D(G5)	C-145-155-TDFB(3)-SSC6E(G5)
C-147-155-TDFB(3)-SSC6(G5)	C-147-155-TDFB(3)-SSC6D(G5)	C-147-155-TDFB(3)-SSC6E(G5)
C-149-155-TDFB(3)-SSC6(G5)	C-149-155-TDFB(3)-SSC6D(G5)	C-149-155-TDFB(3)-SSC6E(G5)
C-151-155-TDFB(3)-SSC6(G5)	C-151-155-TDFB(3)-SSC6D(G5)	C-151-155-TDFB(3)-SSC6E(G5)
C-153-155-TDFB(3)-SSC6(G5)	C-153-155-TDFB(3)-SSC6D(G5)	C-153-155-TDFB(3)-SSC6E(G5)
C-155-155-TDFB(3)-SSC6(G5)	C-155-155-TDFB(3)-SSC6D(G5)	C-155-155-TDFB(3)-SSC6E(G5)
C-157-155-TDFB(3)-SSC6(G5)	C-157-155-TDFB(3)-SSC6D(G5)	C-157-155-TDFB(3)-SSC6E(G5)
C-159-155-TDFB(3)-SSC6(G5)	C-159-155-TDFB(3)-SSC6D(G5)	C-159-155-TDFB(3)-SSC6E(G5)
C-161-155-TDFB(3)-SSC6(G5)	C-161-155-TDFB(3)-SSC6D(G5)	C-161-155-TDFB(3)-SSC6E(G5)

Part Numbering Definition:

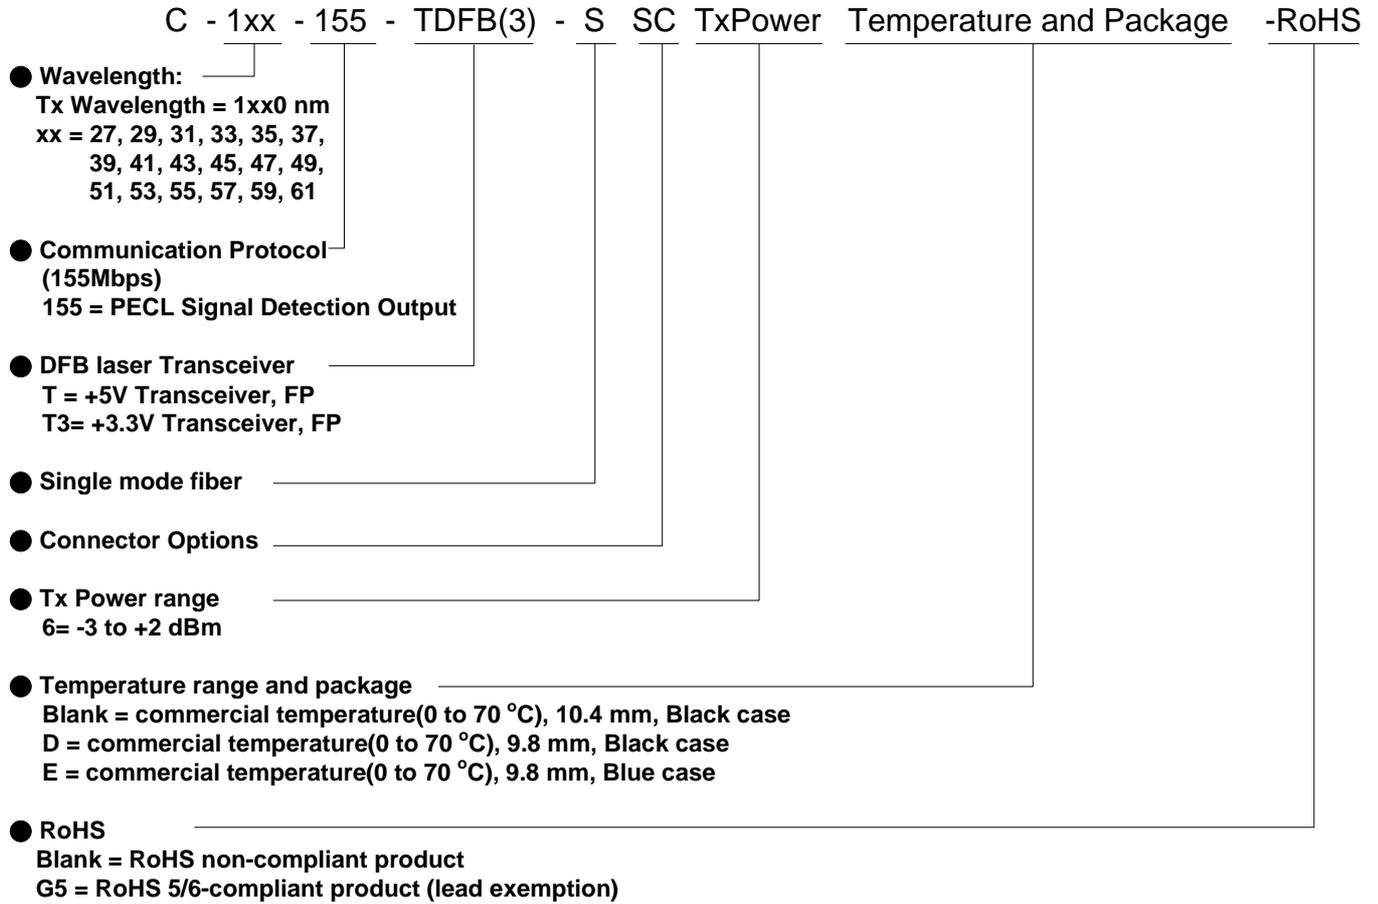

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Legal Notice

IMPORTANT NOTICE!

All information contained in this document is subject to change without notice, at Source Photonics' sole and absolute discretion. Source Photonics warrants performance of its products to current specifications only in accordance with the company's standard one-year warranty; however, specifications designated as "preliminary" are given to describe components only, and Source Photonics expressly disclaims any and all warranties for said products, including express, implied, and statutory warranties, warranties of merchantability, fitness for a particular purpose, and non-infringement of proprietary rights. Please refer to the company's Terms and Conditions of Sale for further warranty information.

Source Photonics assumes no liability for applications assistance, customer product design, software performance, or infringement of patents, services, or intellectual property described herein. No license, either express or implied, is granted under any patent right, copyright, or intellectual property right, and Source Photonics makes no representations or warranties that the product(s) described herein are free from patent, copyright, or intellectual property rights. Products described in this document are NOT intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. Source Photonics customers using or selling products for use in such applications do so at their own risk and agree to fully defend and indemnify Source Photonics for any damages resulting from such use or sale.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED ON AN "AS IS" BASIS. Customer agrees that Source Photonics is not liable for any actual, consequential, exemplary, or other damages arising directly or indirectly from any use of the information contained in this document. Customer must contact Source Photonics to obtain the latest version of this publication to verify, before placing any order, that the information contained herein is current.

Contact

U.S.A. Headquarters

20550 Nordhoff Street
Chatsworth, CA 91311
USA

Tel: +1-818-773-9044

Fax: +1-818-773-0261

sales@sourcephotonics.com

China

Building #2&5, West Export Processing Zone
No. 8 Kexin Road, Hi-Tech Zone
Chengdu, 611731, China

Tel: +86-28-8795-8788

Fax: +86-28-8795-8789

sales@sourcephotonics.com.cn

Taiwan

9F, No 81, Shui Lee Rd.
Hsinchu, 300, Taiwan
R.O.C.

Tel: +886-3-5169222

Fax: +886-3-5169213

sales@sourcephotonics.com.tw

© Copyright Source Photonics, Inc. 2007~2008

All rights reserved