
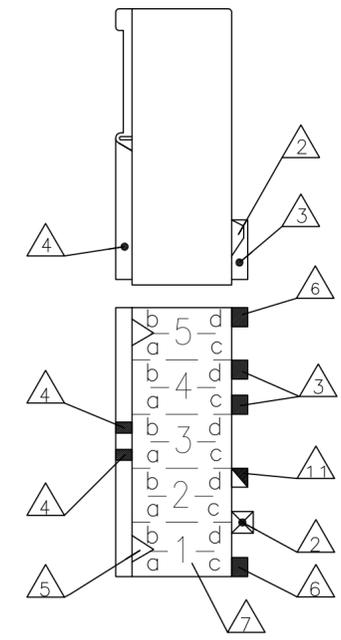


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19-- .- .
 © COPYRIGHT 19-- BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AI	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

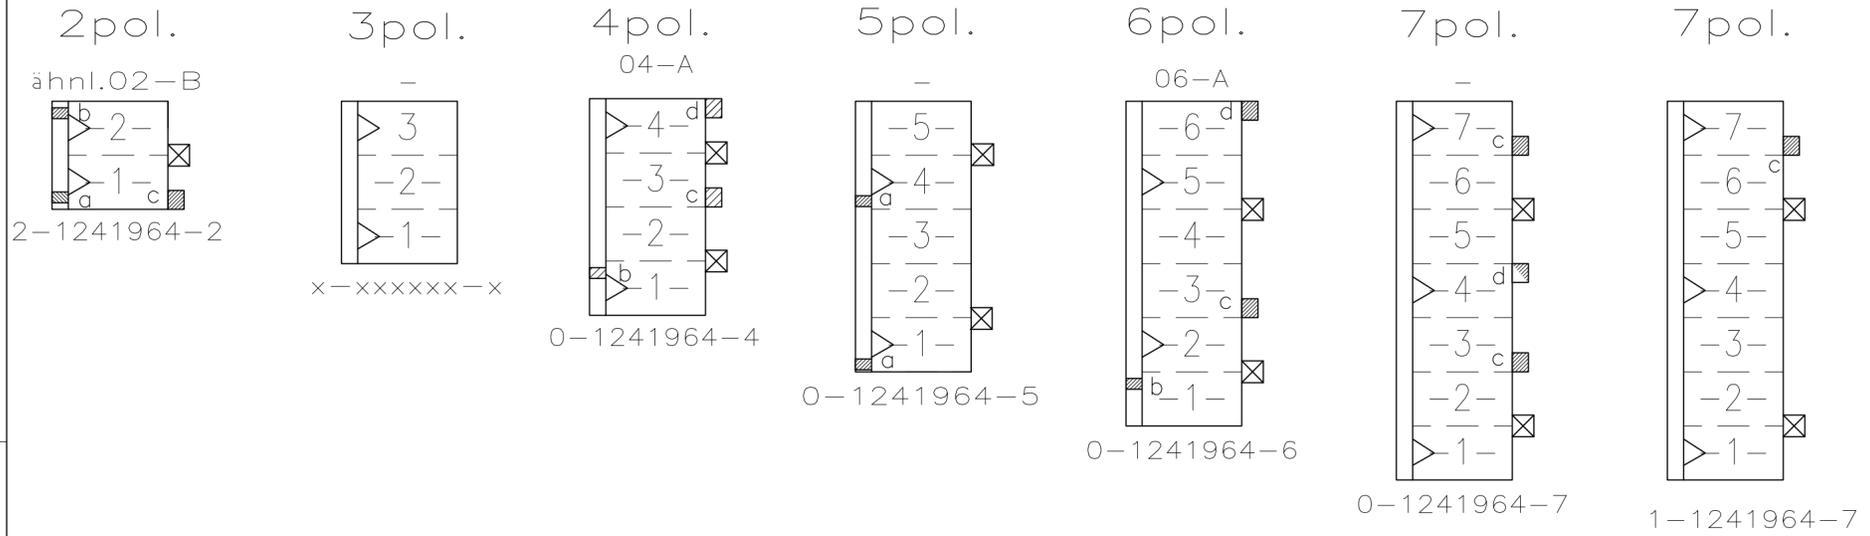


Darstellung:
 Lage der Kodier- und Polarisierungsrippen und Rastfedern am Gehäuse

DESCRIPTION:
 POSITION OF KEYING RIB AND THE LOCKING LATCH AT THE HOUSINGS

Bemerkungen

- NOTES
- 2 Rasthaken zwischen Kammer Nr. ...
LOCKING LATCH BETWEEN CAVITY NO. ...
 - 3 Kodierrippen nach unten (Lage "c") oder oben (Lage "d") versetzt, bei Kammer Nr. ...
KEYING RIB POSITION "c" OR POSITION "d", AT CAVITY NO. ...
 - 4 Polarisierungsrippen durchgehend bis Scharnier, nach unten (Lage "a") oder oben (Lage "b") versetzt, bei Kammer Nr. ...
POLARIZATION RIB GO THROUGH TO HINGE, POSITION "a" OR "b", AT CAVITY NO. ...
 - 5 Verrastung für Deckel bei Kammer Nr. ...
LOCKING DEVICE FOR COVER AT CAVITY NO. ...
 - 6 Kodierrippen bei erster Kammer, Lage "c", und letzter Kammer, Lage "d", bündig mit Gehäuseaußenkante
KEYING RIBS AT THE FIRST CAVITY, POSITION "c", AND THE LAST CAVITY, POSITION "d", FLUSH TO THE EDGE OF THE CONNECTOR
 - 7 Kammernummer
CAVITY NUMBER
 - 8 Passender TE Gegenstecker: (siehe Stückliste)
MATED WITH TE CONNECTOR: (SEE PARTS LIST)
 - 9 Generell passende Flachsteckerwanne siehe RAST5 Vorgabe
GENERAL SUITABLE TAB HEADER HOUSING SEE RAST5 PERFORMANCE
 - 10 Leiterplattenanschluß siehe Zeichnung 88-9935-2
CONNECTION TO THE PC BOARD SEE DRAWING 88-9935-2
 - 11 Angeschrägte Kodierrippen nach unten (Lage "c") oder oben (Lage "d") versetzt, bei Kammer Nr. ...
SWAGED KEYING RIB POSITION "c" OR POSITION "b", AT CAVITY NO. ...
 - 12 Material entspricht den Anforderungen der EN 60335 (incl. glow wire test 750°C, ohne Flamme)
MATERIAL MEETS THE REQUIREMENTS OF EN 60335 (INCL.GLOW WIRE TEST 750°C, NO FLAME)

11 pol.

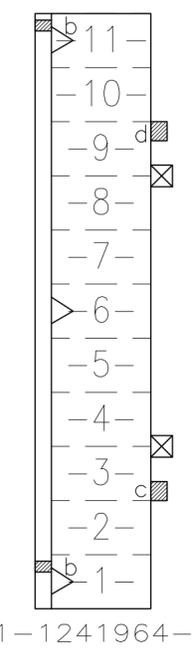

-	-	-	-	-	-	-	-
1-1241964-1	11	55	50	NATURE/natur	A	9/10	
1-1241964-7	7	35	30	NATURE/natur	A	9/10	
0-1241964-7	7	35	30	NATURE/natur	A	9/10	
-	-	-	-	-	-	-	-
0-1241964-6	6	30	25	NATURE/natur	A	9/10	
-	-	-	-	-	-	-	-
0-1241964-5	5	25	20	NATURE/natur	A	9/10	
0-1241964-4	4	20	15	NATURE/natur	A	9/10	
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
2-1241964-2	2	10	5	NATURE/natur	A	9/10	
Bestell-Nr.	Pol-Zahl	Maß A	Maß B	Farbe	Material	Rev.	Gegenstecker
PART NO.	POS.	DIM A	DIM B	COLOUR	MATERIAL	REV.	MATED WITH

Stückliste/PARTS LIST

PAG 06 JUL 94 V-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.25mm	DWN Mahnke.B 28-NOV-02	Tyco Electronics AMP GmbH D - 64625, Bensheim
		CHK Stredak.F 29-NOV-02	
		APVD Bleicher.M 30-NOV-02	NAME: 2-7 POS. STANDARD-TIMER HOUSING WITH INTERIOR LOCKING, PITCH 5mm 2-7 pol. Standard-Timer Gehäuse mit Innenverrastung, RAST5
		PRODUCT SPEC	
MATERIAL: SEE PARTS LIST	FINISH: -	WEIGHT: -	SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=1241964
SEE PARTS LIST Siehe Stückliste		CUSTOMER DRAWING	RESTRICTED TO: -

SCALE: 5:1 SHEET: 2 of 2 REV: A6

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1241964-6](#)