


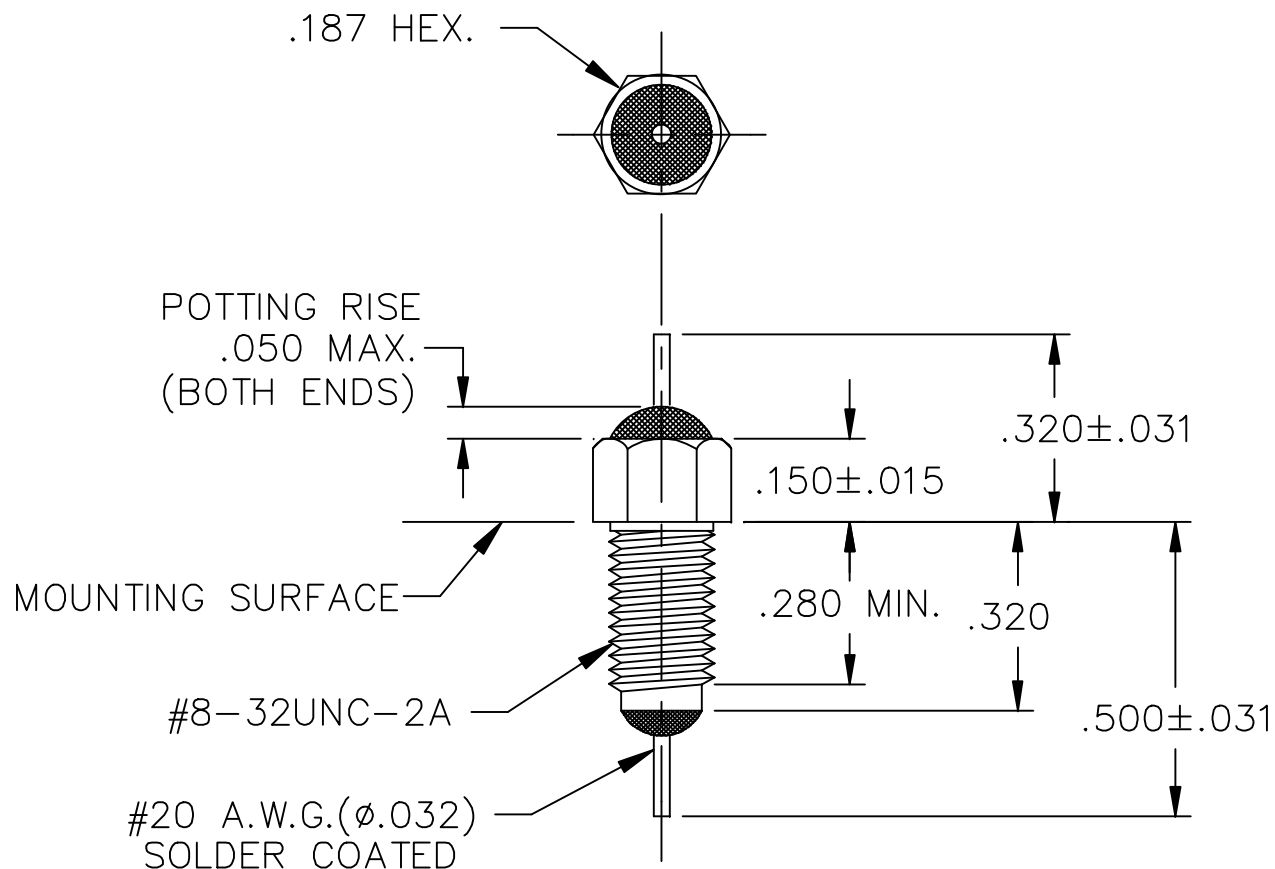

NOTE:
SUGGESTED MTG. HOLE Ø.180
HARDWARE IS INCLUDED

13


CAPACITANCE	.028uF - .120uF
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 100 VDC 125°C 70 VDC
DC RESISTANCE	.01ohms MAX.

IL=PER MIL-STD-220, @25°C N/L

MIN. NO LOAD

FREQ. MHz	I.L. (db)
1	10
3	14
10	38
30	65
--	--
100	75
300	75
1 GHz	75


SCHEMATIC



MARKING:

PART: S001 (FAIRVIEW)
S001(M) (MEXICO)

BAG: SCI-1293-001
DATE CODE
QTY/BAG (200 MAX.)

	13	12	11	10	9	8	7	6	5	4	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED	 FAIRVIEW PENNSYLVANIA	
	CN 51849-ENG	CN 29708-CPD	CN 10869-CPD	CN 207992	CN 207674	CN 207260	CN 201766	CN 189900	CN 181176	CN 176583 REDRAWN	CHANGE NOTICE	Fractions $\pm 1/64$	SPECTRUM CONTROL INC.	
												Dec. .xx $\pm$	Dwn. KEVERLINE	Description
												Dec. .xxx $\pm$.010	Date 11-23-09	Pi, RESIN SEAL FILTER
												Angles $\pm 0^{\circ} 30'$	Engr. B.DEVINE	1293-001
												CODE IDENT. NO. DLSP2	Scale NONE	