

### CST-1025

#### Description:

Triad current sense transformers are used to detect the current passing through a conductor. These transformers are very reliable and operate efficiently at 50/60 Hz.

#### Electrical Specifications (@25C)


| IP<br>Amps | Turns<br>Ratio | Terminating<br>Resistor |       | DCR<br>( $\Omega$ )<br>Nominal | Volts/Amp@ rated IP<br>for various loads ( $\Omega$ ) |       |       |       | Net<br>Weight<br>Grams |
|------------|----------------|-------------------------|-------|--------------------------------|-------------------------------------------------------|-------|-------|-------|------------------------|
|            |                | Ohms                    | Watts |                                | 100                                                   | 500   | 2K    | 5K    |                        |
| 25         | 1000:1         | 100                     | .063  | 46                             | .0976                                                 | .4364 | .7496 | .9664 | 30                     |

#### Dimensions:

| A     | B     | C     | D     | E     | F     |
|-------|-------|-------|-------|-------|-------|
| 30.20 | 30.20 | 14.30 | 20.32 | 10.16 | 11.40 |

Units: In mm

#### Schematic:

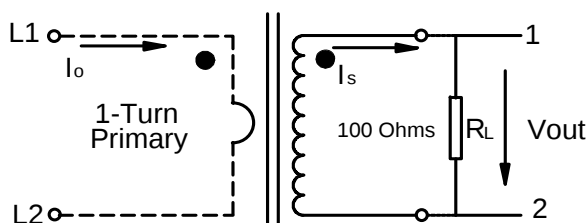


#### Technical Notes:

1. Pin3 for mechanical support only.
2. Pin diameter is  $0.8 \pm 0.1$  mm.
3. Pin length is  $5 \pm 1$  mm.

**RoHS Compliance:** As of manufacturing date February 2005, all standard products meet the requirements of 2002/95/EC, known as the RoHS initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

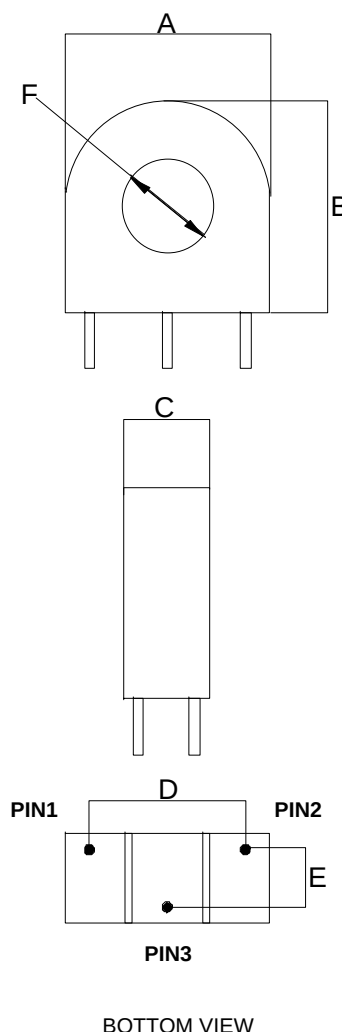

BOTTOM VIEW

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Triad Magnetics:](#)

[CST-1025](#)