


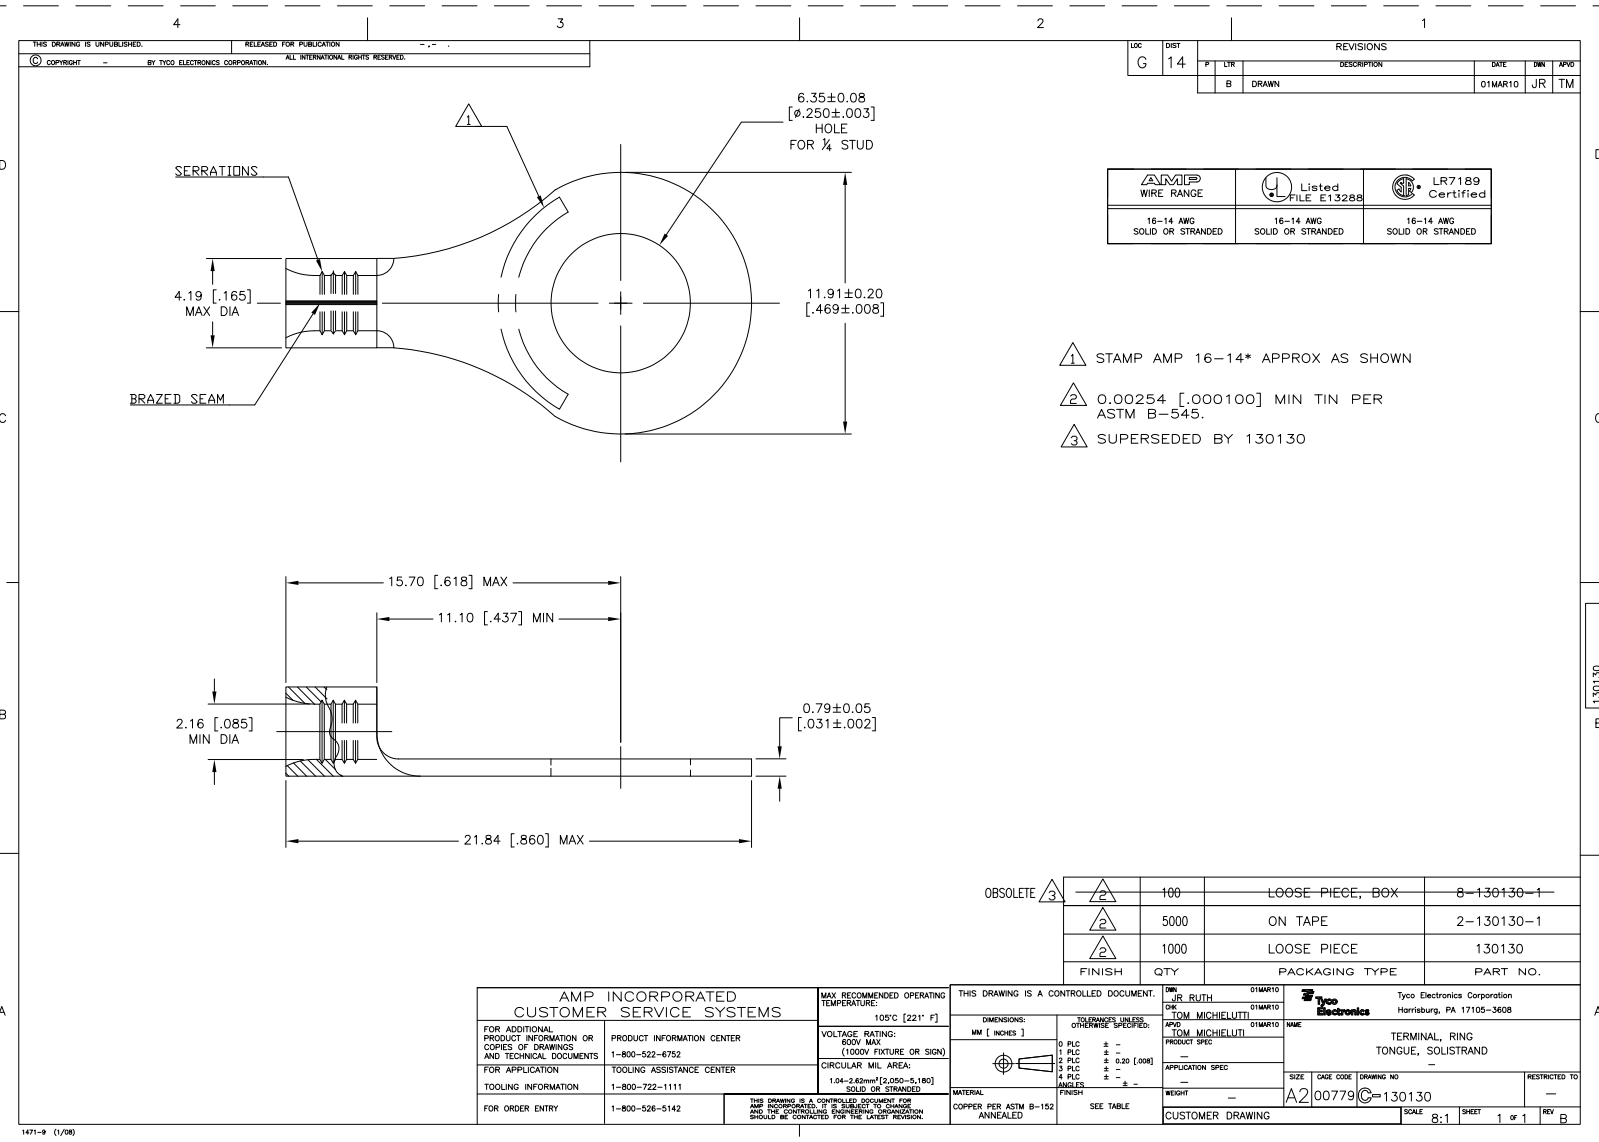

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		REV		REVISIONS		DATE		BY		APPROVED	
G	14	P	L	B	DRAWN	DESCRIPTION	DATE	BY	APPROVED	DATE	BY	APPROVED	DATE

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- STAMP AMP 16-14* APPROX AS SHOWN
- 0.00254 [.000100] MIN TIN PER ASTM B-545.
- SUPERSEDED BY 130130

OBSOLETE	100	LOOSE PIECE, BOX	8-130130-1
	5000	ON TAPE	2-130130-1
	1000	LOOSE PIECE	130130
FINISH		PACKAGING TYPE	
QTY		PART NO.	

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)	CIRCULAR MIL AREA: 1.04-2.42mm² [2.050-5.180] SOLID OR STRANDED
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP TECHNOLOGIES. IT IS SUBJECT TO CHANGE AND THE CONTROLLING SUPERSEDING DOCUMENTATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	
FOR ORDER ENTRY	1-800-526-5142	MATERIAL COPPER PER ASTM B-152 ANNEALED	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWN BY: JR. RUTH DATE: 01MAR10	
DIMENSIONS: MM [INCHES]		CHECKED BY: TOM. MICHELLETTI DATE: 01MAR10	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PROJECT SPEC:	
0 PLG ± .005		APPLICATION SPEC:	
1 PLG ± .005		WEIGHT:	
2 PLG ± .005		FINISH:	
3 PLG ± .005		SEE TABLE	
4 PLG ± .005		CUSTOMER DRAWING	
ANGLES:		SIZE CASE CODE DRAWING NO.	
FINISH:		A2 00779 C=130130	
MATERIAL:		SCALE: 8:1	
COPPER PER ASTM B-152		SHEET 1 of 1	
ANNEALED		REV B	