


REV.	DATE	DESCRIPTION
NC	04/17/00	INITIAL RELEASE
A	07/21/05	UPDATE DRAWING FORMAT

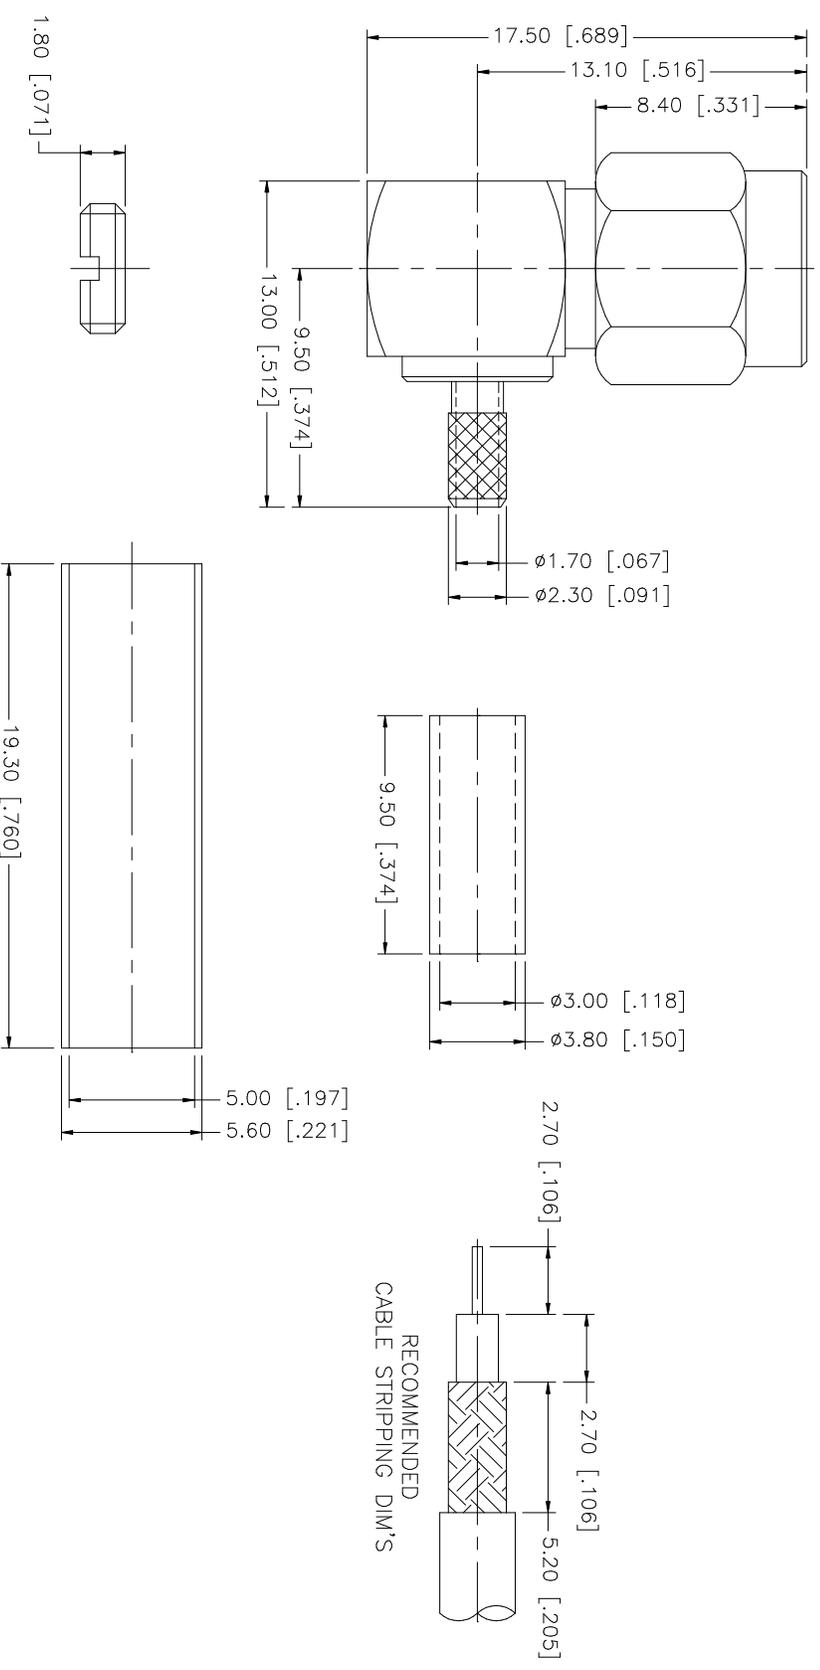

NOTES:
 1. CRIMPED FERRULE
 HEX CRIMP SIZE .128"

Amphenol Connex

PART DESCRIPTION
 SMA R/A CRIMP PLUG, REVERSE POLARIZED
 (FOR RG-174/U, 188/U, 316/U CABLE)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:	APPROVALS	DATE	PART NO.
0.5 - 8mm ± 0.20mm	DRAWN G.R.S.	07/21/05	132123RP
8 - 30mm ± 0.40mm	CHECKED		
30 - 120mm ± 0.50mm	ISSUED		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	SHEET 1 OF 1		
.020 - .315 ± 0.007"			
.315 - 1.180 ± 0.015"			
1.180 - 4.724 ± 0.020"			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. TOLERANCES FOR MILLIMETERS ARE:			
0.5 - 8mm ± 0.20mm			
8 - 30mm ± 0.40mm			
30 - 120mm ± 0.50mm			
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:			
.020 - .315 ± 0.007"			
.315 - 1.180 ± 0.015"			
1.180 - 4.724 ± 0.020"			
DESCRIPTION	MATERIAL	FINISH	QTY
HEAT SHRINK TUBE			
FERRULE	COPPER	GOLD	1
CONTACT PIN	BRASS	GOLD	1
INSULATOR	TEFLON	NATURAL	1
BODY	BRASS	GOLD	1
DESCRIPTION	MATERIAL	FINISH	QTY

DO NOT SCALE DRAWING	CAD FILE
	C:/132/132123RP.DWG

DWG. NO.	REV.	SIZE	SCALE
132123RP.DWG	A	A	NA