
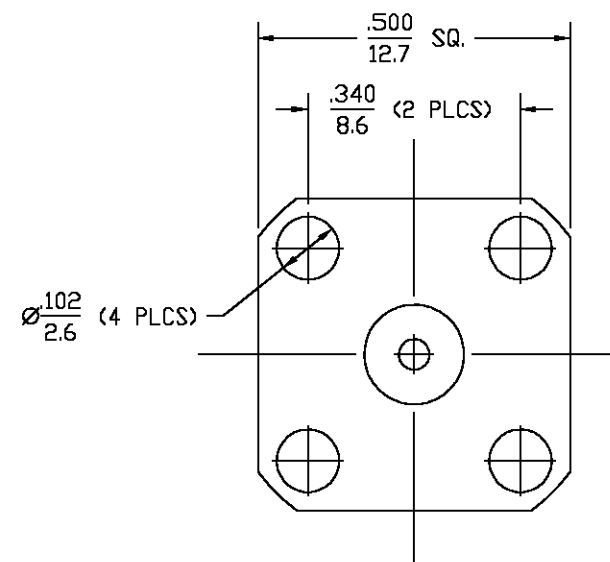


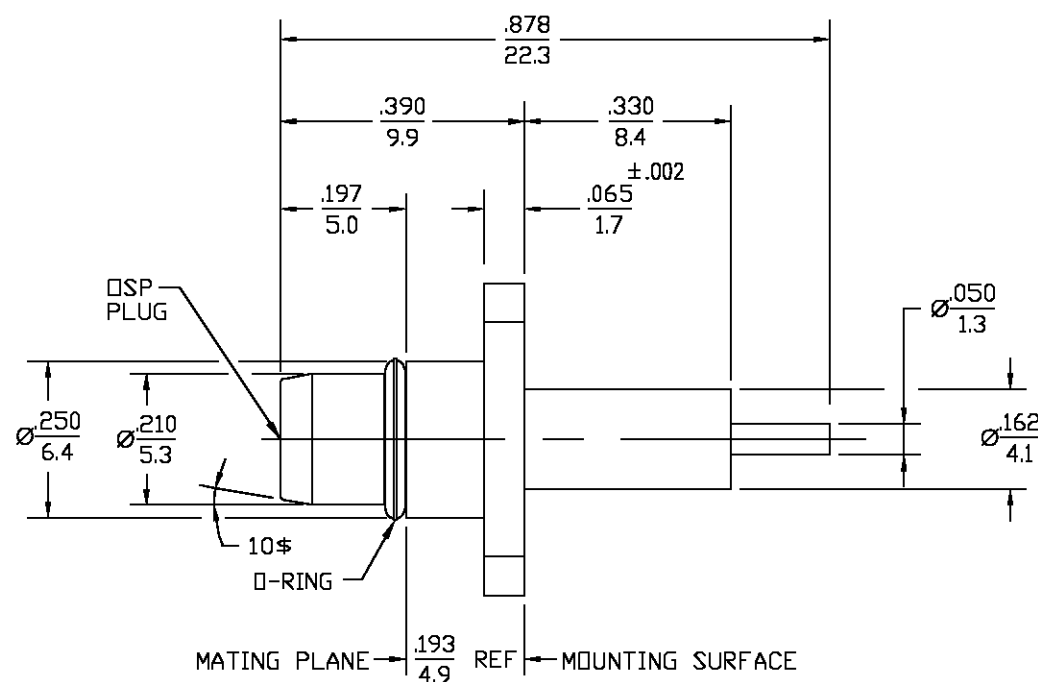

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
03 ₂	REVISED	7/18/97	JGH
C	REVISED PER ECN 0S14-0146-02	GV 21MAY03	JGH

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions	TEMPERATURE RATING -65° TO +125°C
Frequency Range (GHz) DC to 18	MIL-STD-348A FIG. 321-1	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 500	Force to Engage (In-Lbs MAX) 3 & Disengage (In-Lbs MAX) 1.5	Shock MIL-STD-202, Method 213, Condition I
VSWR 1.05+0.05f(GHz) DC to 18 GHz	Center Contact Captivation	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) .03x√f(GHz)	Axial (Lbs) 6.0	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB MIN) (Fully Mated) -(60-f(GHz))	Weight (Grams) TBD	Corrosion - MIL-STD-202, Method 101, Condition B
Corona, 70,000 Ft (VRMS MIN) 335		
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1000		
Contact Resistance (Milliohms MAX) Center Contact 2.0 Outer Contact 2.0		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1000		
I.R.(Megohms MIN) 5000		

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BRASS PER ASTM B 16	GOLD PLATE PER MIL-G-45204
O-RING	FLOUROSILICONE PER MIL-R-25988, CLASS I, TYPE I.	N/A
COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		AMP Incorporated. Waltham, MA 02254
DRAWN BY JP DATE 4/13/83 CHECKED BY AJA 2/7/84 APP'D BY JB 2/27/84		tyco Electronics
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF M/A-COM INCORPORATED AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEM(S) WITHOUT WRITTEN PERMISSION.		TITLE OSP 4 HOLE FLANGE MOUNT PLUG RECEPTACLE STRAIGHT TERMINAL
USE ASS'Y PROCEDURE NO. A.P. N/A		SIZE B CODE IDENT NO. 26805 4551-1201-02 REV 03 ₂
SCALE 4:1		SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1329846-1
SHEET 1 OF 1 REV C