



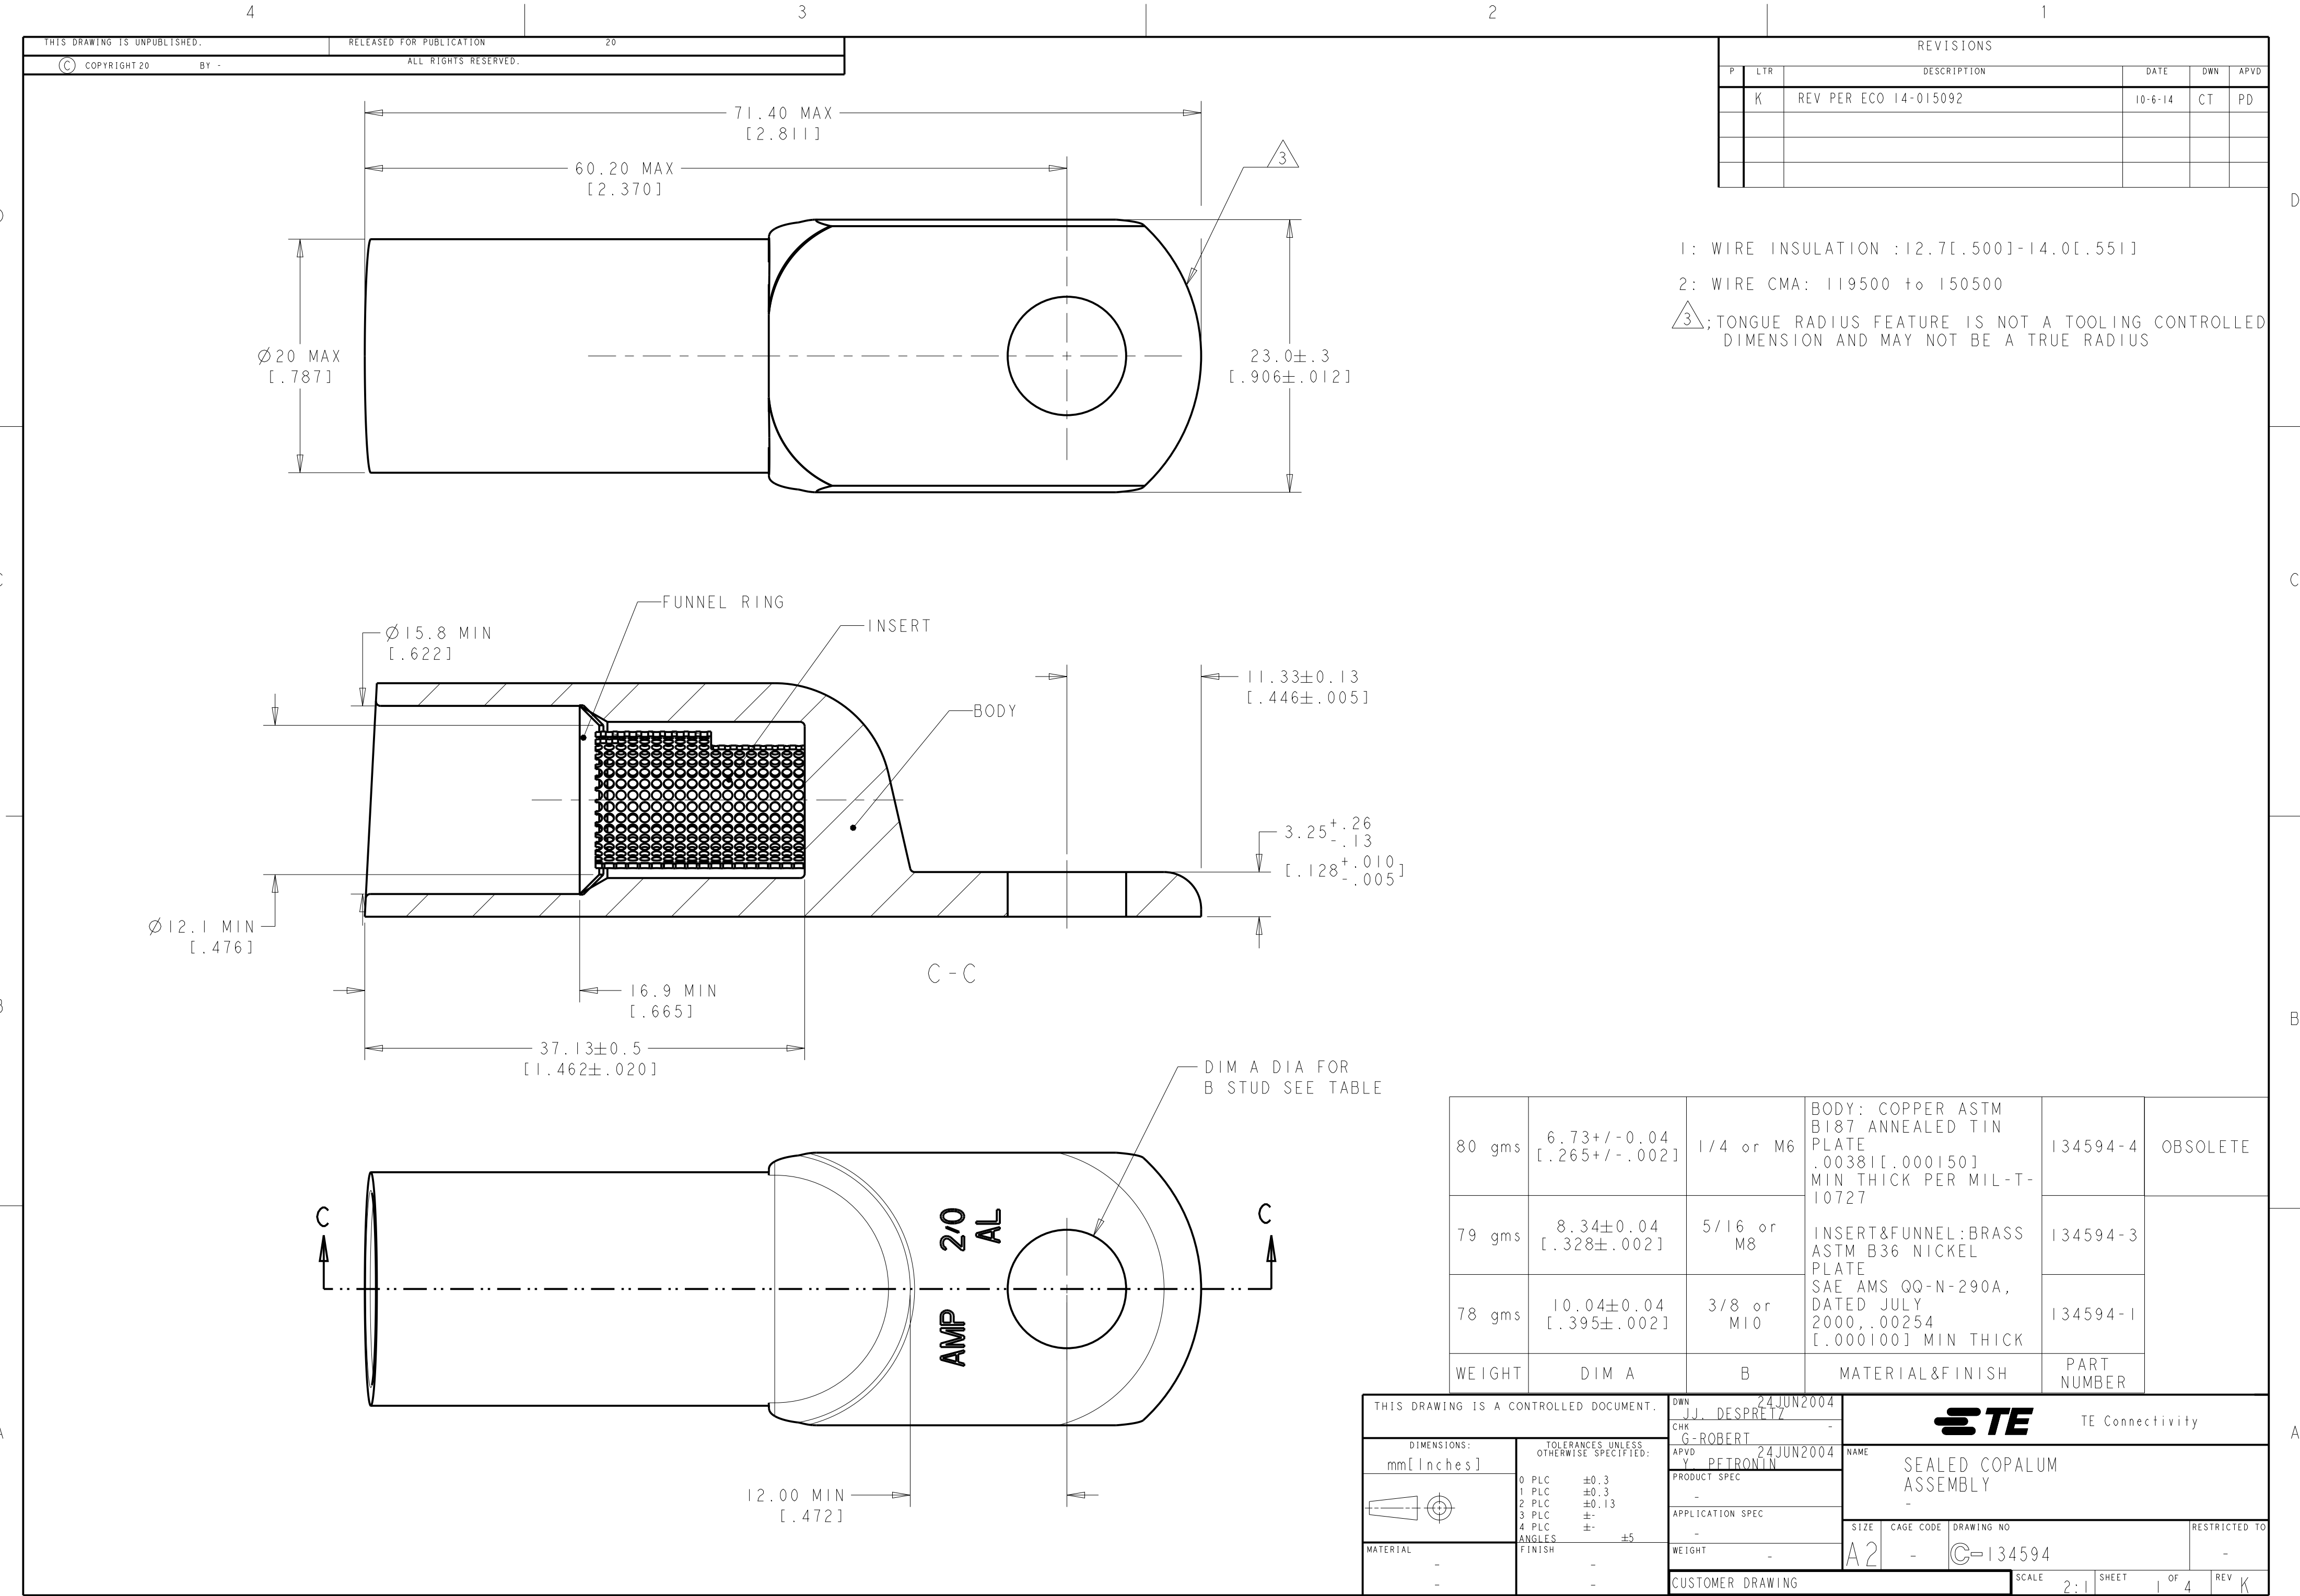

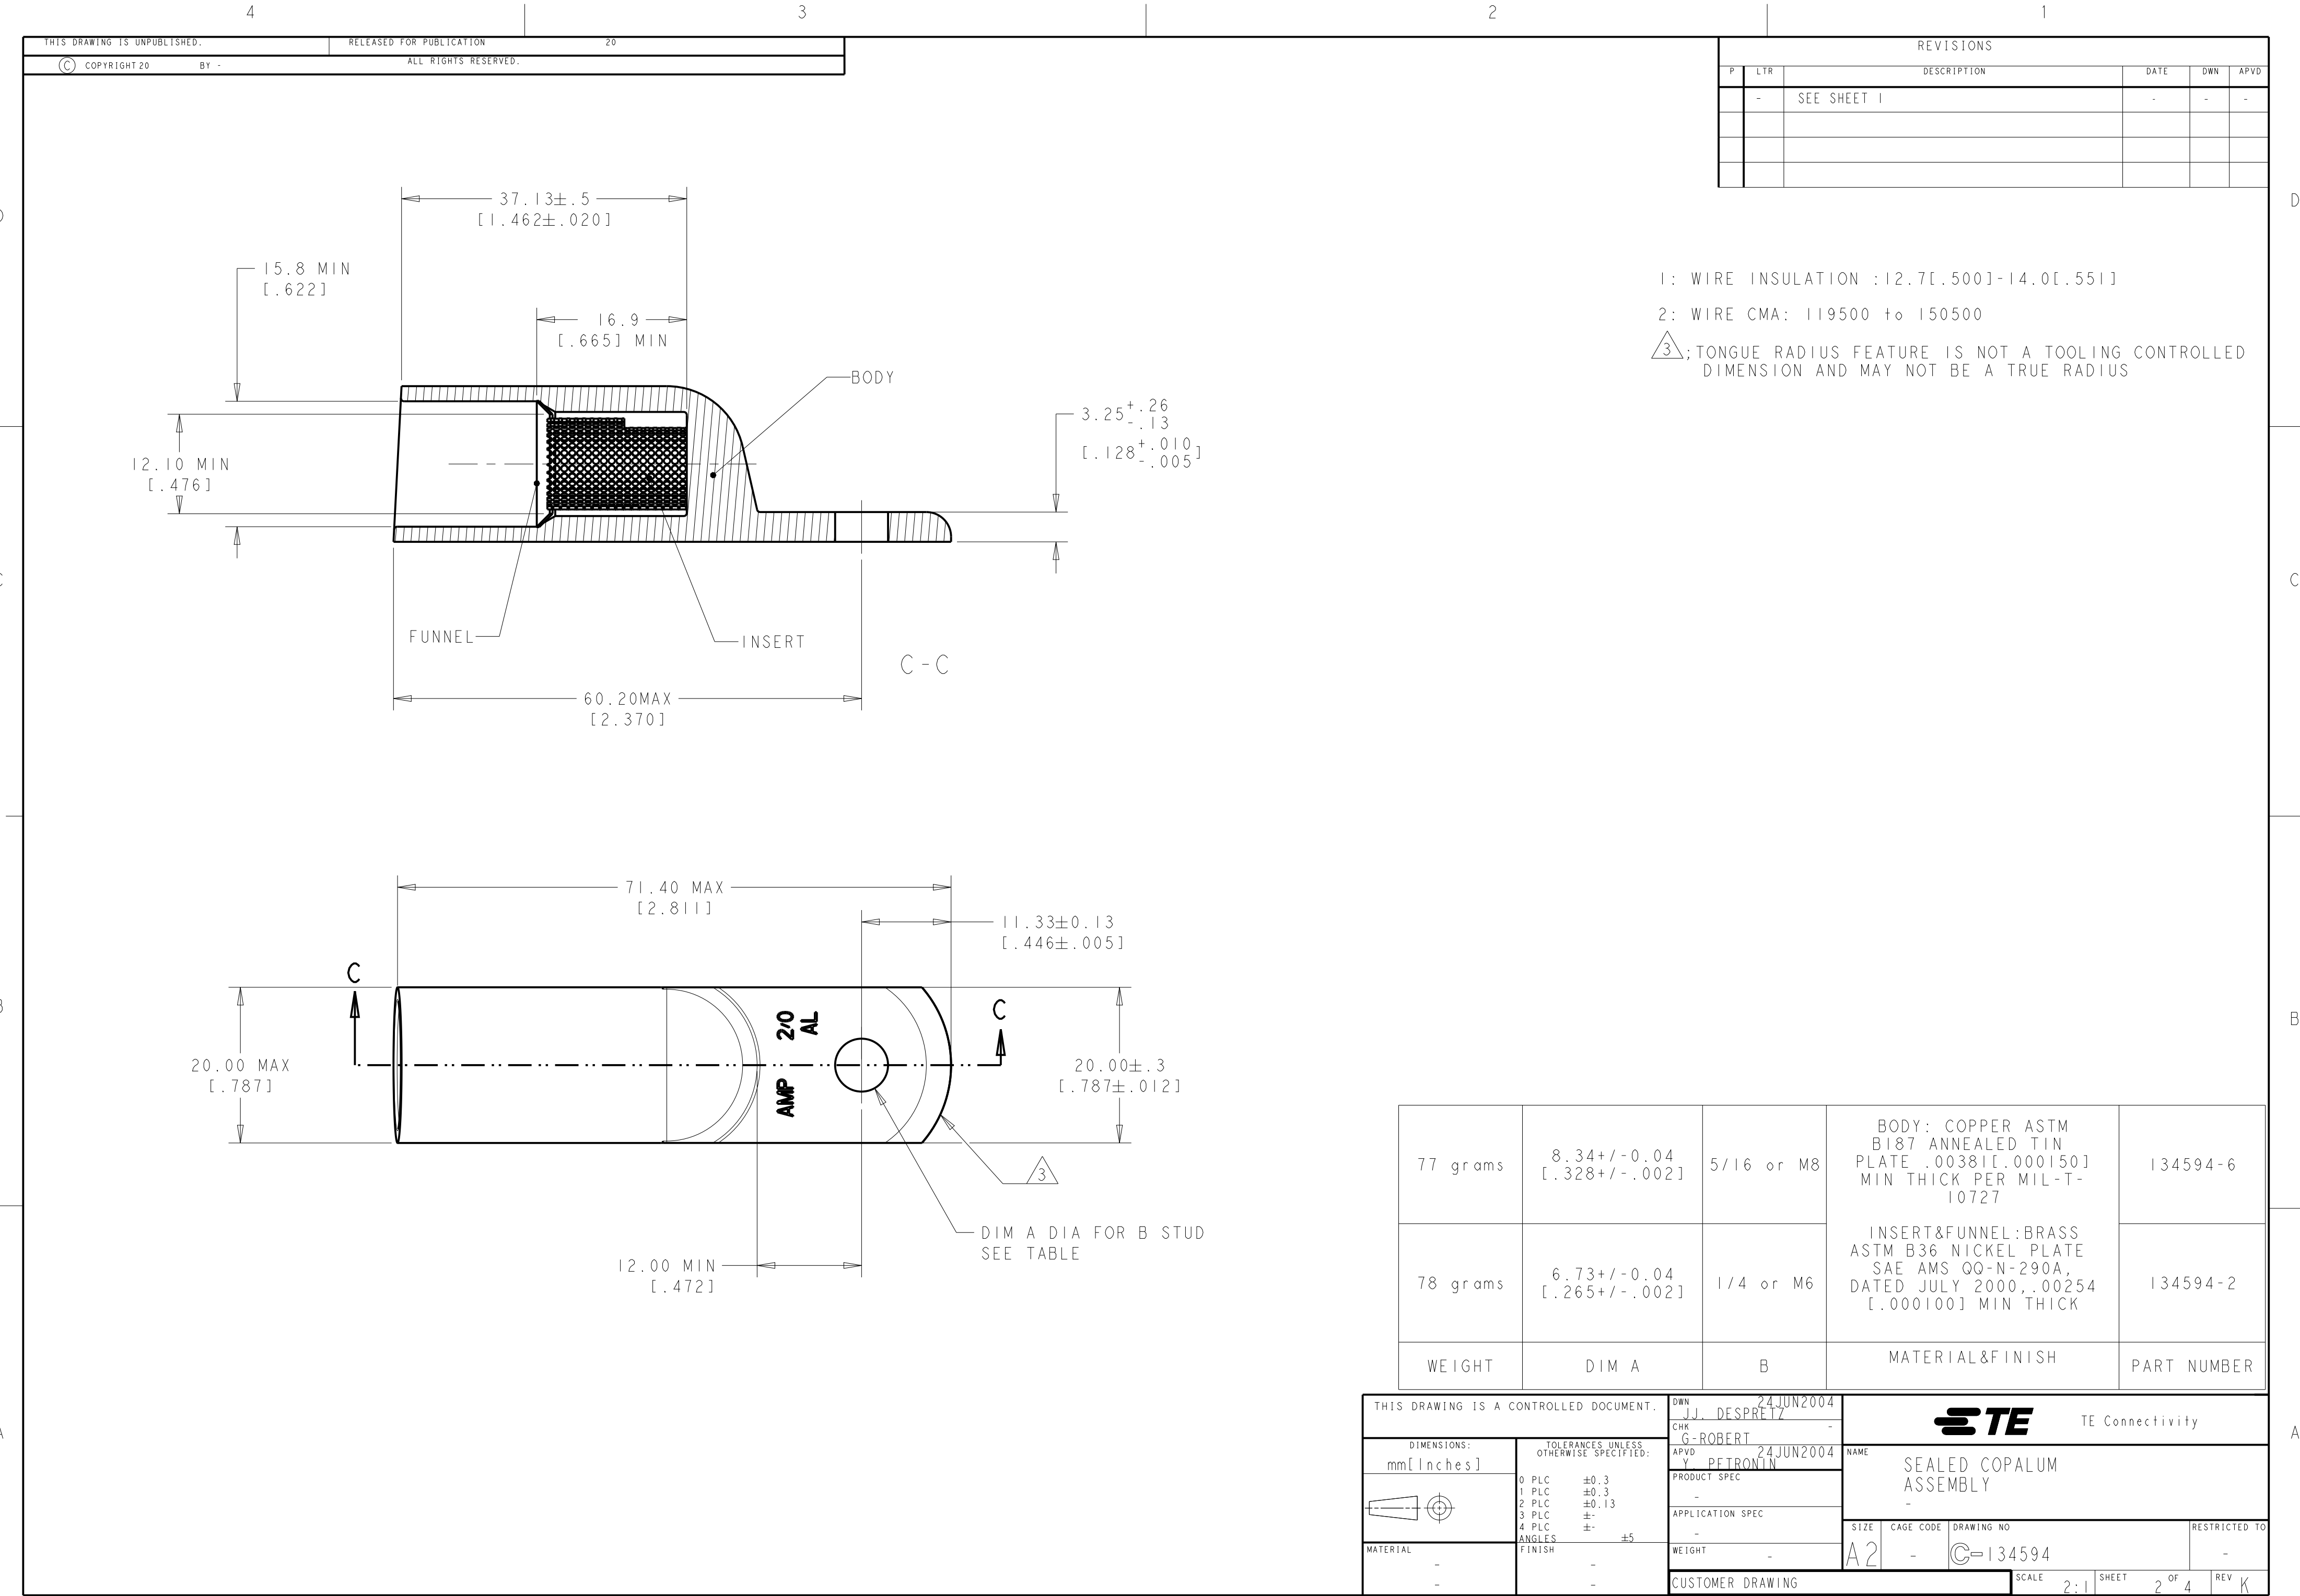


1: WIRE INSULATION :12.7[.500]-14.0[.551]
2: WIRE CMA: 119500 to 150500
3; TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS

77 grams	8.34+/-0.04 [.328+/- .002]	5/16 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .0038[.000150] MIN THICK PER MIL-T-10727	134594-6
78 grams	6.73+/-0.04 [.265+/- .002]	1/4 or M6	INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-2
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JJ. DESPRETZ 24JUN2004	 TE Connectivity					
DIMENSIONS: mm[Inches]		CHK G-ROBERT 24JUN2004						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Y. PETRONIN	NAME SEALED COPALUM ASSEMBLY				
	0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±5		PRODUCT SPEC - APPLICATION SPEC -					
	MATERIAL		FINISH	WEIGHT	SIZE A2	CAGE CODE -	DRAWING NO C-134594	RESTRICTED TO
					CUSTOMER DRAWING			SCALE 2:1 SHEET 2 OF 4 REV K

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

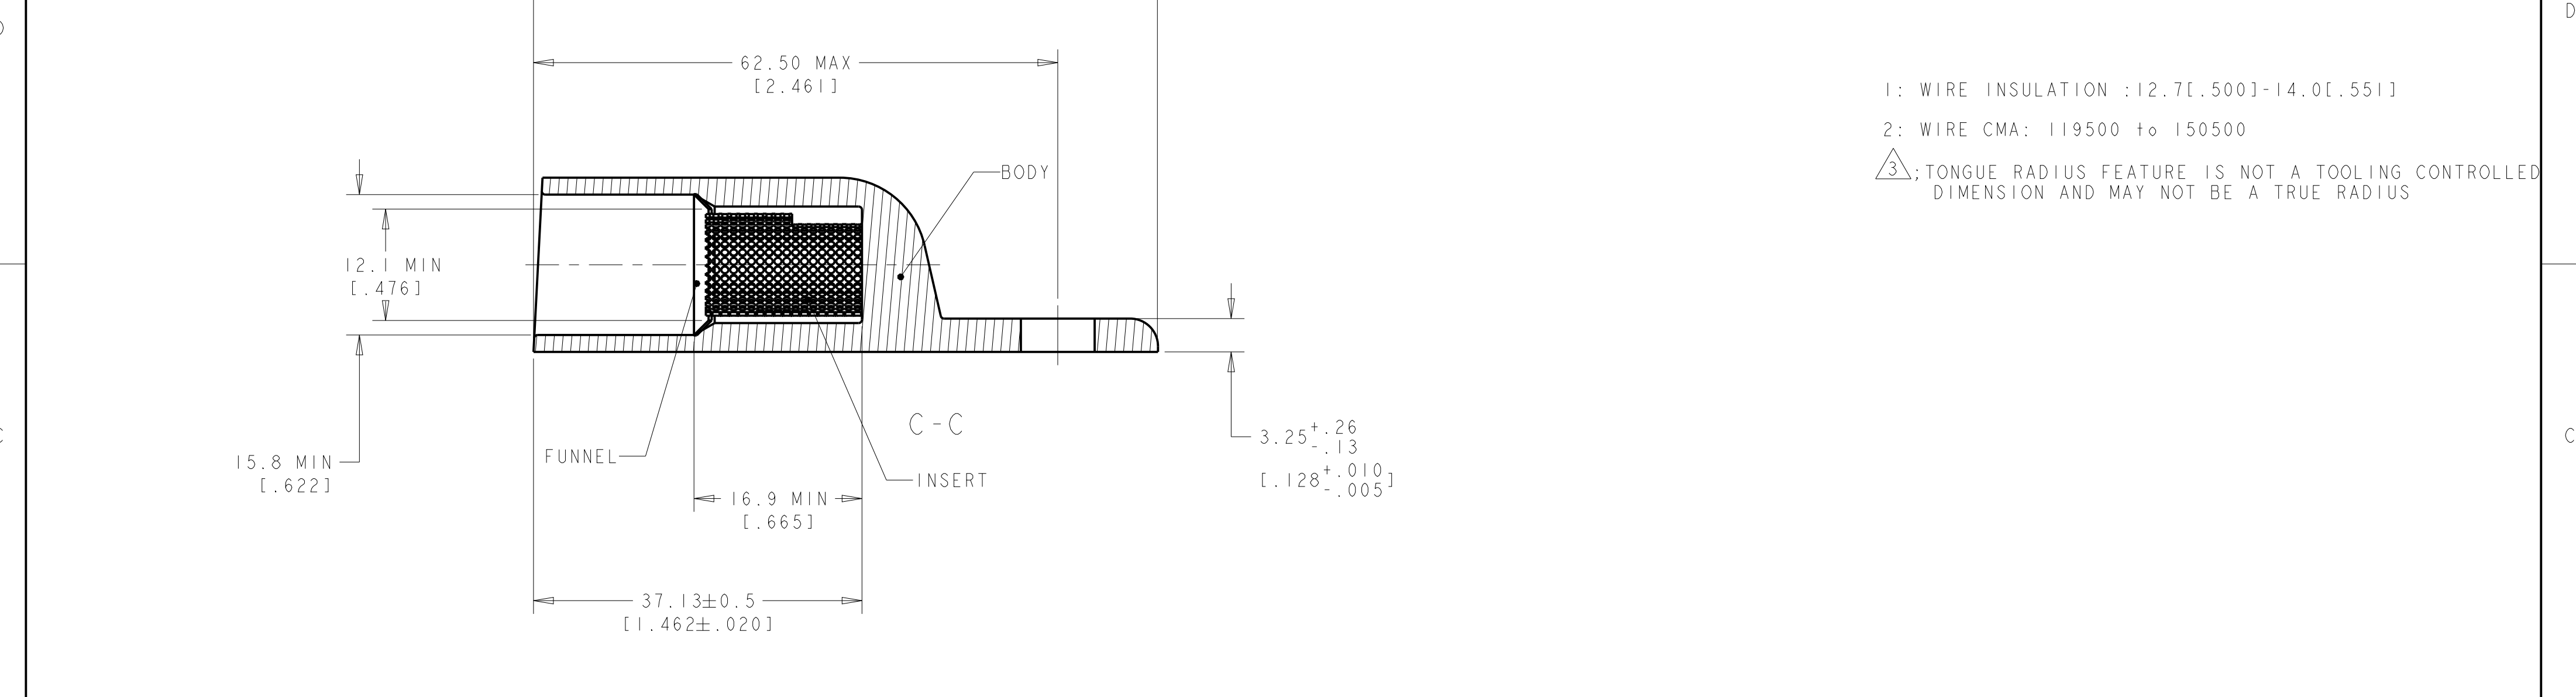

77 grams	8.34±0.04 [.328±.002]	5/6 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .0038[.000150] MIN THICK PER MIL-T- 10727 INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-5
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm[Inches]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±0.3
1 PLC ±0.3
2 PLC ±0.13
3 PLC ±
4 PLC ±
ANGLES ±5
FINISH -
-

APVD
Y PETRONIN

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

24JUN2004
JJ. DESPRETZ

24JUN2004
G-ROBERT

24JUN2004
Y PETRONIN

NAME
SEALED COPALUM
ASSEMBLY

SIZE
A2

CAGE CODE
-

DRAWING NO
134594

RESTRICTED TO
-

SCALE
2:1

SHEET
3 OF 4

REV
K

D

C

B

A


D

C


B

A


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

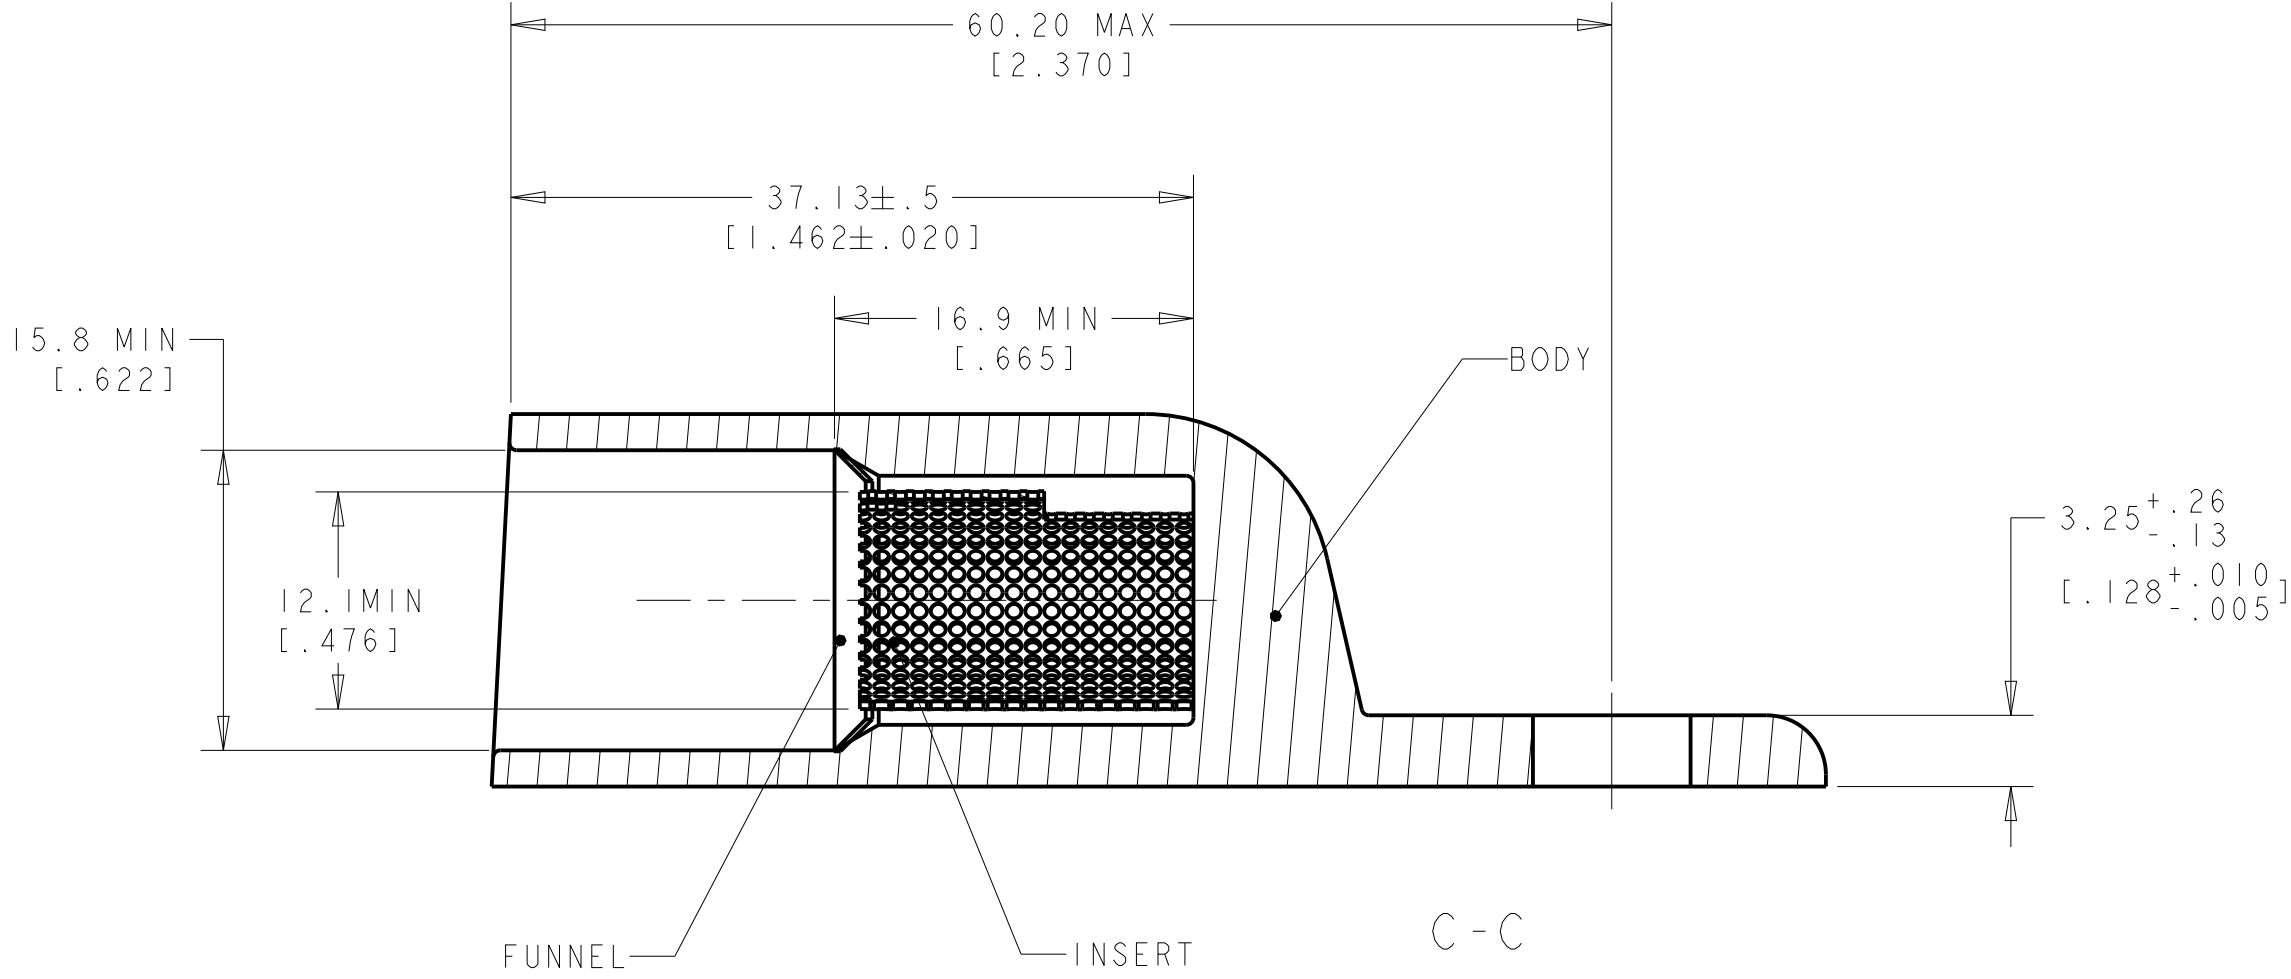

- 1: WIRE INSULATION :12.7[.500]-14.0[.551]
- 2: WIRE CMA: 119500 to 150500
- 3: TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS

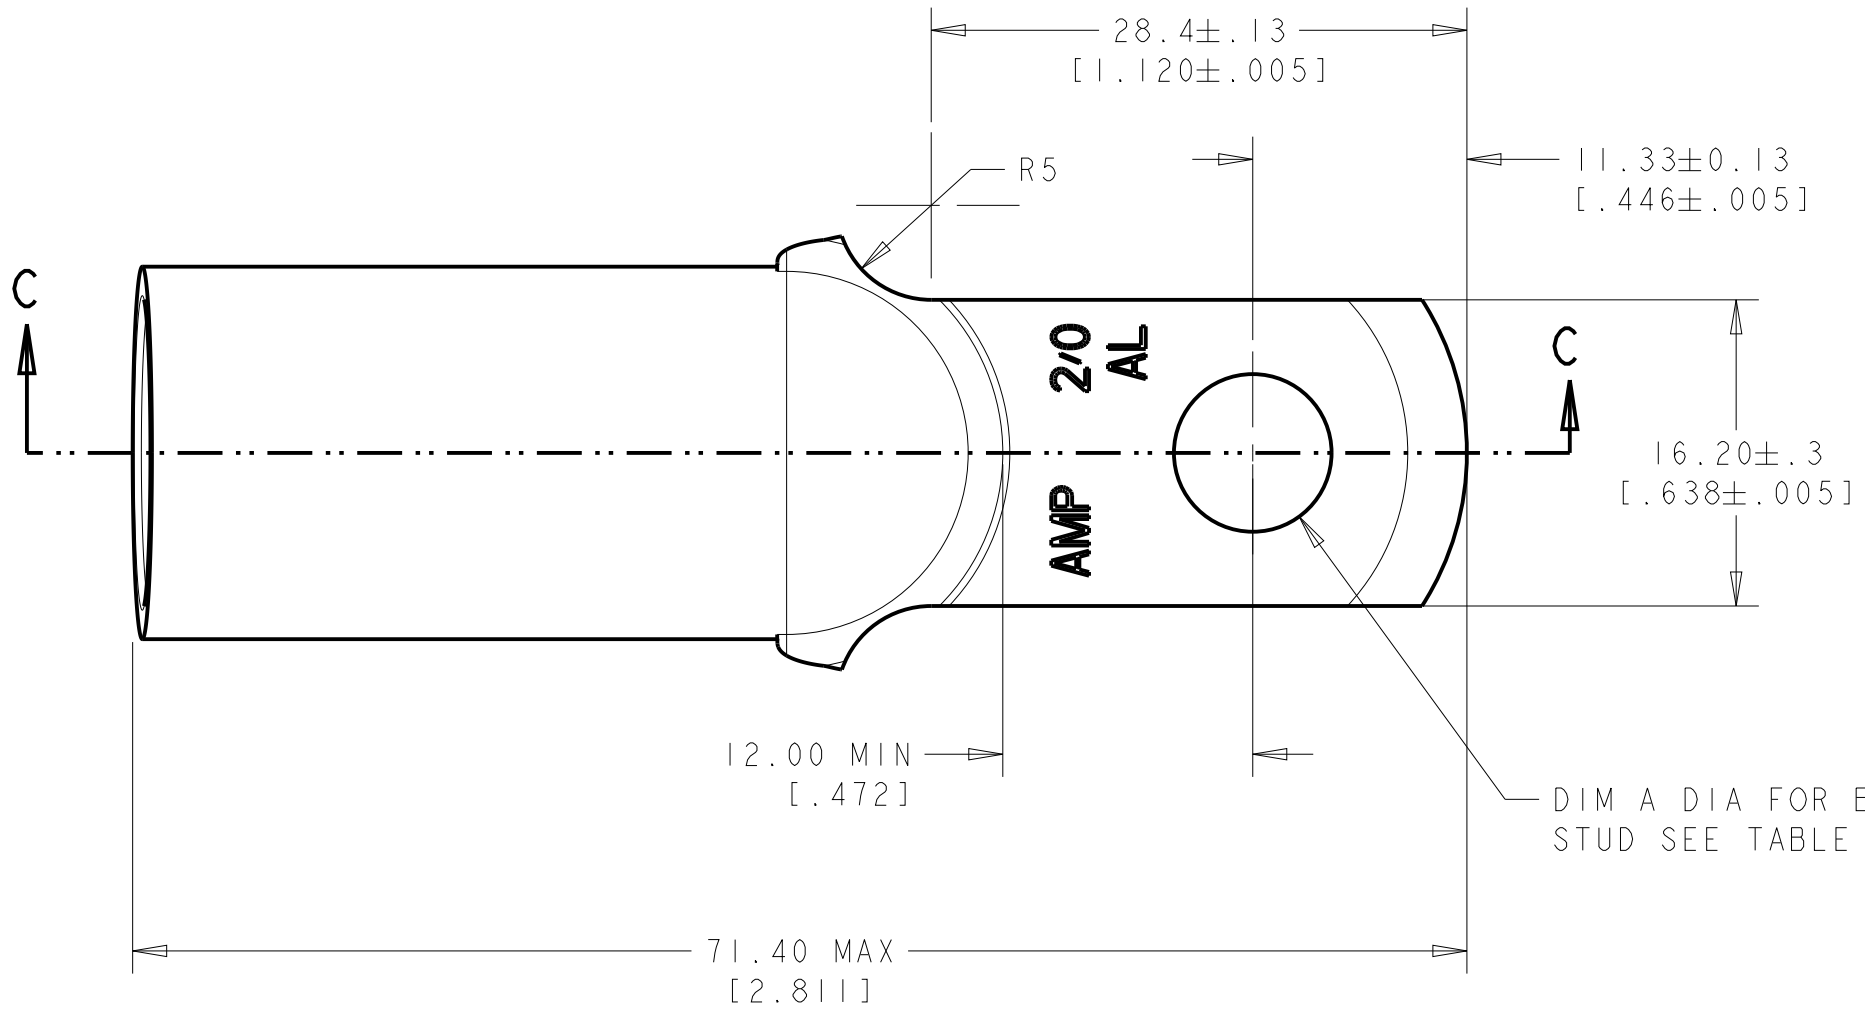

76 grams	8.34±0.04 [.328±.002]	5/6 or M8	BODY: COPPER ASTM B187 ANNEALED TIN PLATE .00381[.000150] MIN THICK PER MIL-T-10727 INSERT&FUNNEL:BRASS ASTM B36 NICKEL PLATE SAE AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	134594-7
WEIGHT	DIM A	B	MATERIAL&FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JJ. DESPRETZ CHK G-ROBERT APVD Y. PETRONIN		24JUN2004		 TE Connectivity	
DIMENSIONS: mm[Inches]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SEALED COPALUM ASSEMBLY			
		0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.13 3 PLC ±- 4 PLC ±- ANGLES ±5 FINISH		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		RESTRICTED TO -	
MATERIAL - -		CUSTOMER DRAWING		SIZE A2	CAGE CODE -	DRAWING NO C=134594	
				SCALE 2:1	SHEET 4 OF 4	REV K	