



Power Schottky Rectifier with common cathode

$$\begin{aligned} I_{FAV} &= 2 \times 20 \text{ A} \\ V_{RRM} &= 60 \text{ V} \\ V_F &= 0.50 \text{ V} \end{aligned}$$

V_{RSM}	V_{RRM}	Type
V	V	
60	60	DSSK 40-006B



TO-247 AD

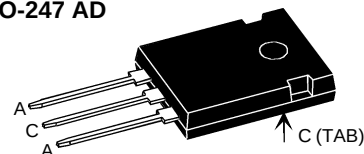

A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		70	A
I_{FAV}	$T_C = 130^\circ\text{C}$; rectangular, $d = 0.5$	20	A
I_{FAV}	$T_C = 130^\circ\text{C}$; rectangular, $d = 0.5$; per device	40	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	500	A
E_{AS}	$I_{AS} = \text{tbd A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	tbd	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	tbd	A
$(dv/dt)_{cr}$		tbd	V/ μs
T_{VJ}		-55...+150	$^\circ\text{C}$
T_{VJM}		150	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	150	W
M_d	mounting torque	0.8...1.2	Nm
Weight	typical	6	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$	20	mA
	$T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$	175	mA
V_F	$I_F = 20 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.50	V
	$I_F = 20 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$	0.53	V
	$I_F = 40 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.60	V
R_{thJC}		1.1	K/W
R_{thCH}	0.25		K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[DSSK40-006B](#)