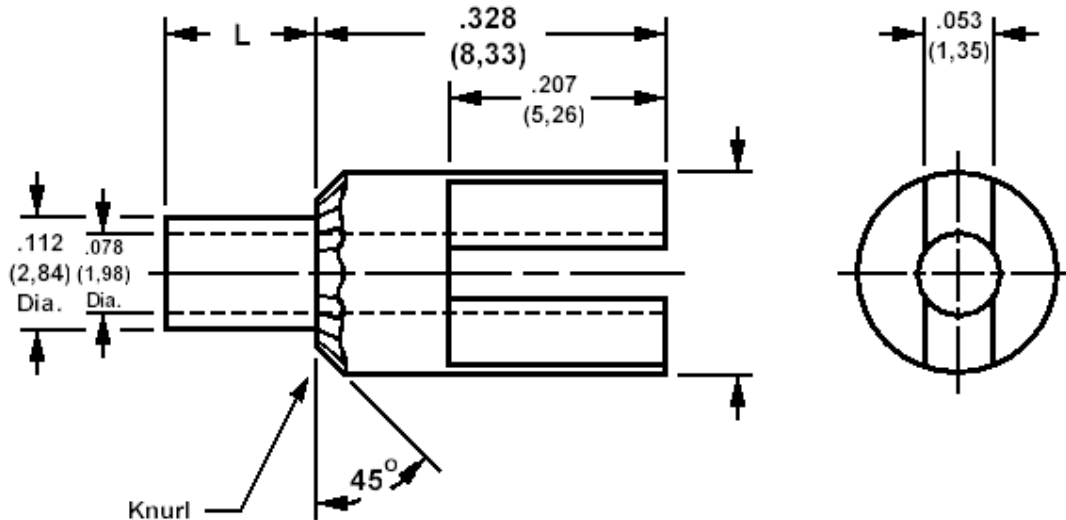


**140-1969 Solder terminal, slotted, thru hole, knurled**

Recommended mounting hole .116 (2,95), #32 drill

**How to order code****140-1969-XX-YY-00**

Basic Part No XX = L dimension, YY = Plating Finish

| DIMENSIONS (XX) |      |             |                 |
|-----------------|------|-------------|-----------------|
| Basic Part No   | (XX) | L           | Board Thickness |
| 140-1969        | -01  | .078 (1,98) | .031 (0,79)     |
|                 | -02  | .109 (2,77) | .062 (1,59)     |
|                 | -03  | .141 (3,58) | .094 (2,38)     |
|                 | -04  | .172 (4,37) | .125 (3,18)     |

| MATERIALS |          |             |                |
|-----------|----------|-------------|----------------|
| Component | Material | Finish (YY) |                |
|           |          | -01         | -05            |
| Terminal  | Brass    | Silver      | Electro Solder |

| SWAGE TOOLING               |                   |
|-----------------------------|-------------------|
| Recommended Swaging Tools:- |                   |
| Anvil                       | 435-6402-01-00-00 |
| Roll punch                  | 435-6601-01-00-00 |
| Flare Punch                 | 435-6663-01-00-00 |