

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 241875

FAN8082 (KA3082N)

Bi-directional DC Motor Driver

Features

- Built-in brake function for stable brake characteristics.
- Built-in element to absorb a surge current derived from changing motor direction and braking motor drive.
- Motor speed control by an external voltage.
- Stable motor direction change.
- Interfaces with CMOS devices.
- Built-in the thermal shut down circuit (165°C).
- Low standby current. (6.5mA)

Description

The FAN8082 is a monolithic integrated circuit designed for driving bi-directional DC motor with braking and speed control, and it is suitable for the loading motor driver of VCR, CDP, and TOY systems. The speed control can be achieved by adjusting the external voltage of the speed control pin. It has two pins of logic inputs for controlling the forward/reverse and braking.

8-DIP-300




Typical Applications

- Compact disk player (CDP) tray or changer
- Low current DC motor such as audio or video equipment.
- General DC motor

Ordering Information

Device	Package	Operating Temp.
FAN8082	8-DIP-300	-25°C ~ +75°C


Pin Assignments

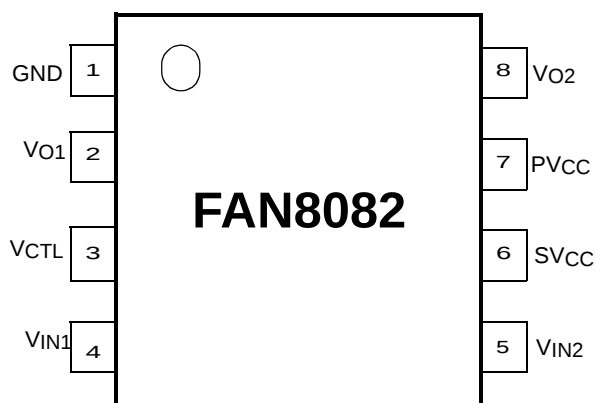

Pin Definitions

Pin Number	Pin Name	I/O	Pin Function Description
1	GND	-	Ground
2	VO1	O	Output 1
3	VCTL	I	Motor speed control
4	VIN1	I	Input 1
5	VIN2	I	Input 2
6	SVCC	-	Supply voltage (Signal)
7	PVCC	-	Supply voltage (Power)
8	VO2	O	Output 2

Internal Block Diagram

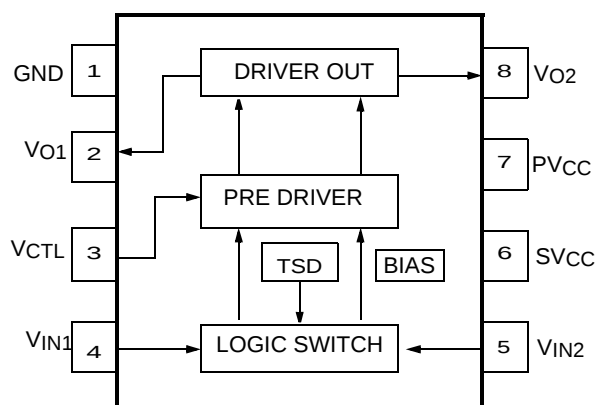

Equivalent Circuit

Description	Pin No.	Internal circuit
Output	2, 8	
Speed control	3	
Input	4, 5	
SVCC PVCC	6 7	


Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Value	Unit	Remark
Supply voltage	VCCmax	18	V	-
Maxium Output current	I _{Omax}	1.6 ^{note1}	A	-
Power dissipation	P _d	1.0 ^{note2}	W	-
Operating temperature	T _{OPR}	-25 ~ +75	°C	-
Storage temperature	T _{STG}	-55 ~ +125	°C	-

NOTES:

1. Duty 1 / 100, pulse width 500μs
2. 1) When mounted on glass epoxy PCB (76.2 × 114 × 1.57mm)
2) Power dissipation reduces 9.6mW / °C for using above Ta=25°C.
- 3) Do not exceed P_d and SOA(Safe Operating Area).

Power Dissipation Curve

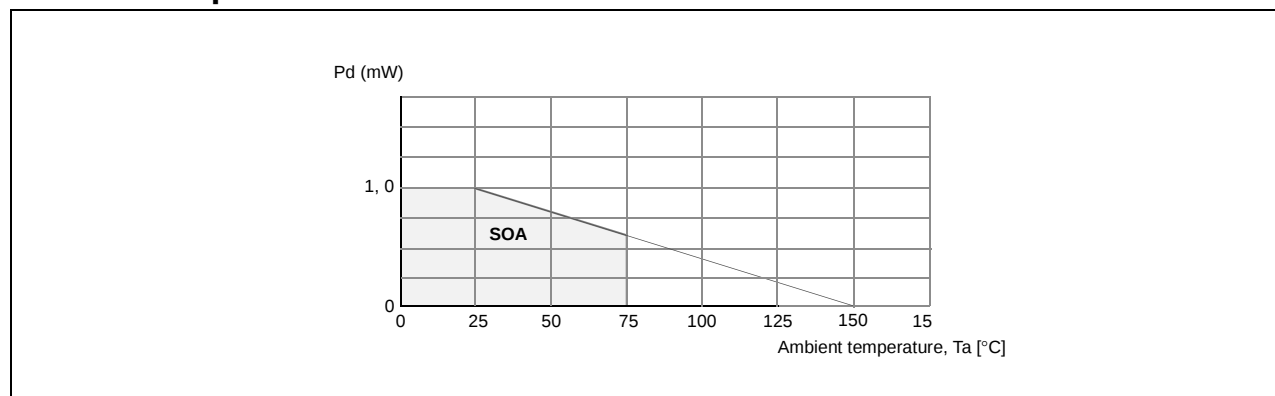

Recommended Operating Conditions (Ta = 25°C)

Parameter	Symbol	Operating voltage range	Unit
Operating supply voltage ^{note}	SVCC, PVCC	7 ~ 18	V

NOTE:

Caution 1) PVCC ≤ SVCC


Caution 2) When PVCC is above 16V, the V_{CTL} must be opened or 8.5 ≤ V_{CTL} ≤ PVCC

Electrical Characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Quiescent current	I _{CC}	Pin4 & 6: GND, R _L =∞	4	6.5	9.5	mA
Min. input-on current 1	I _{IN1}	R _L =∞, Pin4=I _{IN1} , Pin5=L	-	10	30	μA
Min. input-on current 2	I _{IN2}	R _L =∞, Pin4=L, Pin5=I _{IN}	-	10	30	μA
Input threshold voltage 1	V _{ITH1}	R _L =∞, Pin4=V _{IN} , Pin5=L	1.0	1.3	1.6	V
Input threshold voltage 2	V _{ITH2}	R _L =∞, Pin4=L, Pin5=V _{IN}	1.0	1.3	1.6	V
Output leakage current 1	I _{OL1}	R _L =∞, Pin4 & 6=GND	-	0.01	1	mA
Output leakage current 2	I _{OL2}	R _L =∞, Pin4 & 6=GND	-	0.01	1	mA
Zener current 1	I _{Z1}	R _L =∞, Pin4=H, Pin5=L	-	0.85	1.5	mA
Zener current 2	I _{Z2}	R _L =∞, Pin4=L, Pin5=H	-	0.85	1.5	mA
Output voltage 1	V _{O1}	R _L =60Ω, Pin4=H, Pin5=L	6.6	7.2	7.4	V
Output voltage 2	V _{O2}	R _L =60Ω, Pin4=L, Pin5=H	6.6	7.2	7.4	V
Saturation voltage 1 (Upper)	V _{SAT1}	I _O =300mA	-	1.9	2.3	V
Saturation voltage 2 (Upper)	V _{SAT2}	I _O =500mA	-	1.9	2.3	V
Saturation voltage 1 (Lower)	V _{SAT3}	I _O =300mA	-	0.25	0.5	V
Saturation voltage 2 (Lower)	V _{SAT4}	I _O =500mA	-	0.4	0.65	V

Application Information

1. THERMAL SHUT DOWN CIRCUIT

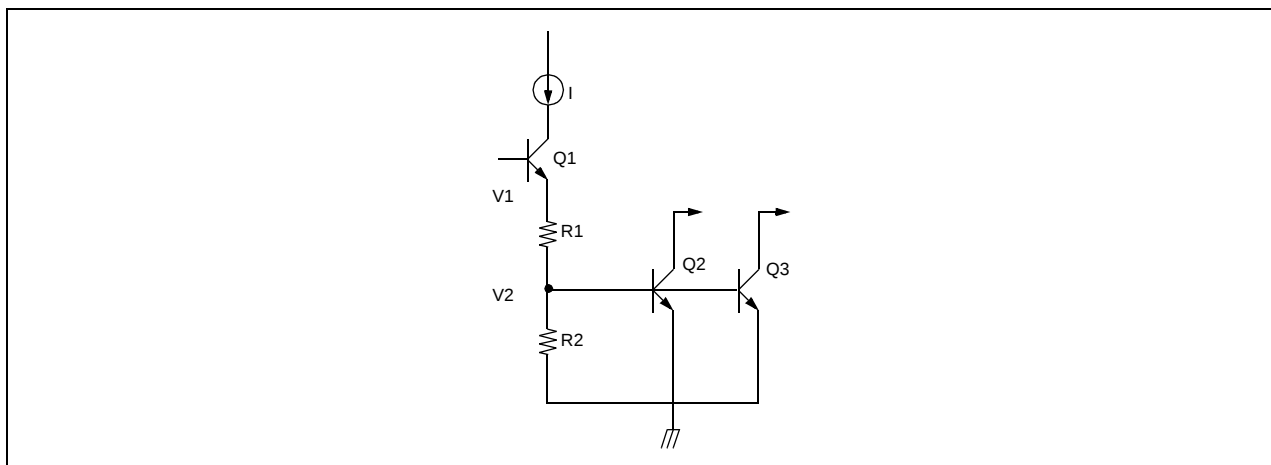

When $T_a = 25^\circ\text{C}$, Q2 & Q3 are Turned-off and output stage operates normally.

$$V_1 = I \times (R_1 + R_2)$$

$$V_2 = R_2 / (R_1 + R_2) \times V_1 = 0.37\text{V}$$

When $T_a = 165^\circ\text{C}$, Q2 & Q3 Turn-on and it turns-off the output stage.

$$0.70\text{V} - 0.37\text{V} = 330\text{mV} \text{ (When Q2 \& Q3 are Turn-on, } V_{beQ2} = V_{beQ3} = 0.70\text{V)}$$

And temperature coefficient of Q2 = Q3 = $-2\text{mV} / ^\circ\text{C}$

$$\therefore \text{T.S.D: } 330\text{mV} / 2\text{mV} = 165^\circ\text{C}$$

2. LOGIC INPUT & OUTPUT TABLE

Input		Output		Motor
Pin #4	Pin #5	Pin #2	Pin #8	
Low	Low	*Low	*Low	Brake
High	Low	High	Low	Forward
Low	High	Low	High	Reverse
High	High	*Low	*Low	Brake


INPUT High is above 2.0V.

INPUT Low is below 0.7V.

*Low : All Power TRs are off-state.

But internal Bias makes output Voltage low state.

3. LOGIC SWITCH CIRCUIT

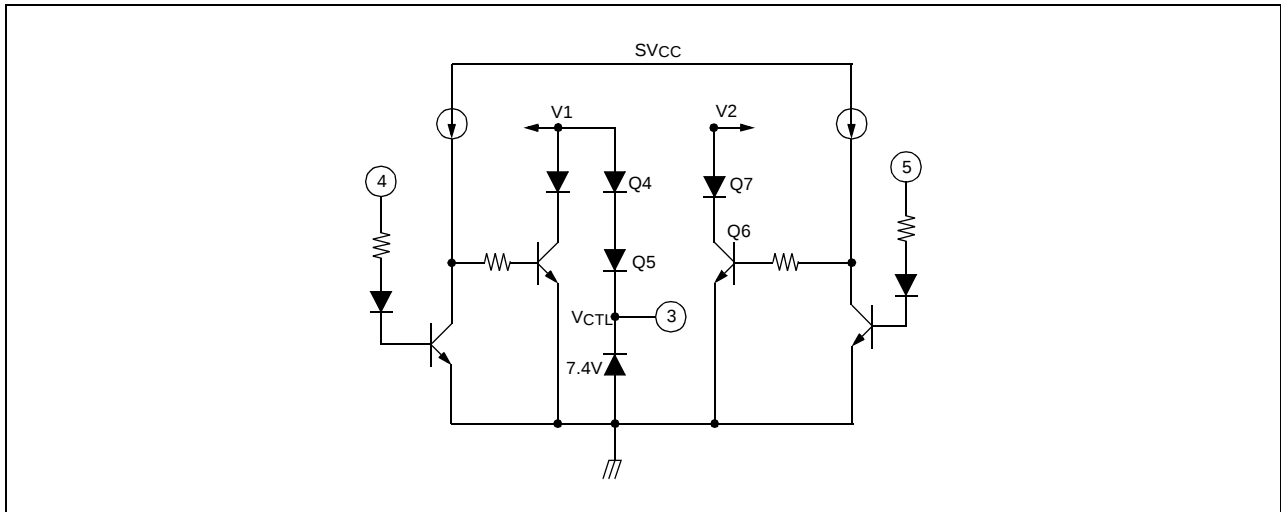


This circuit define reference voltage of output.

When pin #4 is "H" and pin #5 is "L",

- $V1 = V_{zd} + V_{beQ4} + V_{beQ5} \approx 8.9V$
- $V2 = V_{beQ7} + V_{satQ6} \approx 0.87V$

V1 and V2 are related with the output voltage of the motor and change according to the voltage of pin #3 (VCTL).

4. DRIVE OUTPUT CIRCUIT

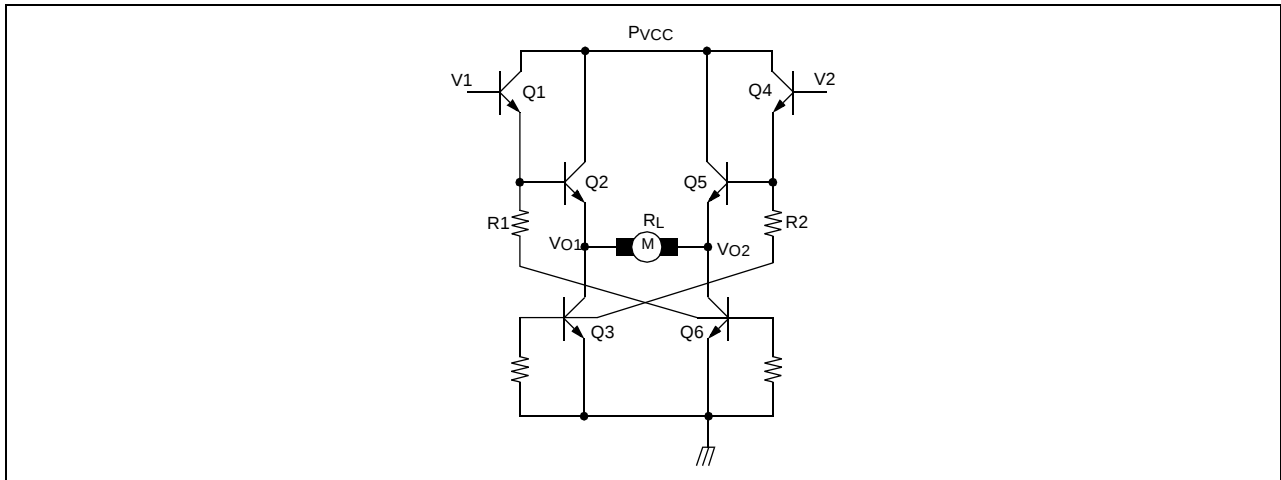

$$V_1 = 8.9V$$

$$V_2 = 0.87V$$

$$V_{O1} = V_1 - V_{BEQ1} - V_{BEQ2}$$

$$V_{O2} = V_{Q6SAT}$$


$$V_O = V_{O1} - V_{O2} = V_1 - V_{BEQ1} - V_{BEQ2} - V_{Q6SAT}$$

$$I_{RL} = (V_{O1} - V_{O2}) / R_L$$


Typical Performance Characteristics

CHARACTERISTIC GRAPHS


1. V_{CC} vs I_{CC}

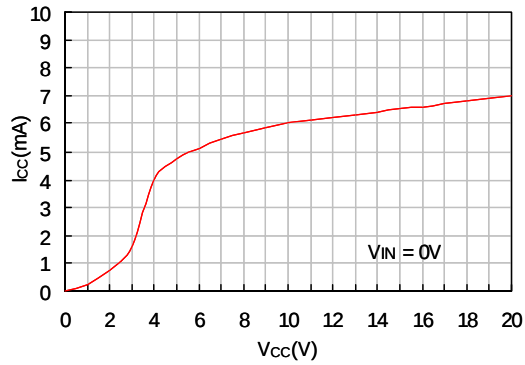


2. Temperature vs I_{CC}

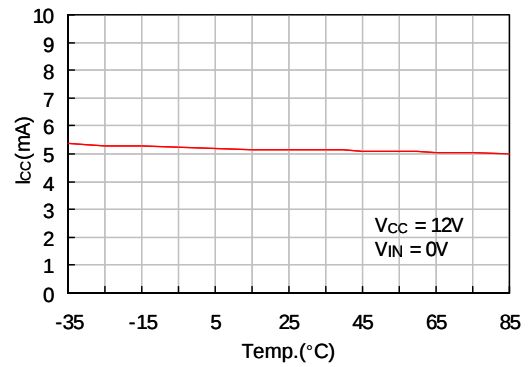


3. V_{CTL} vs. V_o

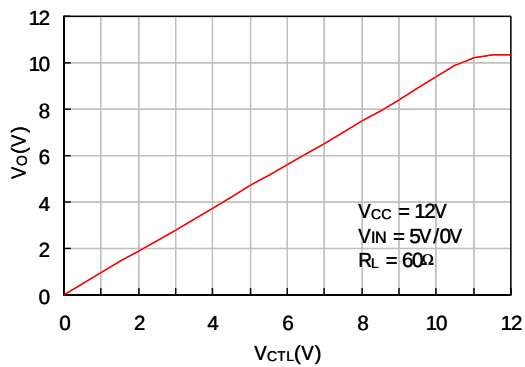


4. Temperature vs. V_o

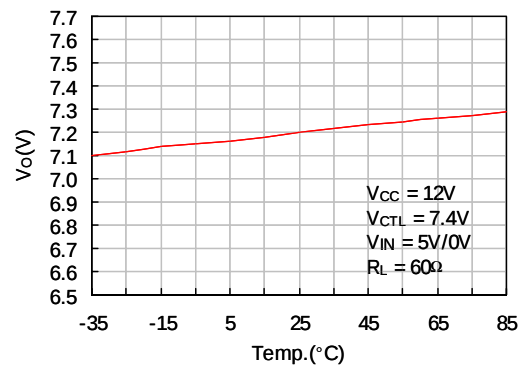


5. I_o vs. $V_{SAT}(UPPER)$

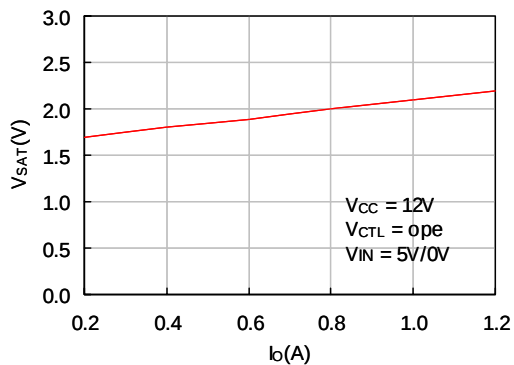


5. I_o vs. $V_{SAT}(LOWER)$

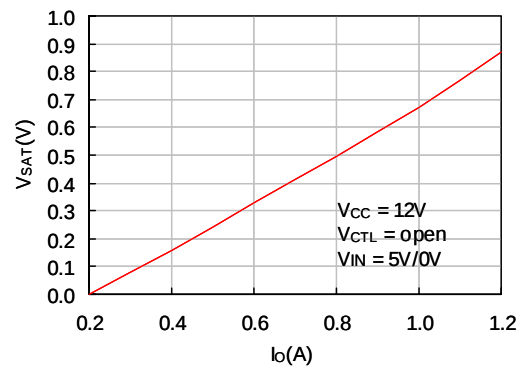

Test Circuits

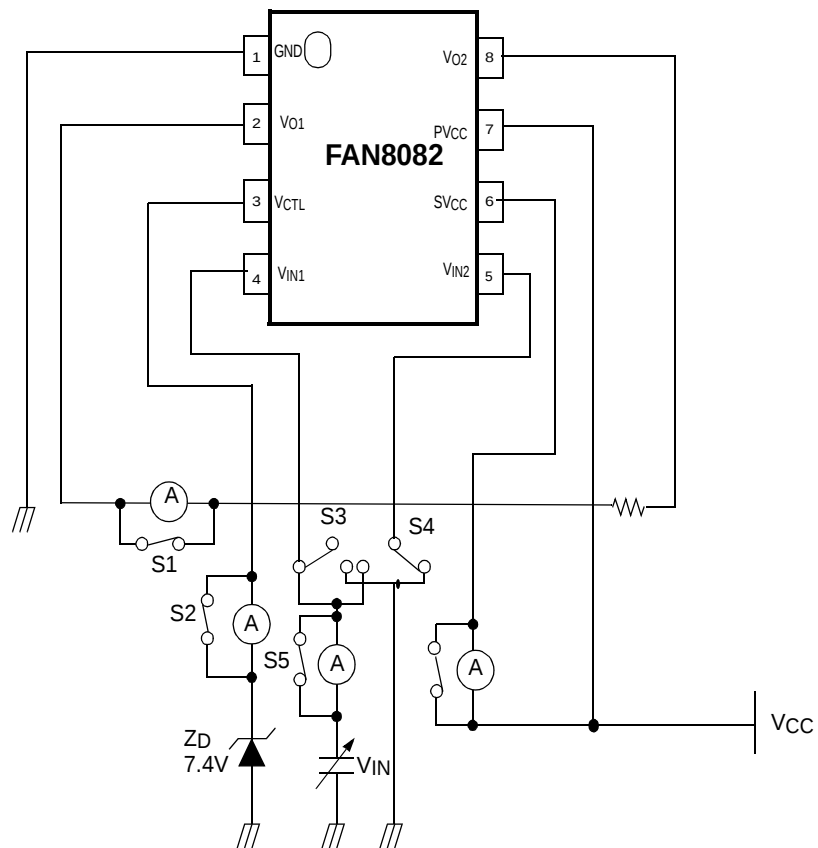

Application Circuits

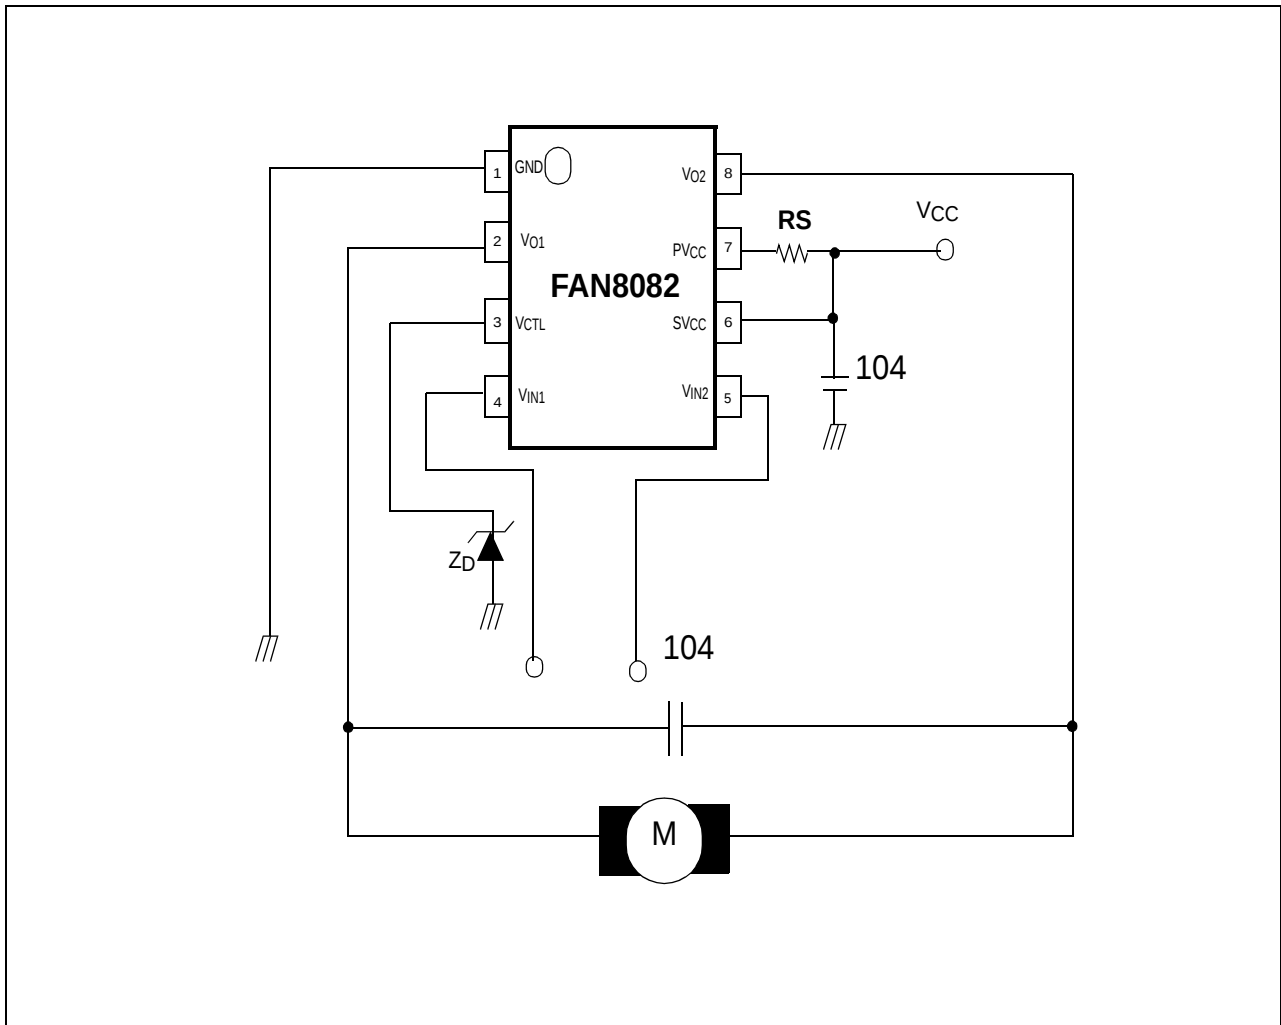

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR INTERNATIONAL. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.