

## 1/2" (12.7 mm) Single - Turn Wirewound Servo Mount Type Precision Potentiometer



### FEATURES

- Ohmic value range: 50 Ω up to 20 kΩ
- Smallest size available: 12.7 mm
- Center Tap on request
- Custom shafts available on request



ELECTRICAL SPECIFICATIONS	
PARAMETER	
Total Resistance	50 Ω to 20 kΩ
Tolerance	± 5 %
Absolute Minimum Resistance	Linearity x Total Resistance or 0.5 Ω, whichever is greater
Linearity (Independent)	± 1.0 %
Noise	100 Ω ENR
Power Rating	2 W at 40 °C ambient derating linearly to zero at 125 °C
Insulation Resistance	1000 MΩ min. 500 V <sub>DC</sub>
Dielectric Strength	1000 V <sub>RMS</sub> , 60 Hz
Electrical Angle	350° + 0° - 4°
End Voltage	Linearity x total applied voltage for total resistance above 20 Ω; 2.0 % of total applied voltage for 20 Ω and below

MATERIAL SPECIFICATIONS	
Shaft	Stainless steel, non magnetic non-passivated
Housing	Aluminum, anodized
Rear Lid	Molded glass filled thermoset plastic
Terminals	Brass, gold plated

ENVIRONMENTAL SPECIFICATIONS	
Vibration	20 G thru 2000 Hz
Shock	50 g
Salt Spray	96 hours
Rotational Life	500 000 Shaft Revolutions
Load Life	900 hours
Temperature Range	- 55 °C to + 125 °C (operating)

ORDERING INFORMATION/DESCRIPTION				
142S	0	0	10K	BO10
MODEL	MECHANICAL OPTIONS	SPECIAL FEATURE	OHMIC VALUE	PACKAGING
	0. Continuous Rotation, Plain Shaft (std.)	0. Standard Torque 1. Center Tap (10K max. Rt)		Box of 10 pieces


SAP PART NUMBERING GUIDELINES				
142S	0	1	502	B10
MODEL	MECHANICAL OPTIONS	SPECIAL FEATURE	OHMIC VALUE	PACKAGING
		1: With Center Tap	502 = 5K	Box of 10 pieces



**1/2" (12.7 mm) Single - Turn Wirewound  
Servo Mount Type Precision Potentiometer**

Vishay Spectrol


**DIMENSIONS** in inches (millimeters)

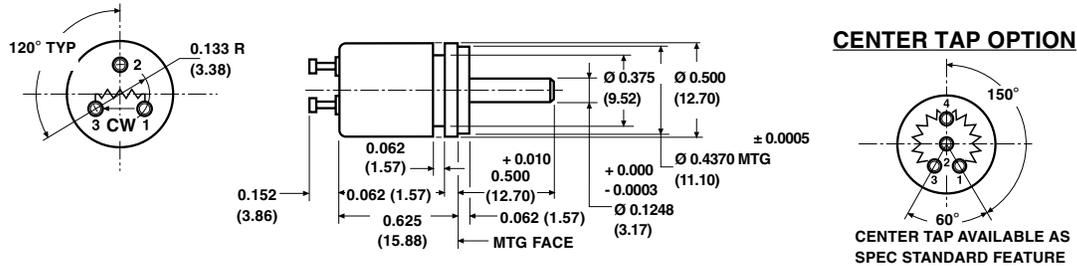

**CENTER TAP OPTION**  
CENTER TAP AVAILABLE AS SPEC STANDARD FEATURE  
**TOLERANCES: UNLESS OTHERWISE NOTED, DECIMALS ± 0.005, ANGLES ± 2°**

<b>MECHANICAL SPECIFICATIONS</b>	
PARAMETER	
Rotation	360° continuous
Bearing Type	<b>BALL BEARING</b>
Torque (Maximums)	
Starting	0.075 oz - in (5.40 g - cm)
Running	0.05 oz - in (3.60 g - cm)
Dead Zone	0.20 oz - in (14.40 g - cm)
Weight	0.3 oz (8.50 g) maximum
Runouts (Maximum)	
Shaft (TIR)	0.002 in (0.05 cm)
Pilot Dia (TIR)	0.002 in (0.05 cm)
Lateral (TIR)	0.002 in (0.05 cm)
Shaft End Play	0.004 in (0.10 cm)
Shaft Radial Play	0.002 in (0.05 cm)

**POWER RATING CHART**

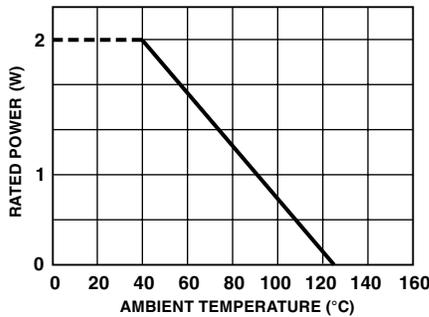

**RESISTANCE ELEMENT DATA**

STD RESISTANCE VALUES (Ω)	RESOLUTION (%)	OHMS PER TURN	MAXIMUM CURRENT AT 40 °C AMBIENT (mA)	MAXIMUM VOLTAGE ACROSS COIL (V)	WIRE TEMP. COEF. (ppm/°C)
50	0.542	0.271	200.0	10.0	20
100	0.431	0.431	141.0	14.1	20
200	0.361	0.722	100.0	20.0	20
500	0.312	1.56	63.2	31.6	20
1K	0.255	2.55	44.7	44.7	20
2K	0.197	3.94	31.6	63.2	20
5K	0.170	8.50	20.0	100.0	20
10K	0.147	14.7	14.1	141.0	20
20K	0.105	21.0	10.0	200.0	20

**MARKING**

<b>Unit Identification</b>	Units shall be marked with manufacturer's name, model number, resistance value & tolerance, circuit diagram, terminal identification, linearity & data code
----------------------------	---



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.