


FFB 127 x 127 x 38 MM SERIES


DIMENSIONS DRAWING

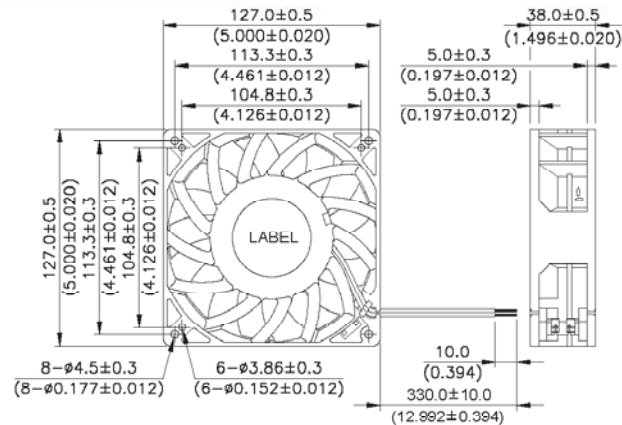


UNIT: mm
(INCH)

- * Bearing Type
Ball Bearings
- * Material
Impeller & Frame : Plastic (UL 94V-0)
- * Lead Wires :
UL 1007 AWG #24 OR Equivalent
Red Wire Positive (+)
Black Wire Negative (-)
- * Weight : 470g (16.58 oz)

P & Q CURVE (AT RATED VOLTAGE)

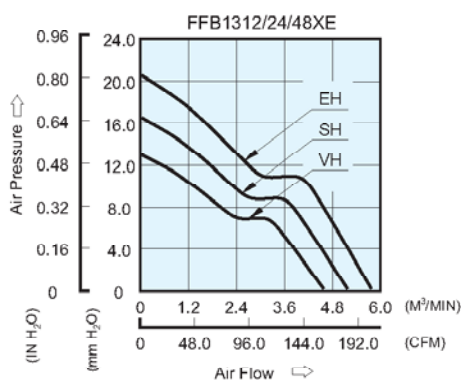

MOUNTING PANEL CUTOUT

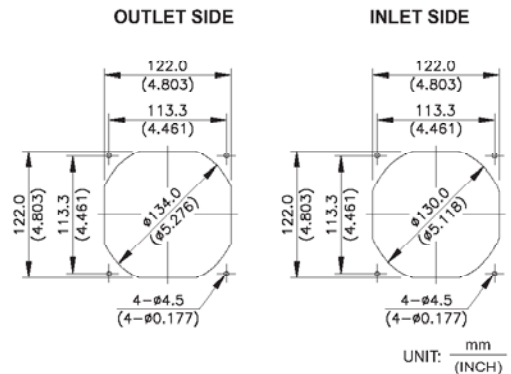

UNIT: mm
(INCH)

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	m³ /min	CFM	mmH₂O	IN H₂O	dB-A
FFB1312VHE	-R00 / -F00	12	7.0 to 13.2	1.32	15.84	3050	4.531	160.01	12.80	0.504	53.0
FFB1324VHE	-R00 / -F00	24	14.0 to 26.4	0.60	14.40						
FFB1348VHE	-R00 / -F00	48	28.0 to 53.0	0.33	15.84						
FFB1312SHE	-R00 / -F00	12	7.0 to 13.2	1.85	22.20	3450	5.097	180.00	16.30	0.642	56.5
FFB1324SHE	-R00 / -F00	24	14.0 to 26.4	0.84	20.16						
FFB1348SHE	-R00 / -F00	48	28.0 to 53.0	0.45	21.60						
FFB1312EHE	-R00 / -F00	12	8.5 to 13.2	2.74	32.88	3850	5.664	200.02	20.30	0.799	59.5
FFB1324EHE	-R00 / -F00	24	14.0 to 26.4	1.20	28.80						
FFB1348EHE	-R00 / -F00	48	28.0 to 53.0	0.67	32.16						

- * Function type is optional.
- * The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
- * Noise is measured in anechoic chamber in free air, one meter from intake side.
- * All readings are typical values at rated voltage.
- * Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta Electronics:

[FFB1312SHE-F00](#) [FFB1348VHE](#) [FFB1348SHE-R00](#) [FFB1324VHE-F00](#) [FFB1312SHE-R00](#) [FFB1324SHE-F00](#)
[FFB1312SHE](#) [FFB1348SHE](#) [FFB1324EHE-R00](#) [FFB1324EHE](#) [FFB1312EHE](#) [FFB1348VHE-R00](#) [FFB1324SHE](#)
[FFB1348EHE-F00](#) [FFB1312VHE-R00](#) [FFB1324SHE-R00](#) [FFB1348VHE-F00](#) [FFB1348EHE-R00](#) [FFB1312VHE-F00](#)
[FFB1324EHE-F00](#) [FFB1312VHE](#) [FFB1312EHE-R00](#) [FFB1348EHE](#) [FFB1324VHE](#) [FFB1312EHE-F00](#) [FFB1324VHE-](#)
[R00](#) [FFB1348SHE-F00](#)