


D


C

B


A

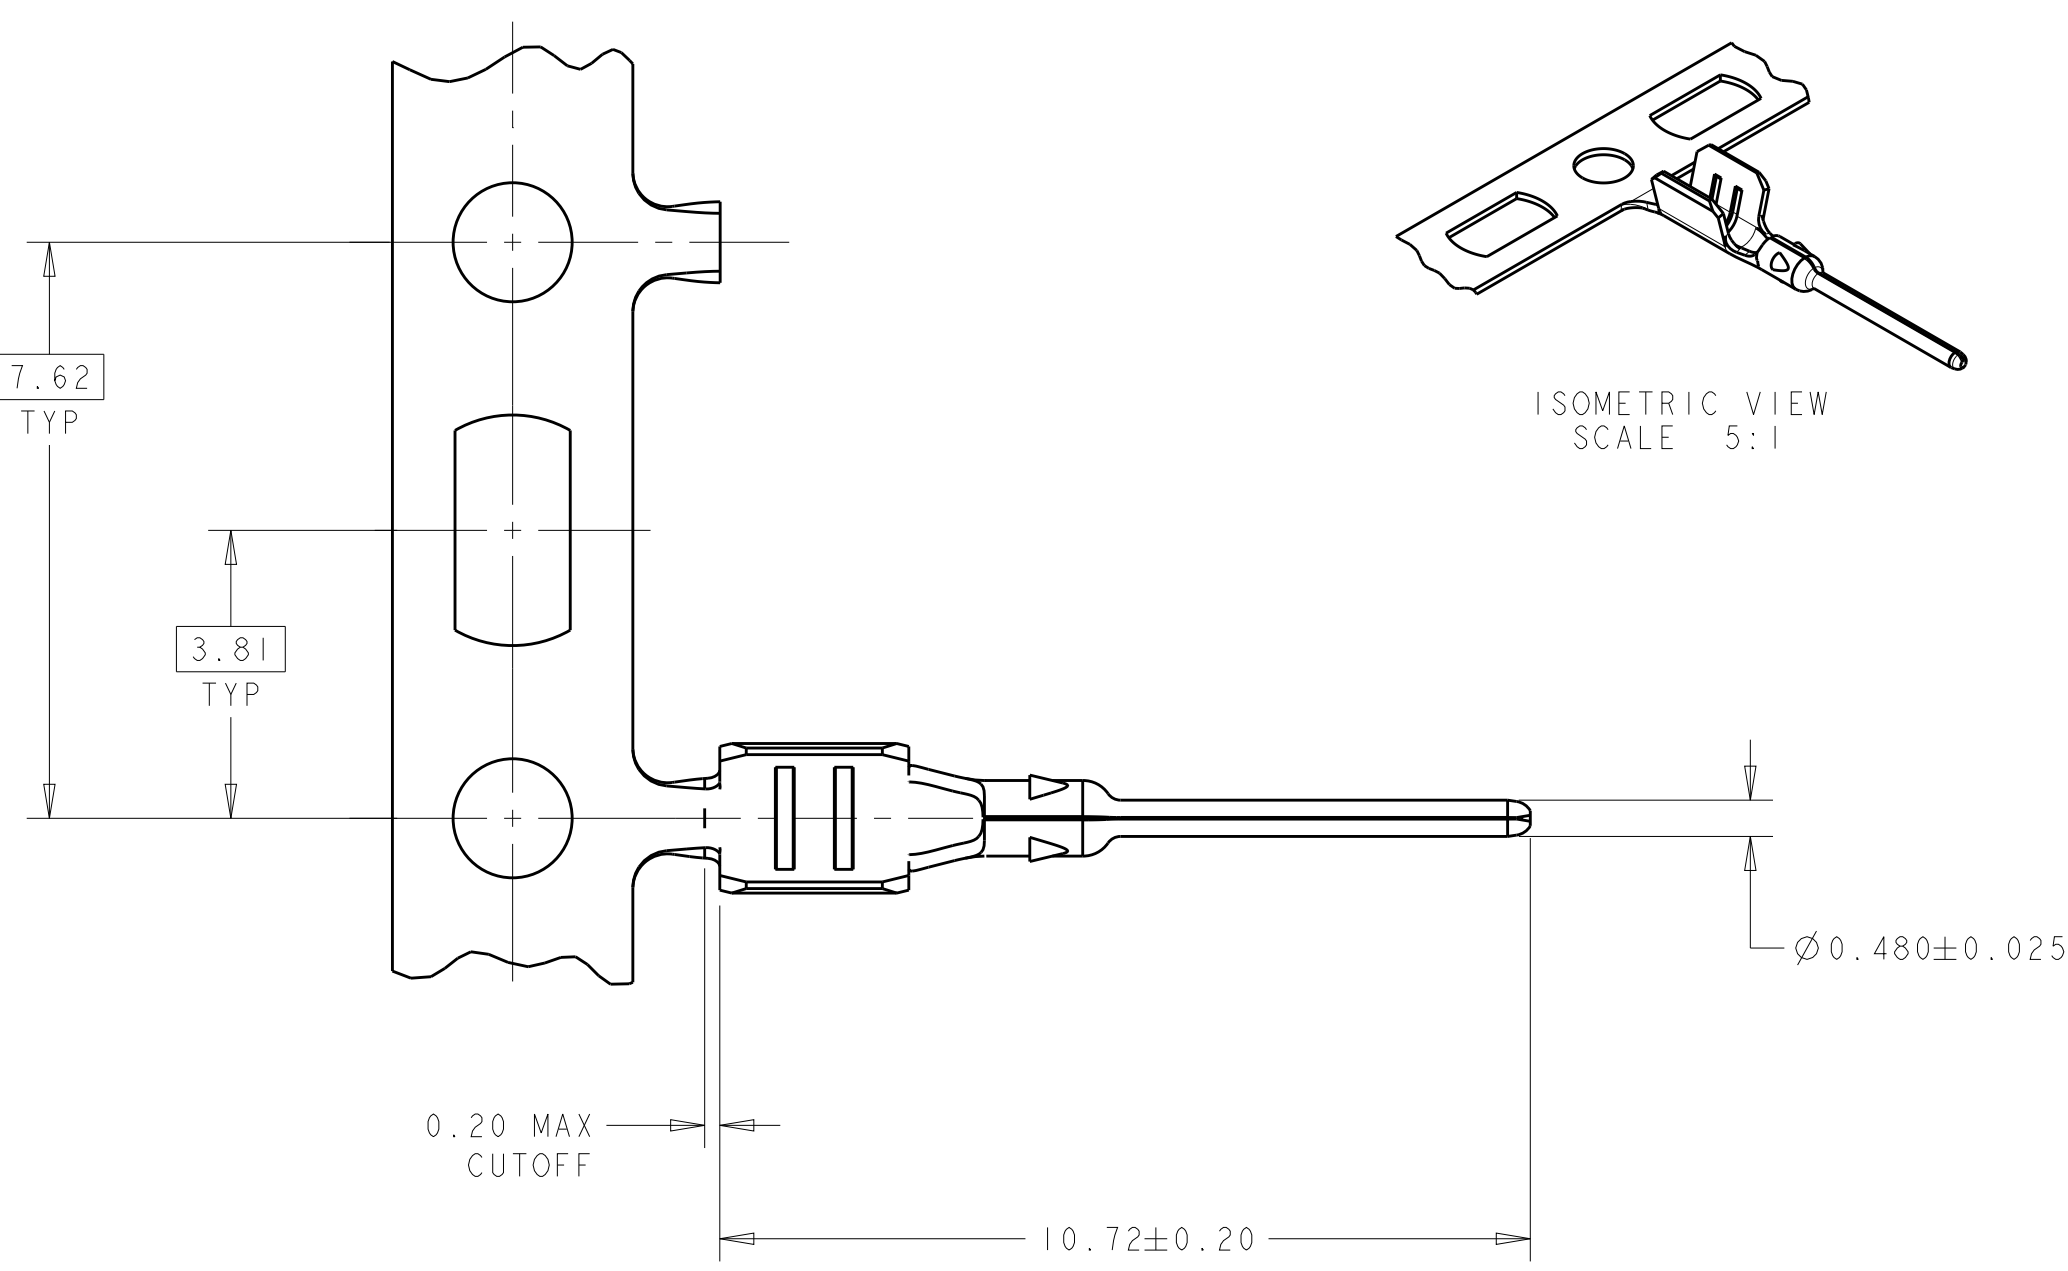

ISOMETRIC VIEW
SCALE 5:1

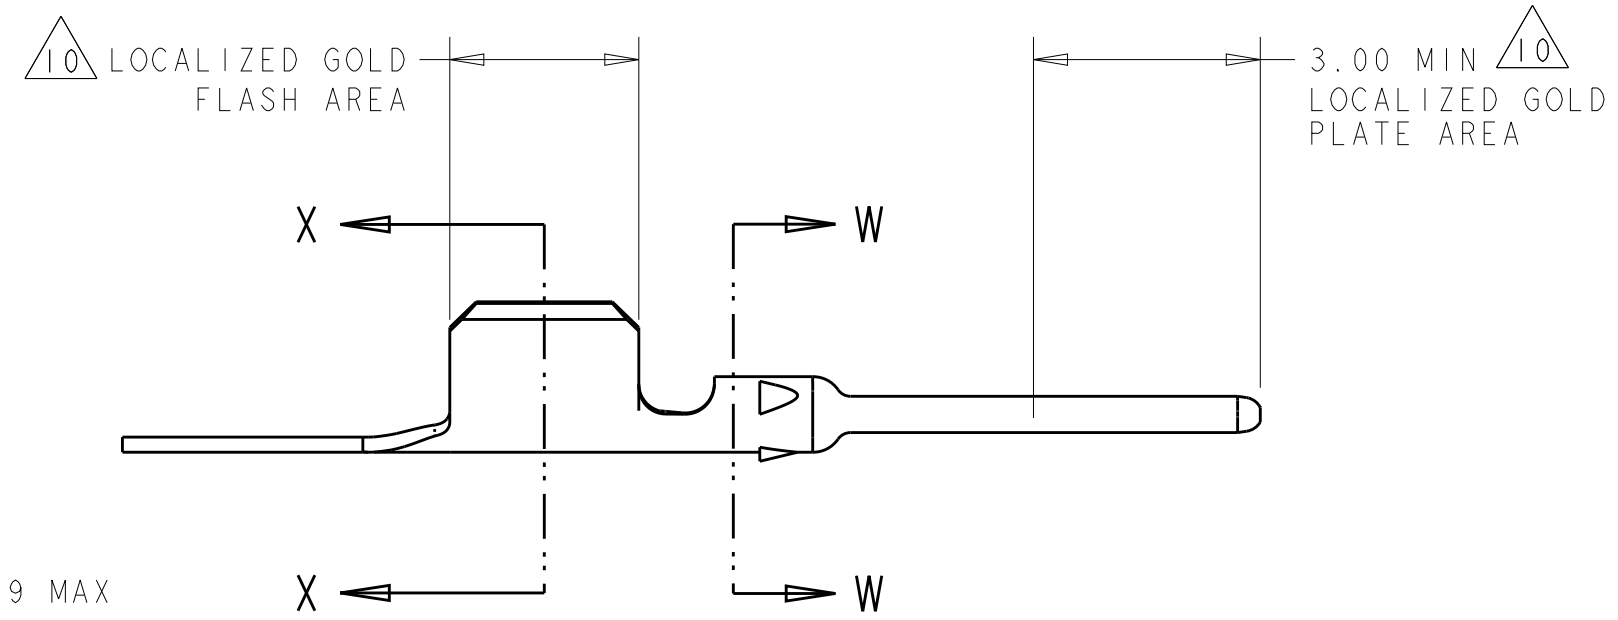


- 1 BRASS.
- 2 NOTE DELETED.
- 3 CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 1385456-3.
- 4 CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 1385675-3.
- 5 NOTE DELETED.
- 6 CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 680900-1 OR 1385623-3-A.
- 7 CRIMP PIN CONTACT USING APPLICATOR PART NUMBER 680901-1 OR 1385624-3.
- 8 NOTE DELETED.
- 9. PIN CONTACT WILL ACCEPT COAXIAL CABLE: SEE TABLE.
- 10 0.76 µm MIN GOLD IN LOCALIZED GOLD PLATE AREA, GOLD FLASH IN LOCALIZED GOLD FLASH AREA, BOTH OVER 2.0 µm MIN NICKEL. GOLD FLASH ALLOWABLE ON ENTIRE PART.

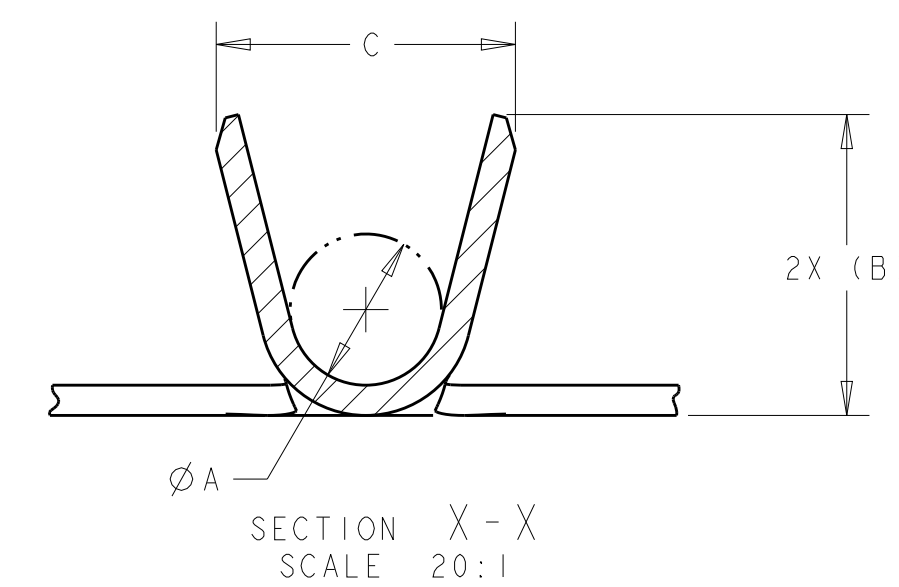

SECTION X-X
SCALE 20:1

SECTION W-W
SCALE 20:1

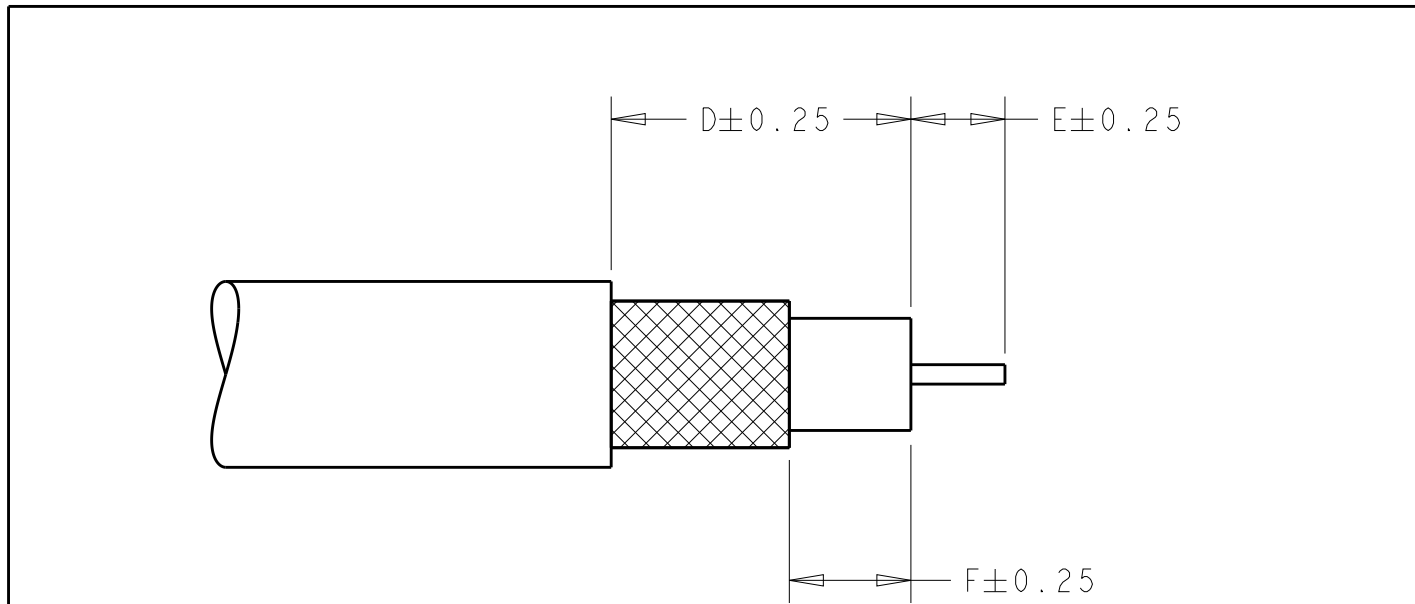

RECOMMENDED STRIP LENGTH DIMENSIONS
SCALE: NTS

4.02	3.11	9.91	1.30	1.22	0.38	RG-179	7	1438890-9	10
3.58	3.55	9.47	1.30	1.22	0.38	RG-62U/M, RG-71U/M	7		
3.58	3.55	9.47	2.03	1.73	0.76	RG-62, RG-71	6		
4.02	3.11	9.91	2.03	1.73	0.76	RG-59, 59 MINI	6	1438890-8	10
4.02	3.11	9.91	2.03	1.73	0.76	RG-174 LL, 1.5D-2VS	4		
4.02	3.11	9.91	2.03	1.73	0.76	RG-316, RG-174	4		
4.02	3.11	9.91	1.98	1.99	1.00	RTK031	6	1438890-7	10
4.02	3.11	9.91	1.98	1.99	1.00	RG-58, RG-58 LL	3		
F	E	D	C	B	A	APPLICABLE CABLE SIZE		PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.J. HARDY
04JAN2005

CHK
J.W. HALL
13JAN2005

APVD
J.W. HALL
13JAN2005

TE Connectivity

PIN CONTACT, JACK, SMB

SIZE
A200779

CAGE CODE
C-1438890

DRAWING NO
114-13157

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
10:1

SHEET
1

OF
1

REV
D3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1438890-9](#)