


High-frequency Relay

G6Z

Miniature 2.6-GHz-Band, SPDT, High-frequency Relay

- Superior high-frequency characteristics include an isolation of 30 dB min., insertion loss of 0.5 dB max., and V.S.W.R. of 1.5 max. at 2.6 GHz.
- Triplate micro stripline technology assures superior high-frequency characteristics.
- Miniature dimensions of 20 x 8.6 x 8.9 mm (L x W x H).
- E-shape or Y-shape terminal options with reverse contact arrangements available, allows greater freedom with PCB design.
- Choose between 75- Ω or 50- Ω impedance models
- RoHS Compliant.

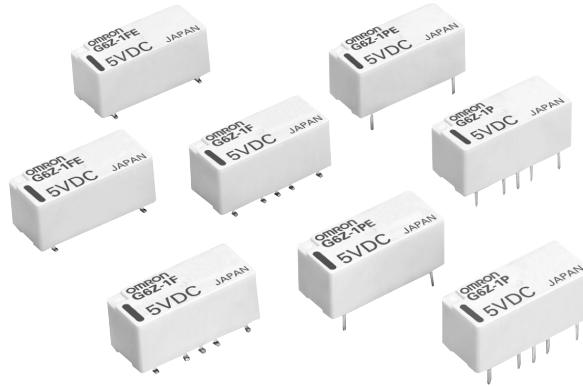

Ordering Information

Classification	Structure	Contact form	Terminal arrangement	Characteristic impedance	Rated coil voltage	Model	
						Through-hole	Surface Mount
Non-latching	Fully sealed	SPDT	E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6Z-1PE	G6Z-1FE
				50 Ω		G6Z-1PE-A	G6Z-1FE-A
			Y-shape	75 Ω		G6Z-1P	G6Z-1F
				50 Ω		G6Z-1P-A	G6Z-1F-A
			E-shape	75 Ω		G6ZU-1PE	G6ZU-1FE
				50 Ω		G6ZU-1PE-A	G6ZU-1FE-A
			Y-shape	75 Ω		G6ZU-1P	G6ZU-1F
				50 Ω		G6ZU-1P-A	G6ZU-1F-A
Single coil latching			E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1PE	G6ZK-1FE
				50 Ω		G6ZK-1PE-A	G6ZK-1FE-A
			Y-shape	75 Ω		G6ZK-1P	G6ZK-1F
				50 Ω		G6ZK-1P-A	G6ZK-1F-A
Dual coil latching			E-shape	75 Ω	3, 4.5, 5, 9, 12, and 24 VDC	G6ZK-1F	G6ZK-1F-A
				50 Ω		G6ZK-1F-A	
			Y-shape	75 Ω			
				50 Ω			

Notes: 1. When ordering, add the rated coil voltage to the model number.

Example: G6Z-1PE-A-DC12

_____ Rated coil voltage

2. When ordering tape packing (surface mount models), add "-TR" to the model number.

Example: G6ZU-1FE-TR-DC12

_____ Tape packing

"-TR" is not part of the relay model number. Therefore, it is not marked on the relay case.

Model Number Legend:

G6Z - - - DC

1 2 3 4 5 6 7

1. Relay Function

None: Non-latching
U: Single coil latching
K: Dual coil latching

4. Terminal Structure

None: Y-shape terminal
E: E-shape terminal

6. Contact arrangement

None: Standard contact arrangement
R: Reverse contact arrangement

2. Contact Form

1: SPDT

5. Characteristic Impedance

None: 75 Ω
A: 50 Ω

7. Rated Coil Voltage

3, 4.5, 5, 9, 12, 24

3. Terminal Shape

F: Surface mount terminals
P: PCB through-hole terminals

Application Examples

These Relays can be used for switching signals in media equipment.

• **Wire communications:**

Cable TV (STB and broadcasting infrastructure), cable modems, and VRS (video response systems)

• **Wireless communications:**

Transceivers, ham radios, ETC, ITS, high-level TV, satellite broadcasting, text multiplex broadcasting, mobile phone stations, TV broadcasting facilities, community antenna systems and car navigation systems

• **Entertainment equipment:**

TVs, video games, satellite radio units,

• **Industrial equipment:**

Measuring equipment, test equipment, and multiplex transmission devices

Specifications

■ Contact Ratings

Load type	Resistive load
Contact Material	Au clad Cu alloy
Rated load	10 mA at 30 VAC; 10 mA at 30 VDC; 10 W at 900 MHz (See note)
Rated carry current	0.5 A
Max. switching voltage	30 VAC, 30 VDC
Max. switching current	0.5 A

Note: This value is for an impedance of 50 Ω or 75 Ω with a V.S.W.R. of 1.2 max.

■ High-frequency Characteristics

Frequency		900 MHz				2.6 GHz							
Terminal type		Through hole		Surface mount		Through hole		Surface mount					
Terminal structure		E-shape	Y-shape	E-shape	Y-shape	E-shape	Y-shape	E-shape	Y-shape				
Isolation	75 Ω	65 dB min.		60 dB min.		35 dB min.	45 dB min.	30 dB min.	40 dB min.				
	50 Ω	60 dB min.											
Insertion loss (not including substrate loss)	75 Ω	0.2 dB max.				0.5 dB max.							
	50 Ω	0.1 dB max.				0.3 dB max.							
V.S.W.R.	75 Ω	1.2 max.				1.5 max.							
	50 Ω	1.1 max.				1.3 max.							
Return loss	75 Ω	20.8 dB max.				14.0 dB max.							
	50 Ω	26.4 dB max.				17.7 dB max.							
Maximum carry power		10 W (See note 2)											
Maximum switching power		10 W (See note 2)											

Note: 1. The above values are initial values.

2. These values are for an impedance of 50 Ω or 75 Ω with a V.S.W.R. of 1.2 max.

■ Coil Ratings

Non-latching, Standard and Reverse-contact Models G6Z-1P(E), G6Z-1F(E)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (VDC)	Must dropout voltage (VDC)	Maximum voltage (VDC)	Power consumption (mW)
3	66.7	45	75% max. of rated voltage	10% min. of rated voltage	150% of rated voltage	Approx. 200
4.5	44.4	101				
5	40.0	125				
9	22.2	405				
12	16.7	720				
24	8.3	2,880				

Single Coil Latching Models G6ZU-1P(E), G6ZU-1F(E)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Must set voltage (VDC)	Must reset voltage (VDC)	Maximum voltage (VDC)	Power consumption (mW)
3	66.7	45	75% max. of rated voltage	75% max. of rated voltage	150% of rated voltage	Approx. 200
4.5	44.4	101				
5	40.0	125				
9	22.2	405				
12	16.7	720				
24	8.3	2,880				

Dual Coil Latching Models G6ZK-1P(E), G6ZK-1F(E)

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Must set voltage (VDC)	Must reset voltage (VDC)	Maximum voltage (VDC)	Power consumption (mW)
3	120	25	75% max. of rated voltage	75% max. of rated voltage	150% of rated voltage	Approx. 360
4.5	80	56				
5	72	69				
9	40	225				
12	30	400				
24	15	1,600				

Note:

1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.
2. The operating characteristics are measured at a coil temperature of 23°C.
3. The maximum voltage is the highest voltage that can be imposed on the relay coil instantaneously.
4. The voltage measurements for operate/release and set/reset are the values obtained for instantaneous changes in the voltage (rectangular wave).

Characteristics


Item	Non-latching models	Single coil latching models	Dual coil latching models		
	G6Z-1P(E), G6Z-1F(E)	G6ZU-1P(E), G6ZU-1F(E)	G6ZK-1P(E), G6ZK-1F(E)		
Contact resistance (See note 2)	100 mΩ max.				
Operating (set) time (See note 3)	10 ms max. (approx. 3.5 ms)	10 ms max. (approx. 2.5 ms)			
Release (reset) time (See note 3)	10 ms max. (approx. 2.5 ms)				
Set/reset time	---	12 ms			
Insulation resistance (See note 4)	100 MΩ min. (at 500 VDC)				
Dielectric strength	Coil and contacts	1,000 VAC, 50/60 Hz for 1 min.			
	Coil and ground, contacts and ground	500 VAC, 50/60 Hz for 1 min.			
	Contacts of same polarity	500 VAC, 50/60 Hz for 1 min.			
Vibration resistance	Mechanical durability	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)			
	Malfunction durability	10 to 55 to 10 Hz, 0.75-mm single amplitude (1.5-mm double amplitude)			
Shock resistance	Mechanical durability	1,000 m/s ²			
	Malfunction durability	500 m/s ²			
Service life	Mechanical	1,000,000 operations min. (at 36,000 operations/hour)			
	Electrical	300,000 operations min. (30 VAC, 10 mA/30 VDC, 10 mA), 100,000 operations min. (900 MHz, 10 W) at a switching frequency of 1,800 operations/hour			
Ambient temperature	Operating: -40°C to 70°C (with no icing or condensation)				
Ambient humidity	Operating: 5% to 85% RH				
Weight	Approx. 2.8 g				

Note: 1. The above values are initial values.


2. The contact resistance was measured with 10 mA at 1 VDC with a voltage drop method.
3. Values in parentheses are typical values.
4. The insulation resistance was measured with a 500-VDC megohmmeter applied to the same parts as those used for checking the dielectric strength.

Engineering Data


Ambient Temperature vs. Maximum Voltage

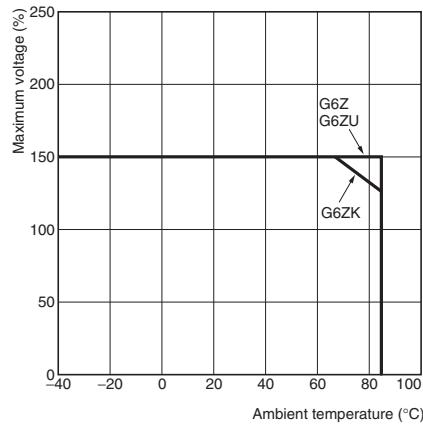

Ambient Temperature vs. Must Operate or Must Release Voltage

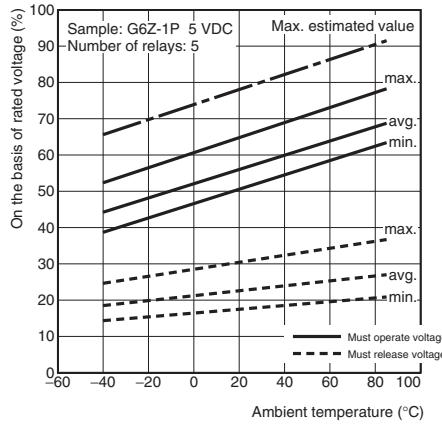


Shock Malfunction

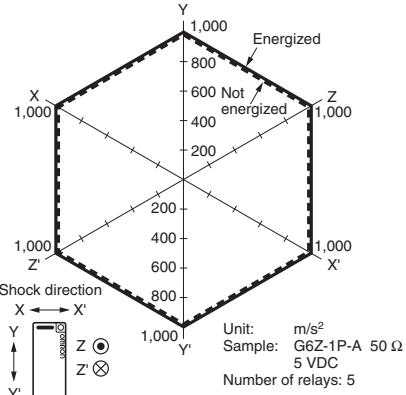


Conditions: Shock is applied in $\pm X$, $\pm Y$, and $\pm Z$ directions three times each with and without energizing the Relays to check for contact malfunctions.


Electrical Endurance (with Must Operate and Must Release Voltage)

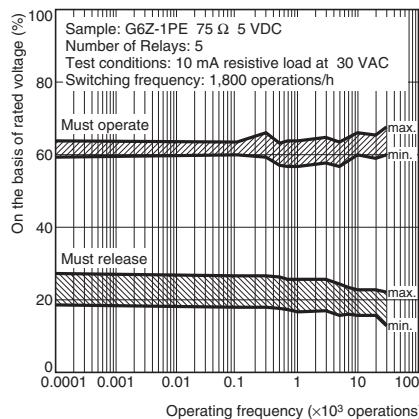


Electrical Endurance (with Must Operate and Must Release Voltage)

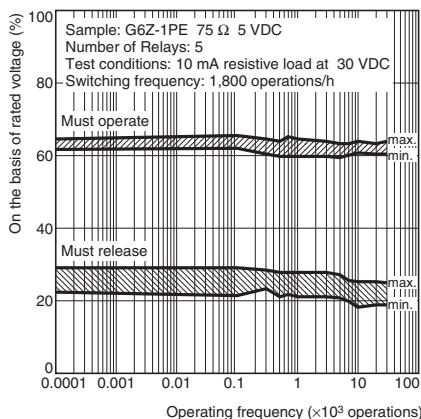


Electrical Endurance (Contact Resistance)

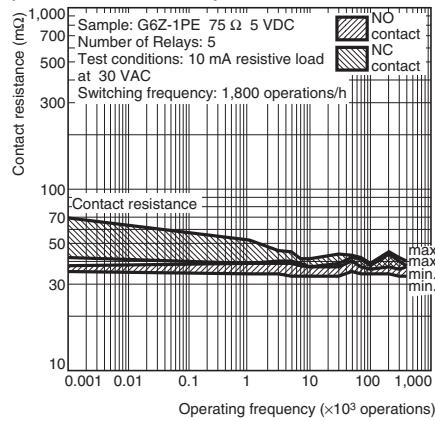


Electrical Endurance (Contact Resistance)

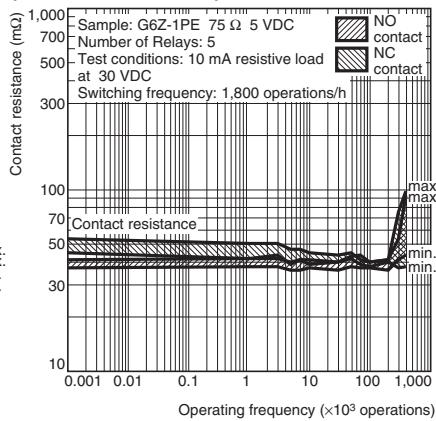


External Magnetic Interference (Average value)

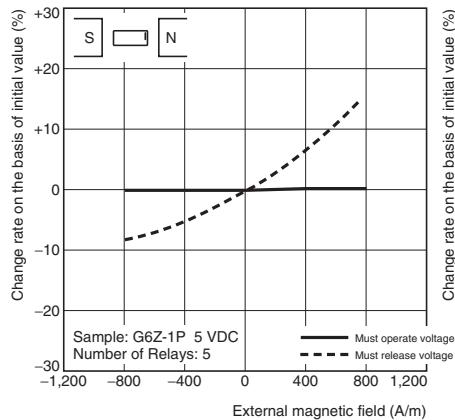

(Average value)








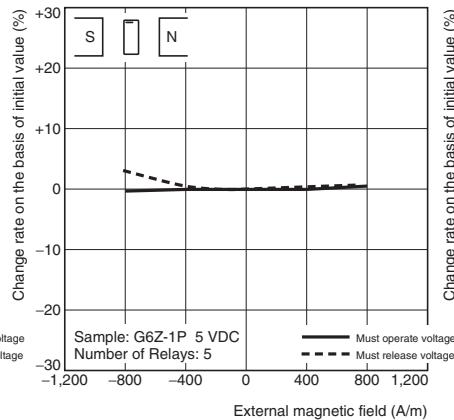


(Average value)

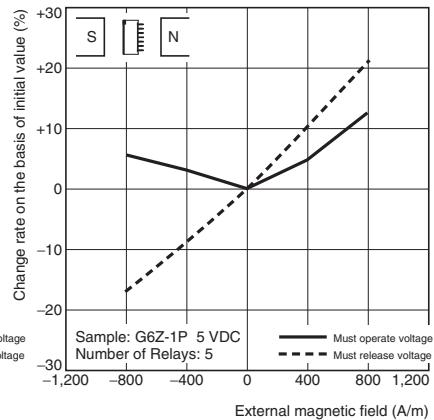

Note: 1. The tests were conducted at an ambient temperature of 23°C.

2. The contact resistance data are periodically measured reference values and are not values from monitoring each operation. Contact resistance values will vary according to the switching frequency and operating environment, so be sure to check operation under the actual operating conditions before use.

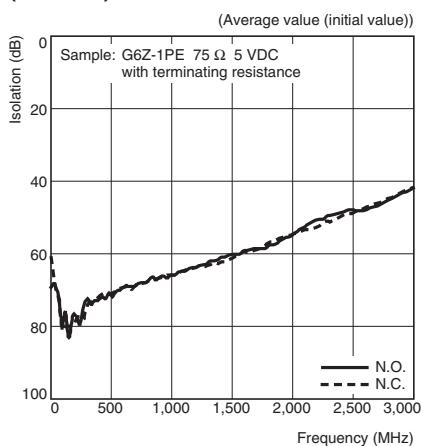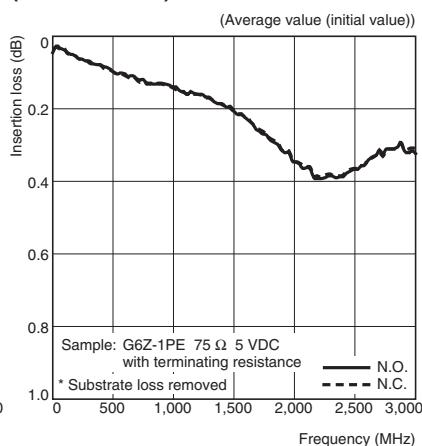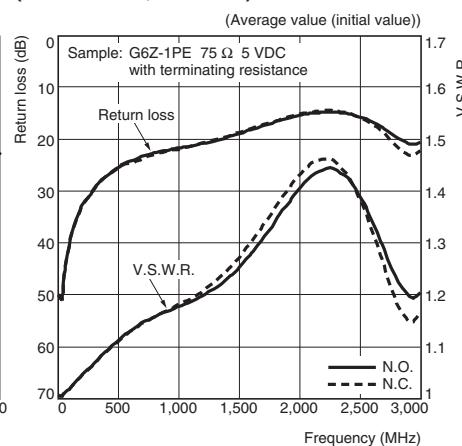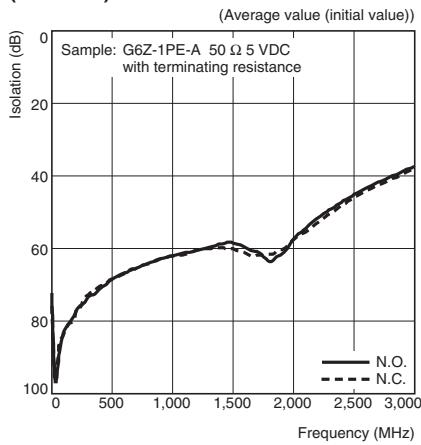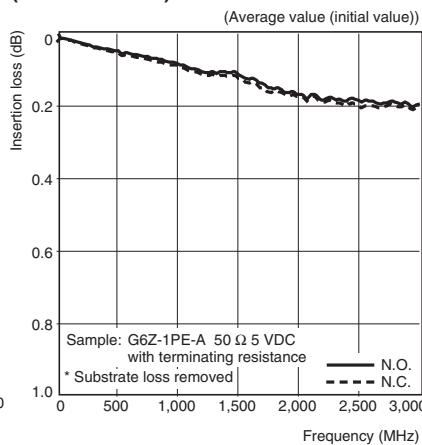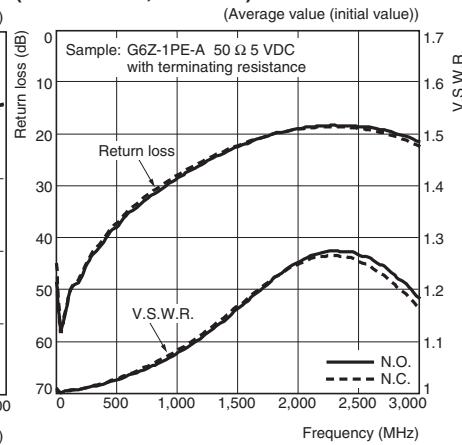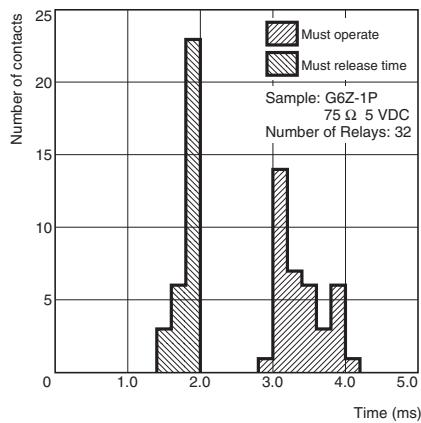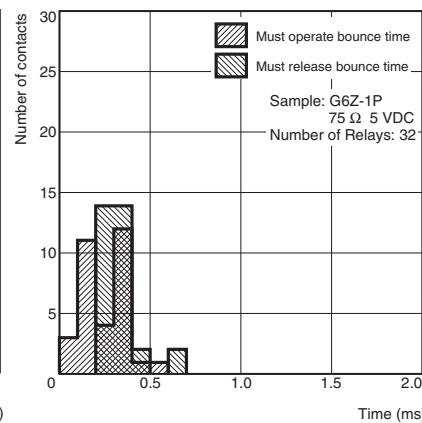High-frequency Characteristics at 75 Ω (Isolation)**High-frequency Characteristics at 75 Ω (Insertion Loss)****High-frequency Characteristics at 75 Ω (Return Loss, V.S.W.R.)****High-frequency Characteristics at 50 Ω (Isolation)****High-frequency Characteristics at 50 Ω (Insertion Loss)****High-frequency Characteristics at 50 Ω (Return Loss, V.S.W.R.)****Must Operate and Must Release Time Distribution (See note.)****Must Operate and Must Release Bounce Time Distribution (See note.)**

Note: 1. The tests were conducted at an ambient temperature of 23°C.


2. High-frequency characteristics depend upon the PCB to which the relay is mounted. Always check these characteristics, including endurance (service life), in the actual machine before use.

Dimensions


Note: All units are in millimeters unless otherwise indicated.

■ PCB Through-hole Terminal Types


G6Z-1PE
G6Z-1PE-R
G6ZU-1PE

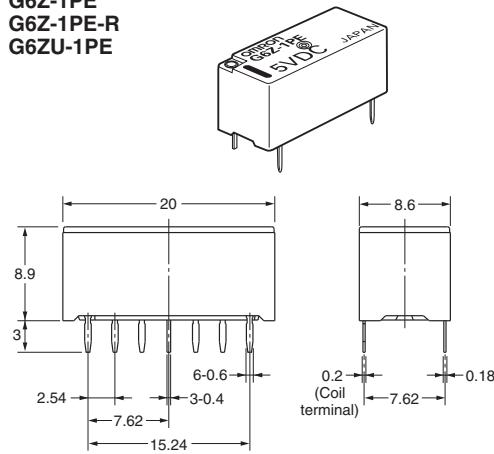

Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mm

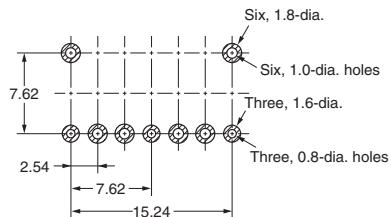


Terminal Arrangement/Internal Connections (Bottom View)
G6Z-1PE

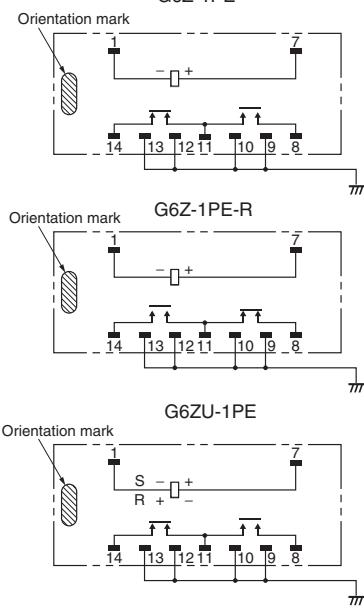


Note: Each value has a tolerance of ± 0.3 mm.


G6Z-1PE-A
G6ZU-1PE-A

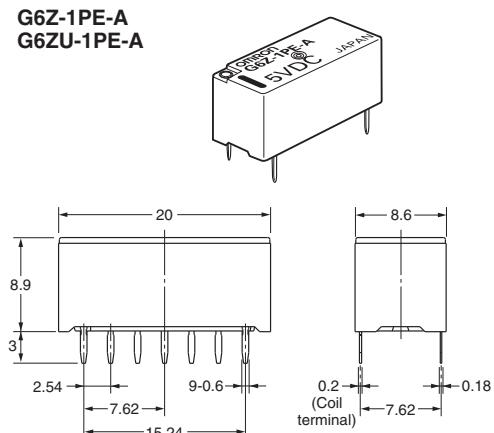



Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mm

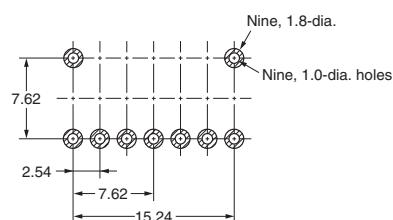





Terminal Arrangement/Internal Connections (Bottom View)
G6Z-1PE-A

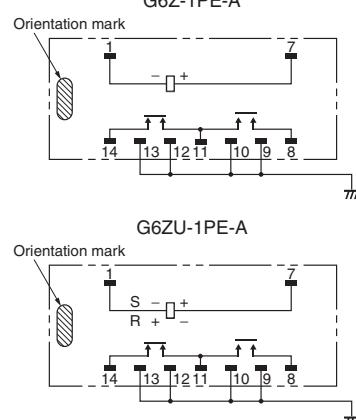



Note: Each value has a tolerance of ± 0.3 mm.

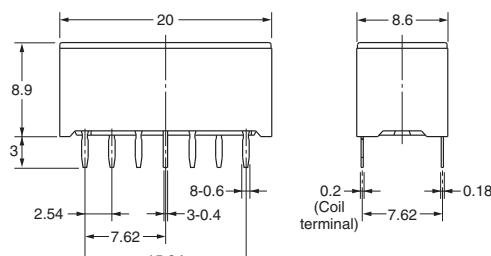G6Z-1P
G6ZU-1P



Note: Each value has a tolerance of ± 0.3 mm.

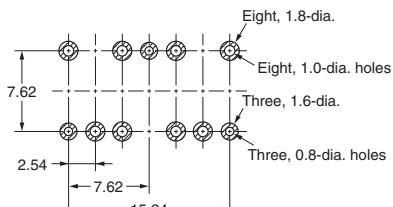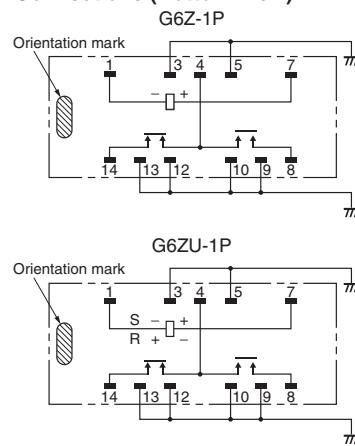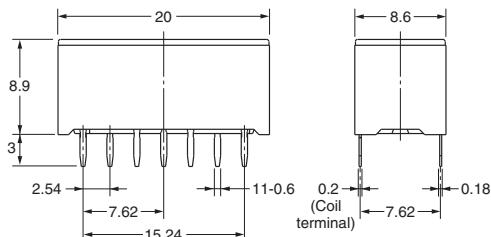Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mmTerminal Arrangement/Internal
Connections (Bottom View)G6Z-1P-A
G6ZU-1P-A



Note: Each value has a tolerance of ± 0.3 mm.

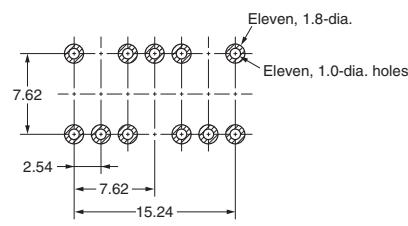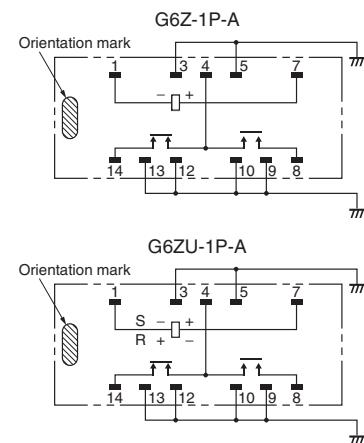Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mmTerminal Arrangement/Internal
Connections (Bottom View)


G6ZK-1PE

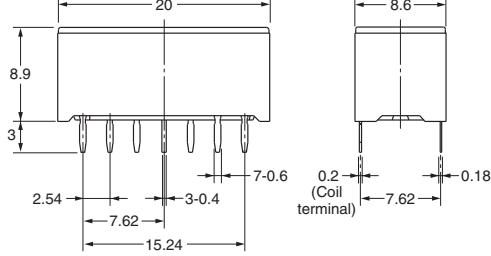


Note: Each value has a tolerance of ± 0.3 mm.

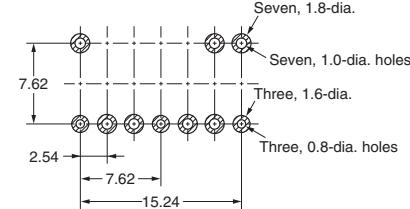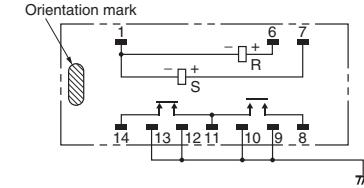Mounting Dimensions (Bottom View)
Tolerance: ± 0.1 mmTerminal Arrangement/Internal
Connections (Bottom View)


G6ZK-1PE-A

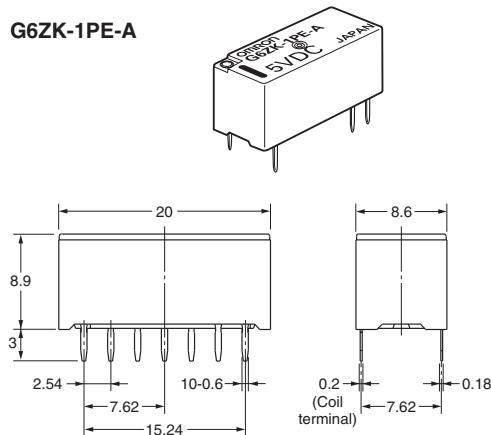


Mounting Dimensions (Bottom View)

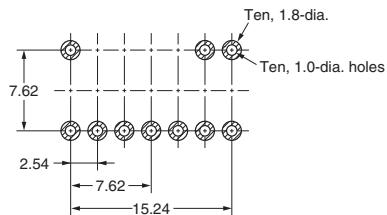Tolerance: ± 0.1 mm


Terminal Arrangement/Internal Connections (Bottom View)

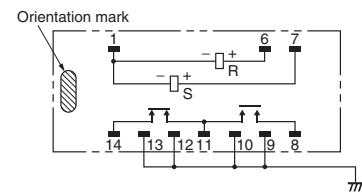Note: Each value has a tolerance of ± 0.3 mm.


G6ZK-1P

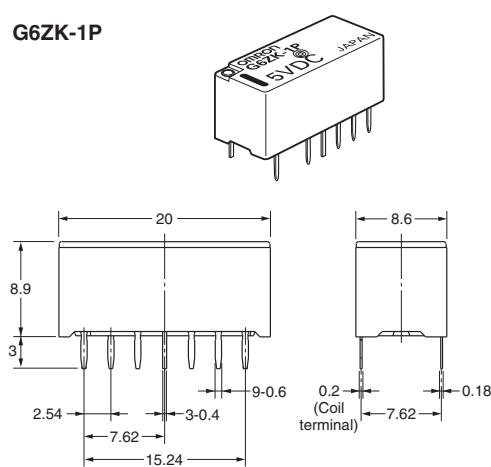


Mounting Dimensions (Bottom View)

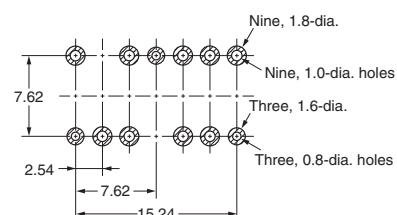Tolerance: ± 0.1 mm


Terminal Arrangement/Internal Connections (Bottom View)

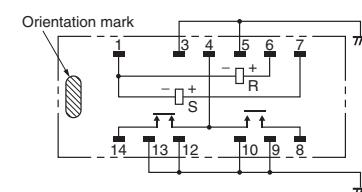Note: Each value has a tolerance of ± 0.3 mm.


G6ZK-1P-A

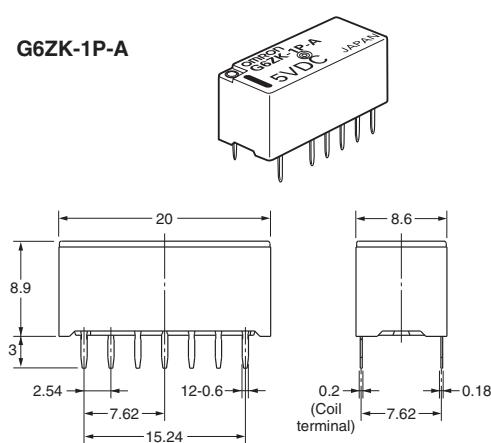

Mounting Dimensions (Bottom View)

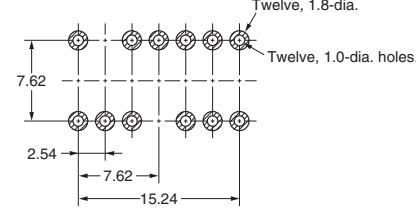
Tolerance: ± 0.1 mm

Terminal Arrangement/Internal Connections (Bottom View)

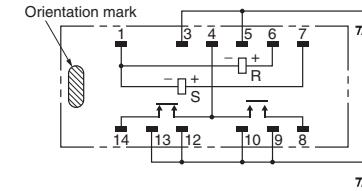
Note: Each value has a tolerance of ± 0.3 mm.

■ Surface Mount Terminal Types



G6Z-1FE
G6ZU-1FE

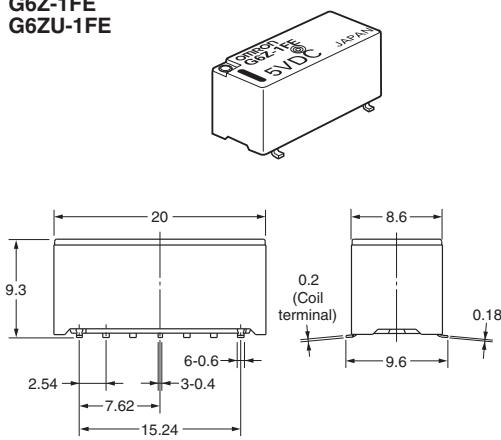

Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm

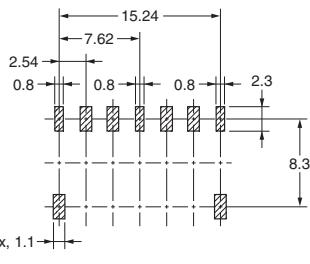


Terminal Arrangement/Internal
Connections (Top View)

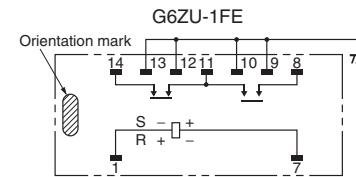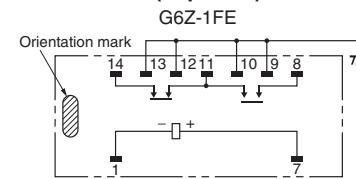


Note 1: Each value has a tolerance of ± 0.3 mm.

2: The coplanarity of the terminals is 0.1 mm max.



G6Z-1FE-A
G6ZU-1FE-A

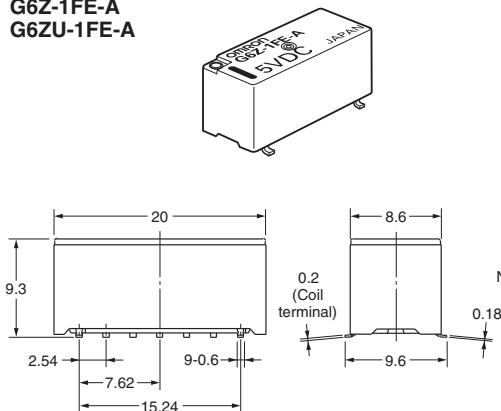

Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm

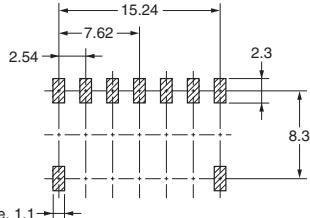


Terminal Arrangement/Internal
Connections (Top View)

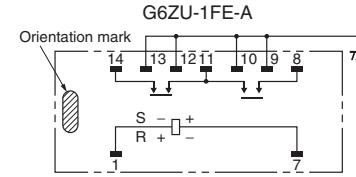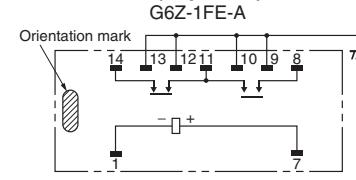


Note 1: Each value has a tolerance of ± 0.3 mm.

2: The coplanarity of the terminals is 0.1 mm max.



G6Z-1F
G6ZU-1F

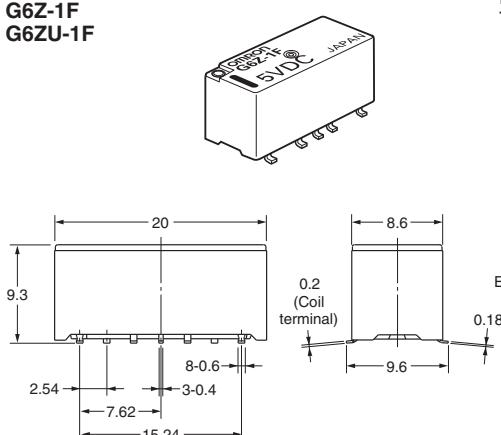

Mounting Dimensions (Top View)
Tolerance: ± 0.1 mm

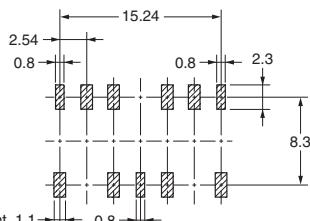



Terminal Arrangement/Internal
Connections (Top View)

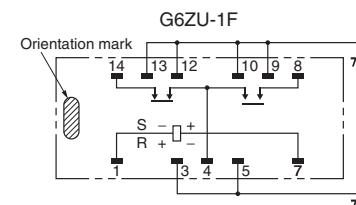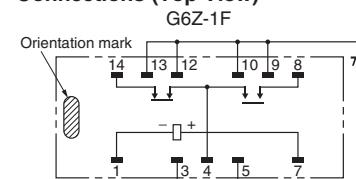


Note 1: Each value has a tolerance of ± 0.3 mm.

2: The coplanarity of the terminals is 0.1 mm max.


G6ZK-1F

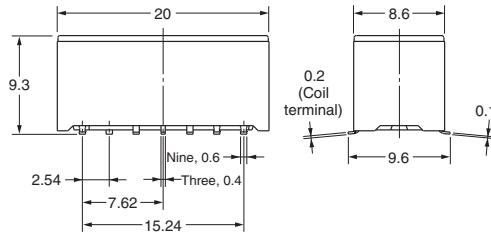



Mounting Dimensions (Top View)

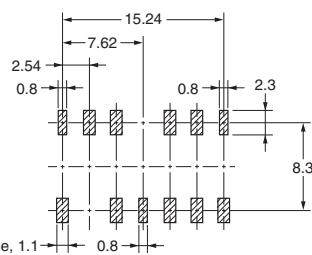Tolerance: ± 0.1 mm


Terminal Arrangement/Internal Connections (Top View)

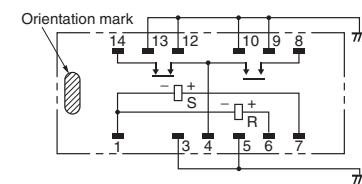**Note 1:** Each value has a tolerance of ± 0.3 mm.**2:** The coplanarity of the terminals is 0.1 mm max.


G6ZK-1F-A

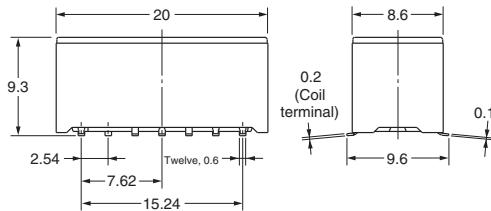

Mounting Dimensions (Top View)

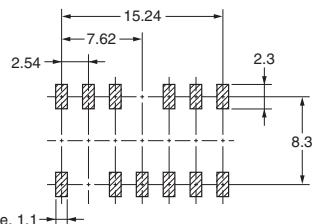Tolerance: ± 0.1 mm

Terminal Arrangement/Internal Connections (Top View)

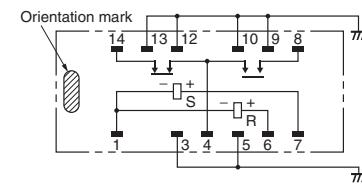
**Note 1:** Each value has a tolerance of ± 0.3 mm.**2:** The coplanarity of the terminals is 0.1 mm max.

Packaging

1. Tube Packaging

Relays in tube packaging are arranged so that the orientation mark of each Relay is on the left side.

Be sure not to make mistakes in Relay orientation when mounting the Relay to the PCB.

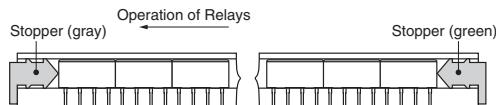

Tube length: 530 mm (stopper not included)


No. of Relays per tube: 25

2. Tape and Reel Packaging (Surface mount Terminal Models)

When ordering Relays in tape packing, add the prefix “-TR” to the model number, otherwise the Relays in stick packing will be provided.

Relays per Reel: 300


Direction of Relay Insertion

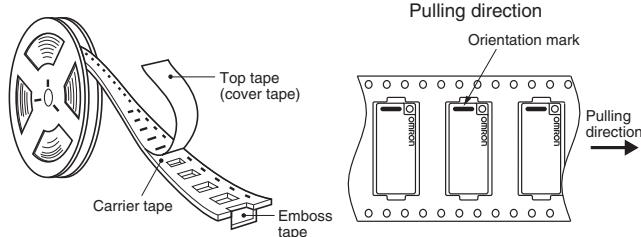


Recommended Soldering Method

■ Temperature Conditions for IRS Method


When using reflow soldering, ensure that the Relay terminals and the top of the case stay below the following curve. Check that these conditions are actually satisfied before soldering the terminals.

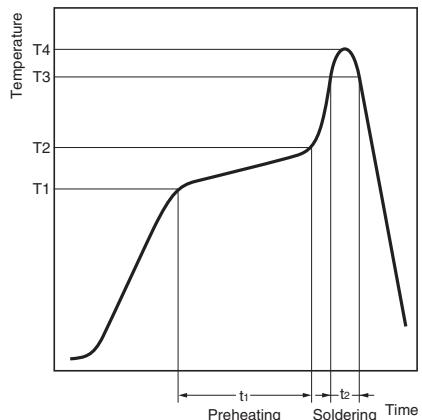

Reel Dimensions

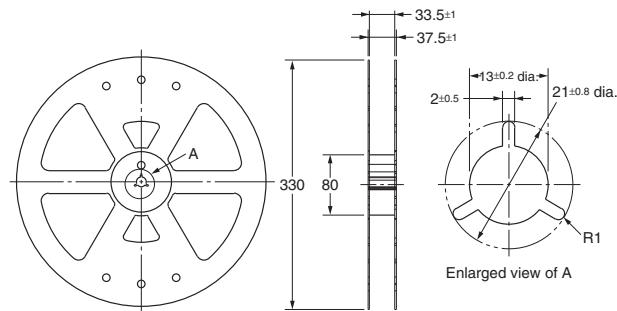

Carrier Tape Dimensions

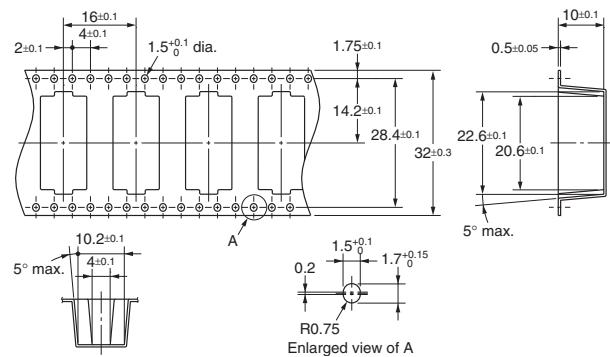


Note: The radius of the unmarked corner is 0.3 mm.


Do not quench the terminals after mounting. Clean the Relay using alcohol or water no hotter than 40°C max.

The thickness of cream solder to be applied should be between 150 and 200 µm on OMRON's recommended PCB pattern.

Correct Soldering



Incorrect Soldering

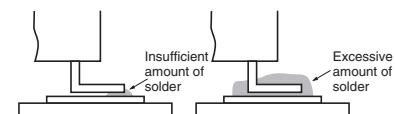


Check the soldering in the actual mounting conditions before use.

Measured part	Preheating (T1 → T2, t1)	Soldering (T3, t2)	Maximum peak (T4)
Terminals	150 → 180°C, 120 s max.	230°C min, 30 s max.	250°C max.
Top of case	---	---	255°C max.

Claw Securing Force During Automatic Mounting

During automatic insertion of Relays, be sure to set the securing force of each claw to the following so that the Relay's characteristics will be maintained.

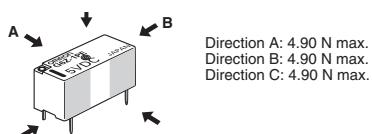

Secure the claws to the shaded area.
Do not attach them to the center area
or to only part of the Relay.

Latching Relay Mounting

Make sure that the vibration or shock that is generated from other devices, such as Relays, on the same panel or substrate and imposed on the Latching Relay does not exceed the rated value, otherwise the set/reset status of the Latching Relay may be changed. The Latching Relay is reset before shipping. If excessive vibration or shock is imposed, however, the Latching Relay may be set accidentally. Be sure to apply a reset signal before use.

Coating

Do not use silicone coating to coat the Relay when it is mounted to the PCB. Do not wash the PCB after the Relay is mounted using detergent containing silicone. Otherwise, the detergent may remain on the surface of the Relay.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC
COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

Cat. No. X301-E-1b

09/11

Specifications subject to change without notice

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Printed in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron](#):

[G6ZK-1F DC5](#) [G6ZK-1FE-A-TR DC4.5](#) [G6ZK-1FE-TR DC4.5](#)