




REVISIONS				
P	LYN	DESCRIPTION	DATE	BYN
1	CM	00		
2	CM	00		
3	CM	00		
4	CM	00		
5	CM	00		
6	CM	00		
7	CM	00		
8	CM	00		
9	CM	00		
10	CM	00		
11	CM	00		
12	CM	00		
13	CM	00		
14	CM	00		
15	CM	00		
16	CM	00		
17	CM	00		
18	CM	00		
19	CM	00		
20	CM	00		
21	CM	00		
22	CM	00		
23	CM	00		
24	CM	00		
25	CM	00		
26	CM	00		
27	CM	00		
28	CM	00		
29	CM	00		
30	CM	00		
31	CM	00		
32	CM	00		
33	CM	00		
34	CM	00		
35	CM	00		
36	CM	00		
37	CM	00		
38	CM	00		
39	CM	00		
40	CM	00		
41	CM	00		
42	CM	00		
43	CM	00		
44	CM	00		
45	CM	00		
46	CM	00		
47	CM	00		
48	CM	00		
49	CM	00		
50	CM	00		
51	CM	00		
52	CM	00		
53	CM	00		
54	CM	00		
55	CM	00		
56	CM	00		
57	CM	00		
58	CM	00		
59	CM	00		
60	CM	00		
61	CM	00		
62	CM	00		
63	CM	00		
64	CM	00		
65	CM	00		
66	CM	00		
67	CM	00		
68	CM	00		
69	CM	00		
70	CM	00		
71	CM	00		
72	CM	00		
73	CM	00		
74	CM	00		
75	CM	00		
76	CM	00		
77	CM	00		
78	CM	00		
79	CM	00		
80	CM	00		
81	CM	00		
82	CM	00		
83	CM	00		
84	CM	00		
85	CM	00		
86	CM	00		
87	CM	00		
88	CM	00		
89	CM	00		
90	CM	00		
91	CM	00		
92	CM	00		
93	CM	00		
94	CM	00		
95	CM	00		
96	CM	00		
97	CM	00		
98	CM	00		
99	CM	00		
100	CM	00		

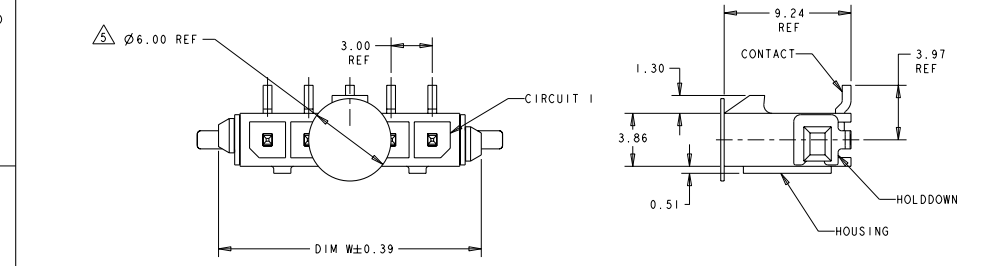

- △ MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
HOLDDOWNS: - PHOSPHOR BRONZE.
- △ PLATING: CONTACTS - 2.54µm MINIMUM TIN-LEAD OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM TIN-LEAD OVER 1.27µm MINIMUM NICKEL.
- △ RECOMMENDED PC BOARD THICKNESS OF 1.57.
- △ KAPTON VACUUM PICK UP BUTTON.
- △ PLATING: CONTACTS - 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS: 2.54µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL.

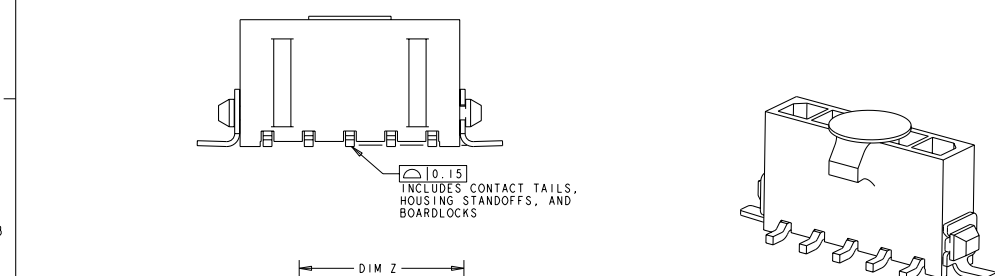

△	33.00	40.41	40.00	12	3-1445053-2
△	30.00	37.41	37.00	11	3-1445053-1
△	27.00	34.41	34.00	10	3-1445053-0
△	24.00	31.41	31.00	9	2-1445053-9
△	21.00	28.41	28.00	8	2-1445053-8
△	18.00	25.41	25.00	7	2-1445053-7
△	15.00	22.41	22.00	6	2-1445053-6
△	12.00	19.41	19.00	5	2-1445053-5
△	9.00	16.41	16.00	4	2-1445053-4
△	6.00	13.41	13.00	3	2-1445053-3
△	3.00	10.41	10.00	2	2-1445053-2
△	33.00	40.41	40.00	12	1-1445053-2
△	30.00	37.41	37.00	11	1-1445053-1
△	27.00	34.41	34.00	10	1-1445053-0
△	24.00	31.41	31.00	9	1445053-9
△	21.00	28.41	28.00	8	1445053-8
△	18.00	25.41	25.00	7	1445053-7
△	15.00	22.41	22.00	6	1445053-6
△	12.00	19.41	19.00	5	1445053-5
△	9.00	16.41	16.00	4	1445053-4
△	6.00	13.41	13.00	3	1445053-3
△	3.00	10.41	10.00	2	1445053-2
FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER

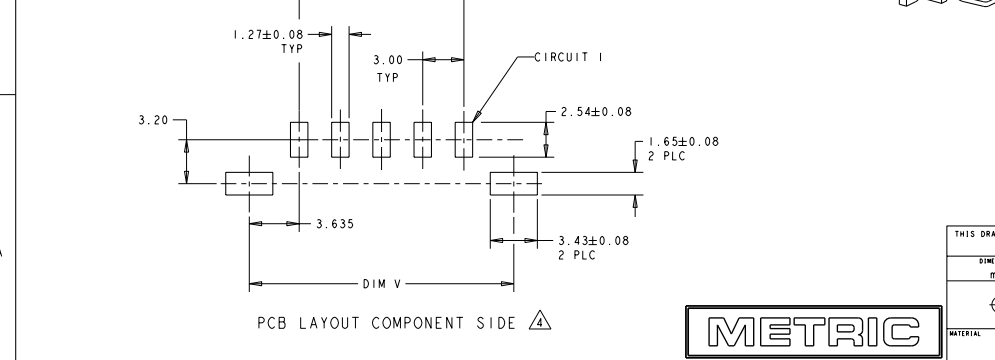

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE 07OCT2000. BY J. ROOT. CHECKED BY J. WHITNEY. APPROVED BY J. JONES. PRODUCT SPEC. APPLICATION SPEC. WEIGHT. CUSTOMER DRAWING. SCALE 5:1. SHEET 1 OF 1. REV C.1.

TE Connectivity
VERTICAL SURFACE MOUNT HEADER ASSY.
TIN CONTACTS, SURF MOUNT HOLDDOWNS,
SINGLE ROW, MICRO MATE-N-LOK™

RESTRICTED TO