| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 |

REVISIONS

P	LTR	DESCRIPTION	DATE.	DWN	APVD
	B8	REVISED PER ECO-14-009167	17JUN2014	DD	RL

KEYING OPTION A
(SHOW WITH CPA)

KEYING OPTION C
(SHOW WITH CPA)

KEYING OPTION D
(SHOW WITH CPA)

KEYING OPTION E
(SHOW WITH CPA)

KEYING OPTION F
(SHOW WITH CPA)

KEYING OPTION G
(SHOW WITH CPA)

KEYING OPTION H
(SHOW WITH CPA)

>PBT-GF30<

SHOWING MATING COMPONENTS
FOR REFERENCE ONLY

HOUSING
SPACER
CPA (OPTIONAL)
TERMINAL (FEMALE)

X-XXXXXX-X
YYJJJHH

(7.5)
(18.7)
(21.5)

Ø 32 min.

>PA66-GF35<

1   10

tyco   ZZ
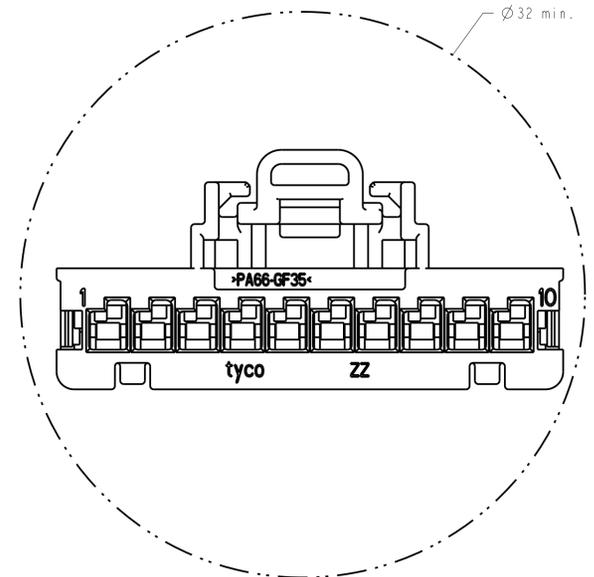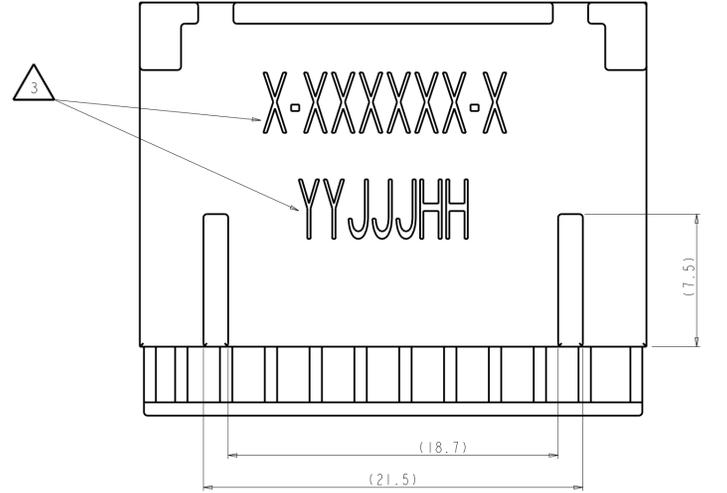
MINIMUM FEED THROUGH CONDITION

(19.47)
(13.55)
(12.05)
(10.22)
(1.2)
(19.55)
(23.37)

>PA66-GF35<
1   10
tyco   ZZ
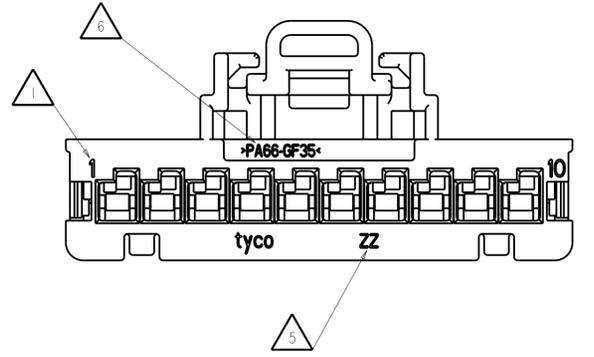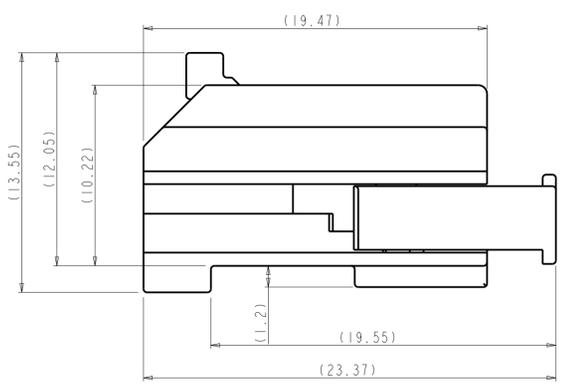
1. TERMINAL POSITION NUMBERS LOCATED AS SHOWN.

2. DELIVERY CONDITION: SPACER AND CPA (OPTIONAL) IN PRE INSTALLED POSITION.

3. PART NUMBER AND DATE CODE.

5. CAVITY NUMBER

6. MATERIAL IDENTIFICATION

7. PACKING: CONNECTOR ASSEMBLIES BULK PACKED IN CARDBOARD BOX.

8. KEYING "A" SHOWN.

9. DURING SHIPPING AND HANDLING THE TPA MAY BE DISPLACED TO ITS LOCKED POSITION. THE CONNECTOR CAN BE RETURNED TO ITS PROPER FUNCTION USING IS SHEET 408-10104.

10. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPERATLY) GOLD APPLICATIONS 1393364 AND 1393365. TIN APPLICATIONS 1393366 AND 1393367 FOR TERMINATION AND REELING OPTIONS SEE DRAWINGS 1393364, 1393365, 1393366 AND 1393367.

TE ORDER NUMBER		KEYING OPTIONS															DESCRIPTION	COLOR	MATERIAL	ITEM
		H	G	F	E	D	C	A											
1452187-8																			
1-1452187-8																			
1452187-7																			
1-1452187-6																			
1452187-6																			
1-1452187-5																			
1452187-5																			
1-1452187-4																			
1452187-4																			
1-1452187-3																			
1452187-3																			
1-1452187-1																			
1452187-1																			

		FEMALE HSG, KEY H	BLACK	>PA66-GF35<	1
		FEMALE HSG, KEY G	BLACK	>PA66-GF35<	1
		FEMALE HSG, KEY F	BLACK	>PA66-GF35<	1
		FEMALE HSG, KEY E	BLACK	>PA66-GF35<	1
		FEMALE HSG, KEY D	BLACK	>PA66-GF35<	1
		FEMALE HSG, KEY C	BLACK	>PA66-GF35<	1
		FEMALE HSG, KEY A	BLACK	>PA66-GF35<	1
		SPACER	RED	>PBT-GF30< >PBT+PC-GF30<	2
		CPA	RED	PBT-GF20	3
	QUANTITY	DESCRIPTION	COLOR	MATERIAL	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J. BAHAMONDE	06.12.01
CHM	M. DAUBER	06.12.01
APVD	G. STEINBACH	06.12.01

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

TE
TE Connectivity

NAME
1X10 POSITION, GET,
FEMALE CONNECTOR UNSEALED,
ASSEMBLY

PRODUCT SPEC
APPLICATION SPEC

MATERIAL -   FINISH -
WEIGHT -

| SIZE | CAGE CODE | DRAWING NO | | RESTRICTED TO |
| A1 | 00779 | C-1452187 | | - |

SCALE 5:1   SHEET 1 OF 1   REV B8

CUSTOMER DRAWING

4805 (3/13)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity](#):
  [1452187-1](#)