

## Type 12 Wiring Trough 1486 Series

### Application

- Designed to enclose and protect multiple wiring junctions from dirt, dust, oil and water.

### Standards

- UL 870 Type 1
- CSA Type 1
- Complies with
  - NEMA Type 12
  - JIC EGP-1-1967
  - JIC EMP-1-1967
  - IEC 60529, IP54




### Construction

- Formed 14 gauge steel.
- Smooth continuously welded seams.
- Butt hinged cover is secured with easily operated screw clamps.
- Oil resistant gaskets are permanently secured.
- 12 gauge external mounting feet are welded to the back.

### Finish

- Troughs and covers are finished in ANSI 61 gray powder coating.

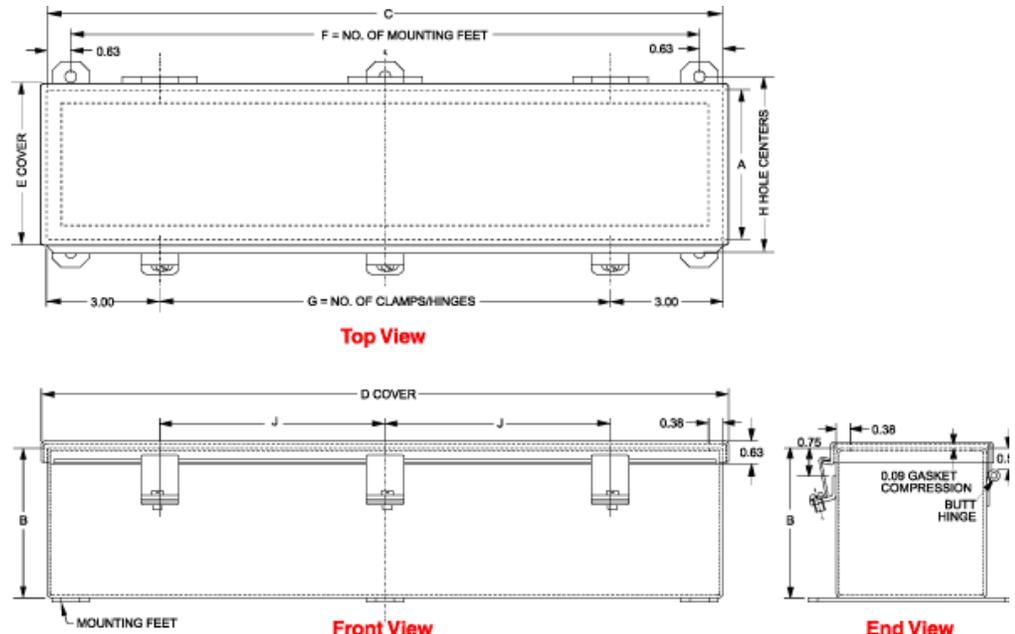

Part No.	Overall Dimensions			Cover Size					Ship Wt. (lbs)
	A	B	C	D	E	F	G	H	

Part No.	Overall Dimensions			Cover Size						Ship Wt. (lbs)
	A	B	C	D	E	F	G	H	J	
<b>1486B12</b>	2.50	2.50	12.00	12.31	2.84	2.00	2.00	3.19	6.00	3
<b>1486B18</b>	2.50	2.50	18.00	18.31	2.84	2.00	2.00	3.19	12.00	5
<b>1486B24</b>	2.50	2.50	24.00	24.31	2.84	2.00	3.00	3.19	9.00	6
<b>1486B30</b>	2.50	2.50	30.00	30.31	2.84	3.00	3.00	3.19	12.00	9
<b>1486B36</b>	2.50	2.50	36.00	36.31	2.84	3.00	3.00	3.19	15.00	10
<b>1486B48</b>	2.50	2.50	48.00	48.31	2.84	3.00	3.00	3.19	21.00	13
<b>1486B60</b>	2.50	2.50	60.00	60.31	2.84	3.00	4.00	3.19	18.00	16
<b>1486B72</b>	2.50	2.50	72.00	72.31	2.84	3.00	4.00	3.19	22.00	19
<b>1486C12</b>	4.00	4.00	12.00	12.31	4.34	2.00	2.00	4.69	6.00	6
<b>1486C18</b>	4.00	4.00	18.00	18.31	4.34	2.00	2.00	4.69	12.00	8
<b>1486C24</b>	4.00	4.00	24.00	24.31	4.34	2.00	3.00	4.69	9.00	10
<b>1486C30</b>	4.00	4.00	30.00	30.31	4.34	3.00	3.00	4.69	12.00	13
<b>1486C36</b>	4.00	4.00	36.00	36.31	4.34	3.00	3.00	4.69	15.00	16
<b>1486C48</b>	4.00	4.00	48.00	48.31	4.34	3.00	3.00	4.69	21.00	20
<b>1486C60</b>	4.00	4.00	60.00	60.31	4.34	3.00	4.00	4.69	18.00	25
<b>1486C72</b>	4.00	4.00	72.00	72.31	4.34	3.00	4.00	4.69	22.00	30
<b>1486D12</b>	6.00	6.00	12.00	12.31	6.34	2.00	2.00	6.69	6.00	9
<b>1486D18</b>	6.00	6.00	18.00	18.31	6.34	2.00	2.00	6.69	12.00	16
<b>1486D24</b>	6.00	6.00	24.00	24.31	6.34	2.00	3.00	6.69	9.00	16
<b>1486D30</b>	6.00	6.00	30.00	30.31	6.34	3.00	3.00	6.69	12.00	19
<b>1486D36</b>	6.00	6.00	36.00	36.31	6.34	3.00	3.00	6.69	15.00	23
<b>1486D48</b>	6.00	6.00	48.00	48.31	6.34	3.00	3.00	6.69	21.00	29
<b>1486D60</b>	6.00	6.00	60.00	60.31	6.34	3.00	4.00	6.69	18.00	32
<b>1486D72</b>	6.00	6.00	72.00	72.31	6.34	3.00	4.00	6.69	22.00	43

*Data subject to change without notice*