



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK



v04.1012

HMC967LP4E

GaAs MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Typical Applications


The HMC967LP4E is ideal for:

- Point-to-Point and Point-to-Multi-Point Radio
- Military Radar, EW & ELINT
- Satellite Communications

Features

- Conversion Gain: 15 dB
- Image Rejection: 25 dBc
- 2 LO to RF Isolation: 40 dB
- Noise Figure: 2.5 dB
- Input IP3: 1 dBm
- 24 Lead 4 x 4 mm SMT Package: 16 mm²

Functional Diagram

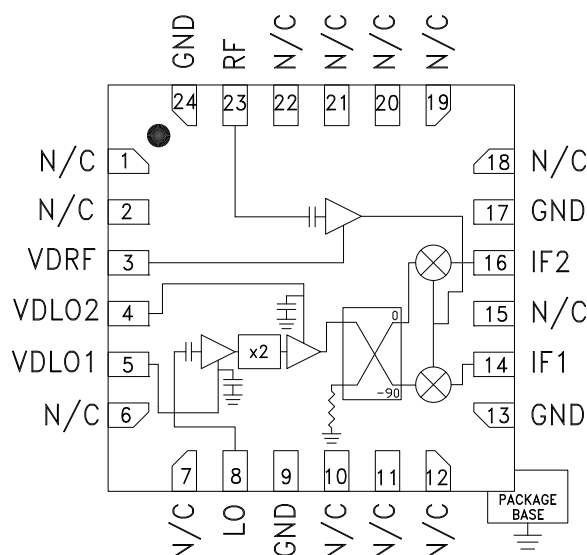

General Description

The HMC967LP4E is a compact GaAs MMIC I/Q downconverter in a leadless RoHS compliant SMT package. This device provides a small signal conversion gain of 15 dB with a noise figure of 2.5 dB and 25 dBc of image rejection across the frequency band. The HMC967LP4E utilizes an LNA followed by an image reject mixer which is driven by an active x2 multiplier. The image reject mixer eliminates the need for a filter following the LNA, and removes thermal noise at the image frequency. I and Q mixer outputs are provided and an external 90° hybrid is needed to select the required sideband. The HMC967LP4E is a much smaller alternative to hybrid style image reject mixer downconverter assemblies, and is compatible with surface mount manufacturing techniques.

Electrical Specifications, $T_A = +25^\circ\text{C}$, $IF = 1000\text{ MHz}$, $LO = +6\text{ dBm}$, $V_{dd} = 3.5\text{ Vdc USB}$ ^[1]

Parameter	Min.	Typ.	Max.	Units
Frequency Range, RF	21 - 24			GHz
Frequency Range, LO	8.8 - 13.5			GHz
Frequency Range, IF	DC - 3.5			GHz
Conversion Gain (As IRM)	11	15		dB
Noise Figure		2.5	3.5	dB
Image Rejection	15	25		dBc
1 dB Compression (Input)		-8.5		dBm
2 LO to RF Isolation	32	40		dB
2 LO to IF Isolation	14	20		dB
IP3 (Input)	-2	1		dBm
Amplitude Balance ^[2]		0.5		dB
Phase Balance ^[2]		-12		deg
Total Supply Current		170	210	mA

[1] Data taken as IRM with external IF 90° Hybrid

[2] Data taken without external 90° hybrid, IF = 500 MHz


For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com

Data Taken As IRM With External IF 90° Hybrid, IF = 1000 MHz

Conversion Gain USB vs. Temperature

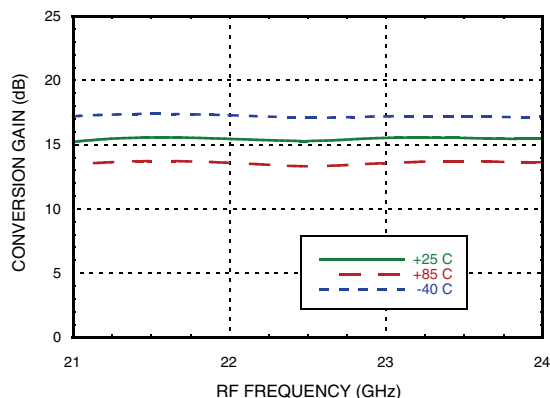

Conversion Gain USB vs. LO Drive



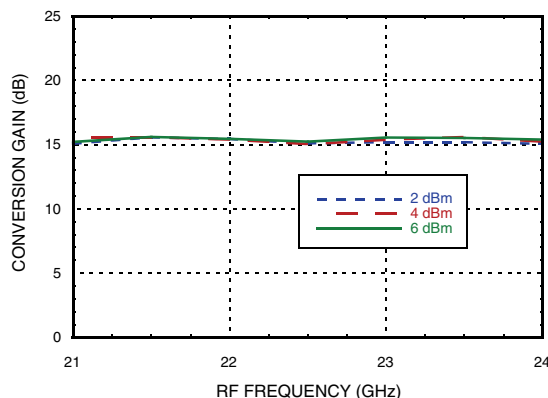



Image Rejection vs. Temperature

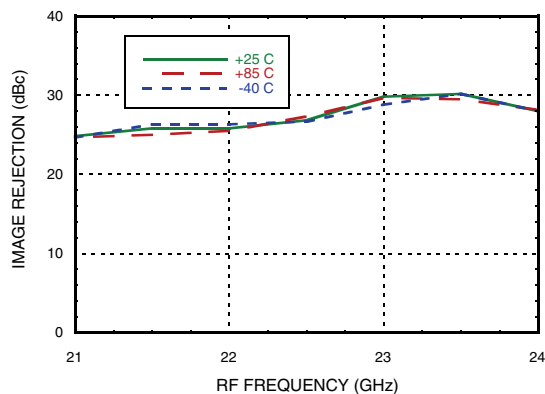


RF Return Loss vs. Temperature

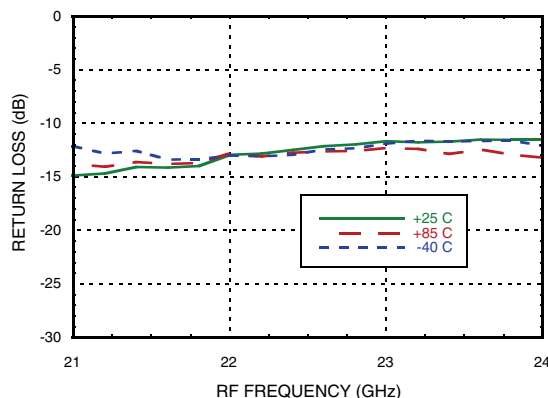

LO Return Loss vs. Temperature

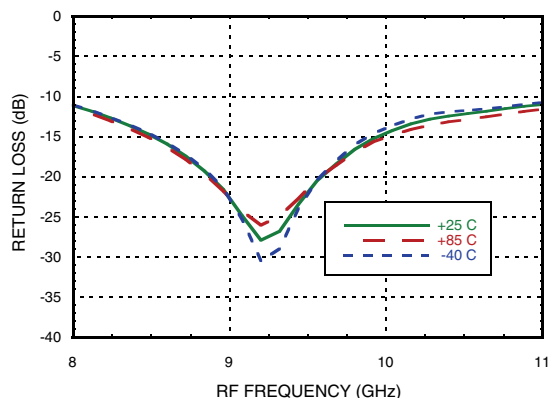

IF Return Loss ^[1]

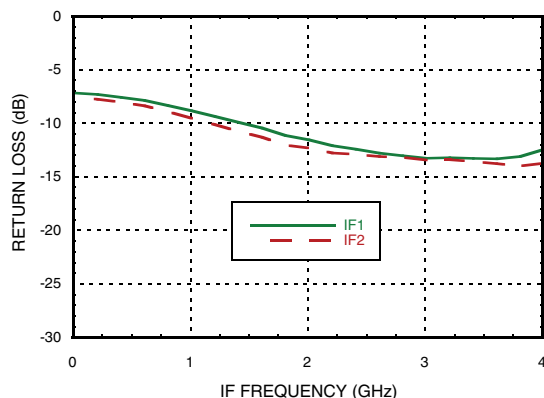


[1] Data taken without external 90° hybrid.


GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Data Taken as IRM With External IF 90° Hybrid, IF = 1000 MHz


Isolations

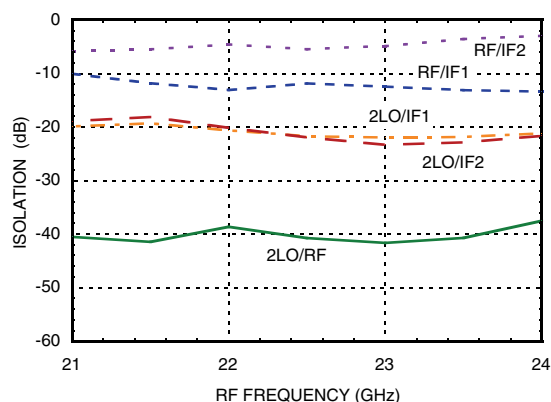


Input P1dB USB vs. Temperature

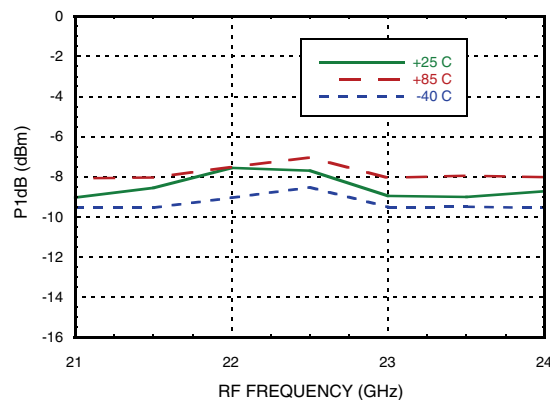


Input IP3, USB vs. Temperature

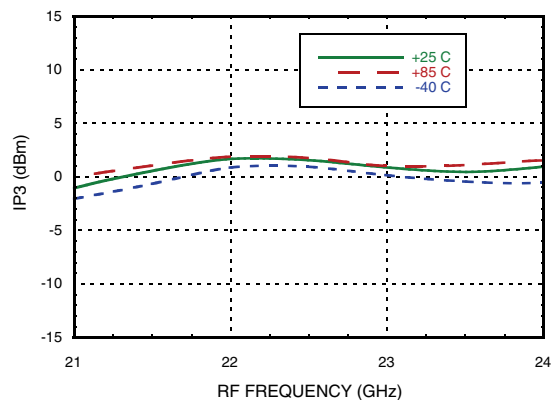


Input IP3, USB vs. LO Drive

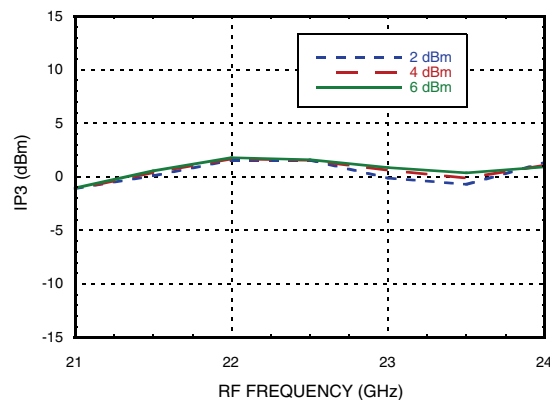

Noise Figure vs. LO Drive, LO Frequency = 8.25 GHz

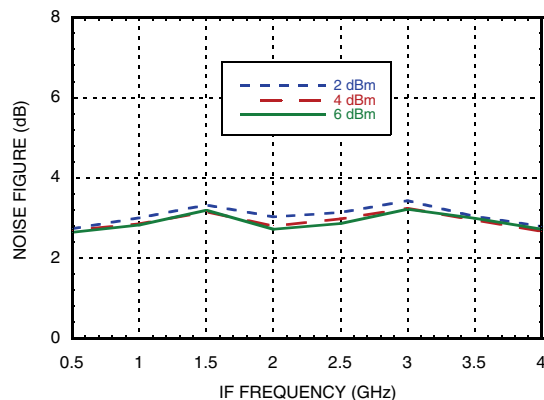


Noise Figure vs. Temperature, IF Frequency = 1000 MHz

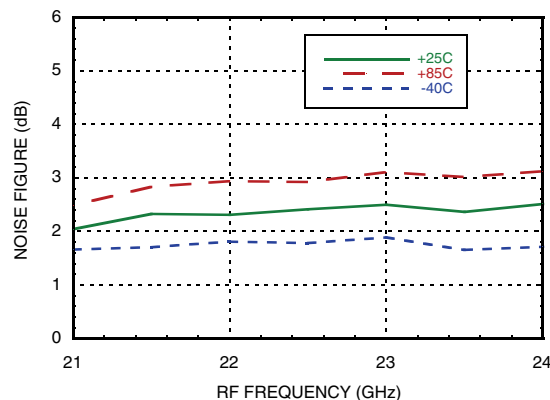


GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Quadrature Channel Data Taken Without IF 90° Hybrid, IF = 1000 MHz


IF Bandwidth ^[1]

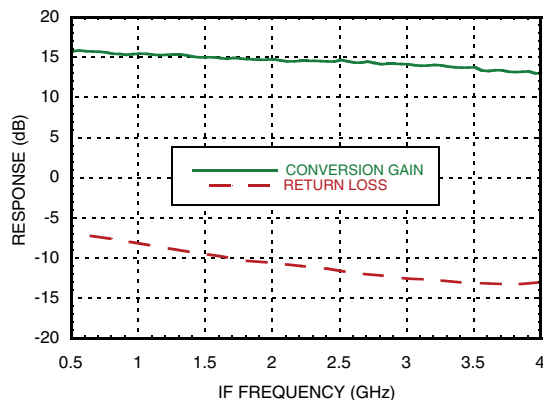

Amplitude Balance vs. LO Drive ^[2]

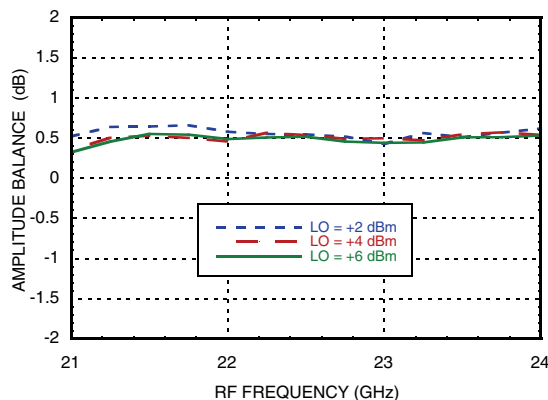

Phase Balance vs. LO Drive ^[1]

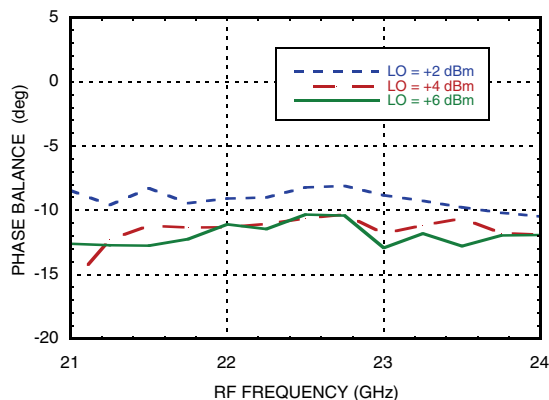

[1] Data taken with LO frequency fixed at 8.5 GHz and RF varied.

[2] Data taken with IF = 500 MHz



MICROWAVE CORPORATION

v04.1012




HMC967LP4E

GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Data Taken as IRM With External IF 90° Hybrid, IF = 1000 MHz

Conversion Gain, LSB vs. Temperature

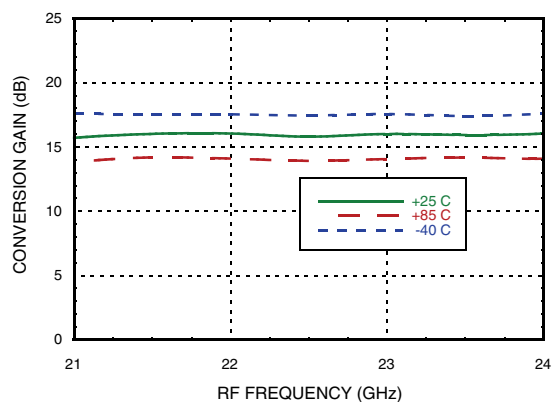

Conversion Gain, LSB vs. LO Drive



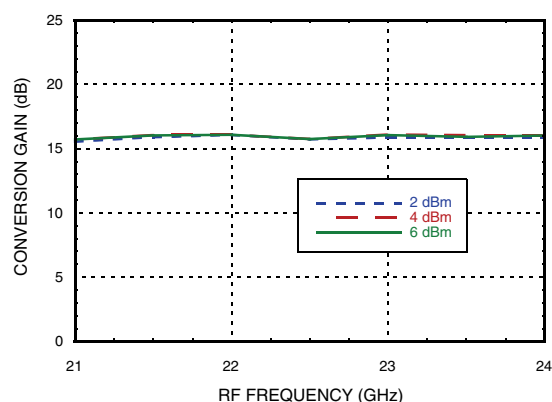



Image Rejection vs. Temperature

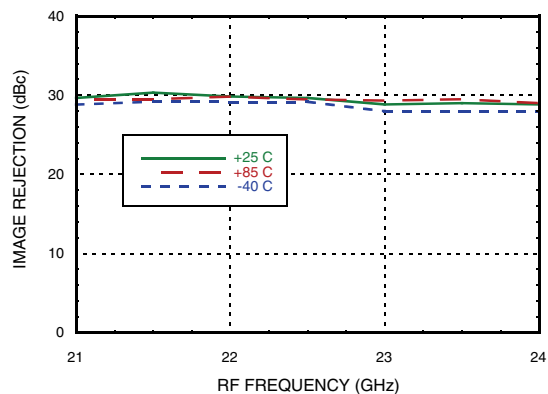


Input P1dB, LSB vs. Temperature

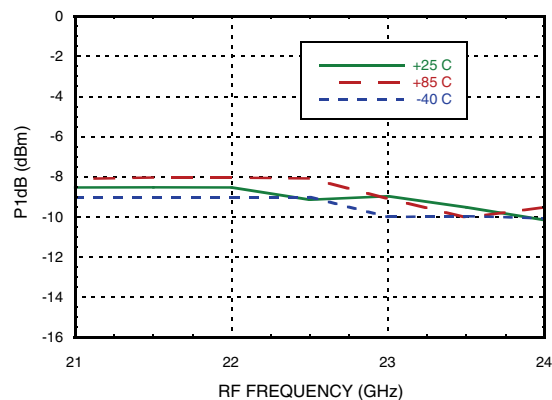

Input IP3, LSB vs. Temperature

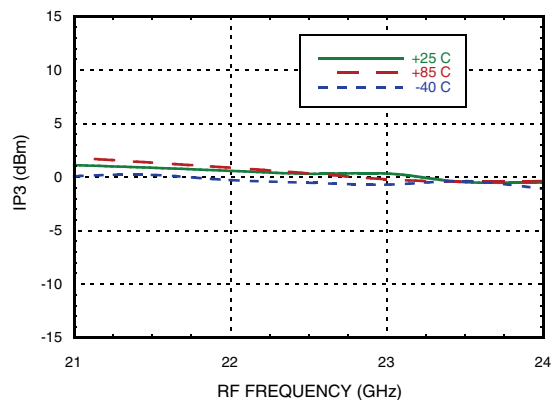


Input IP3, LSB vs. LO Drive

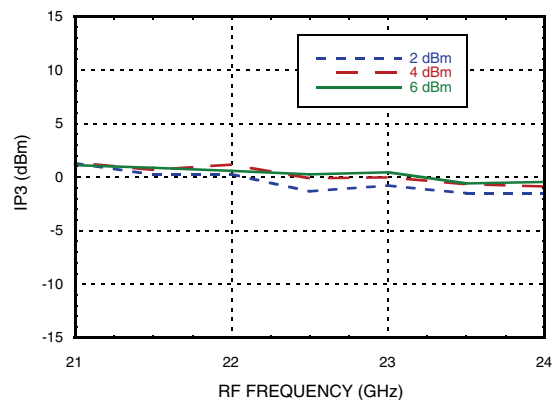

GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Data Taken as IRM With External IF 90° Hybrid, IF = 2000 MHz

Conversion Gain, USB vs. Temperature

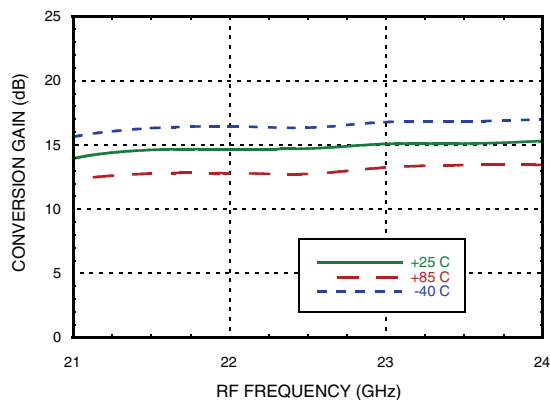

Conversion Gain, USB vs. LO Drive



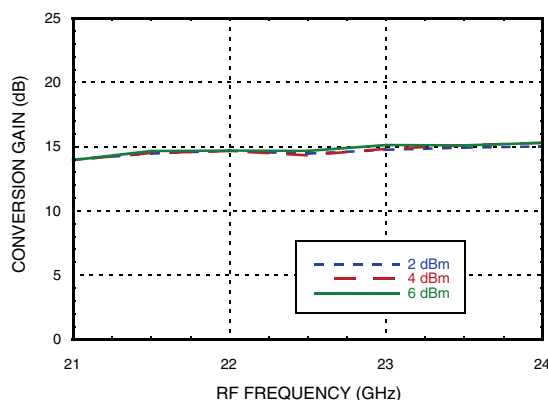



Image Rejection vs. Temperature

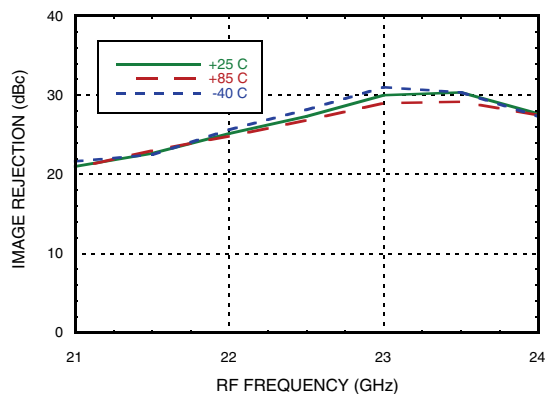

Input IP3, USB vs. Temperature

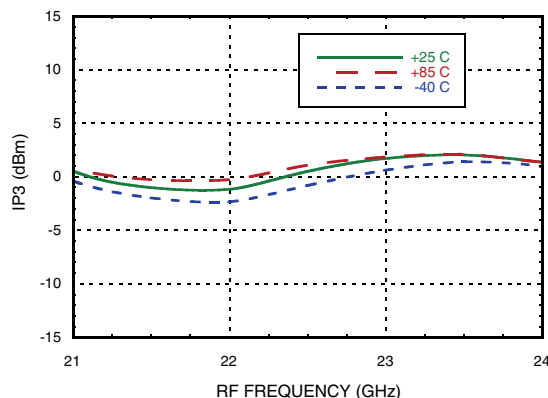


Input IP3, USB vs. LO Drive

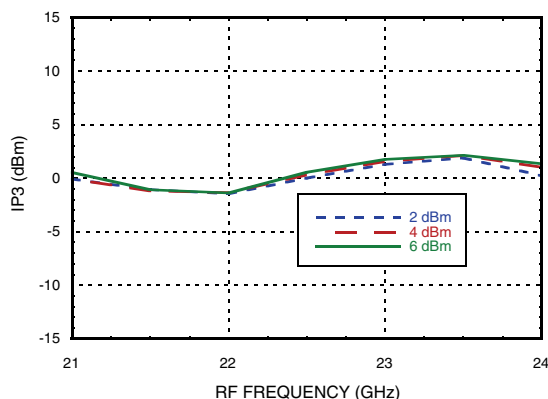

Data Taken as IRM With External IF 90° Hybrid, IF = 2000 MHz

Conversion Gain, LSB vs. Temperature

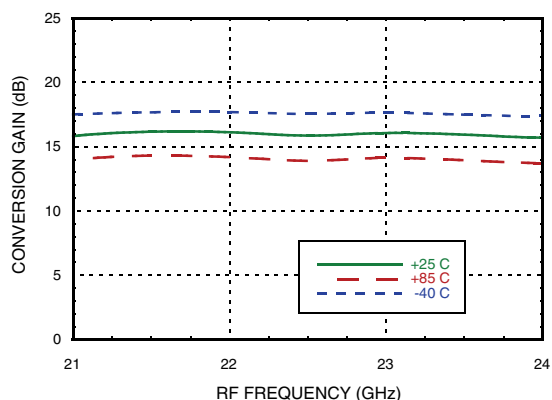

Conversion Gain, LSB vs. LO Drive



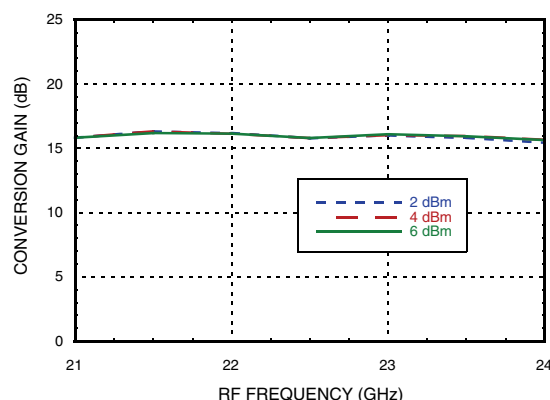



Image Rejection vs. Temperature

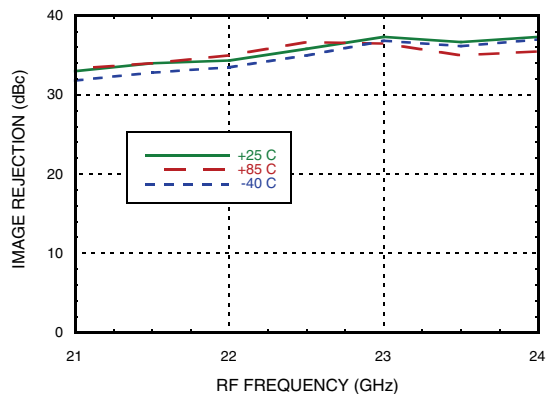

Input IP3, LSB vs. Temperature

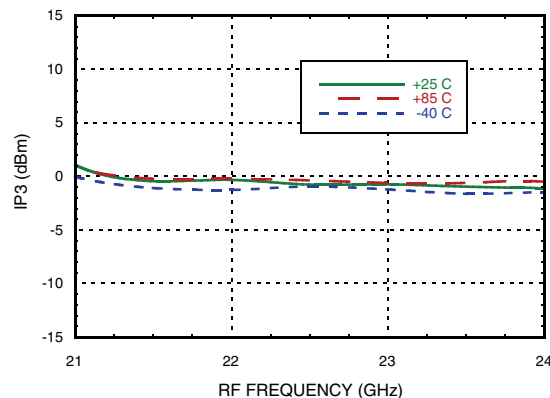


Input IP3, LSB vs. LO Drive

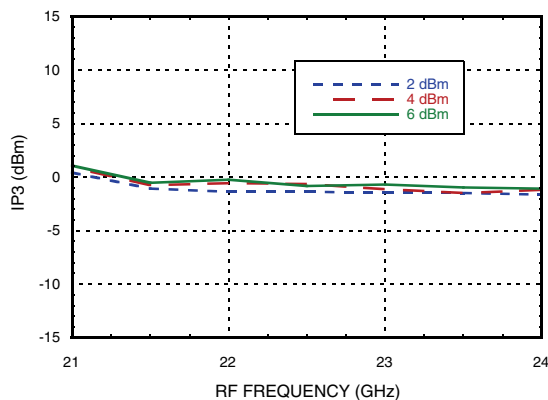

GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Data Taken as IRM With External IF 90° Hybrid, IF = 3300 MHz

Conversion Gain, USB vs. Temperature

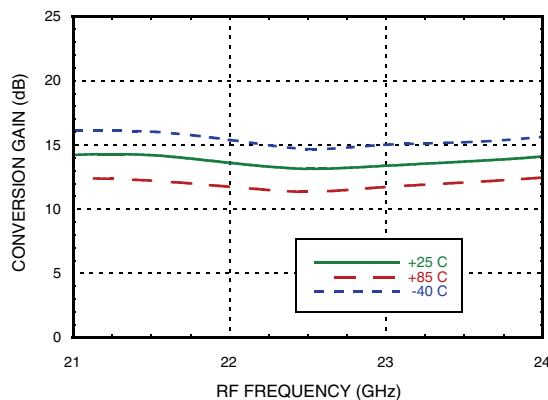

Conversion Gain, USB vs. LO Drive



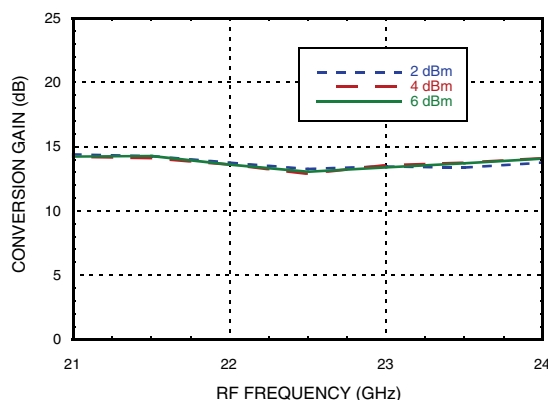



Image Rejection vs. Temperature

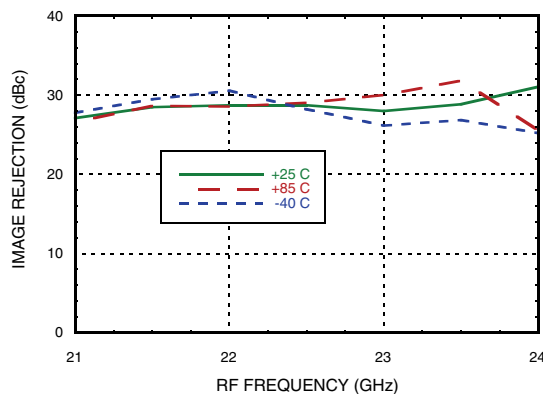

Input IP3, USB vs. Temperature

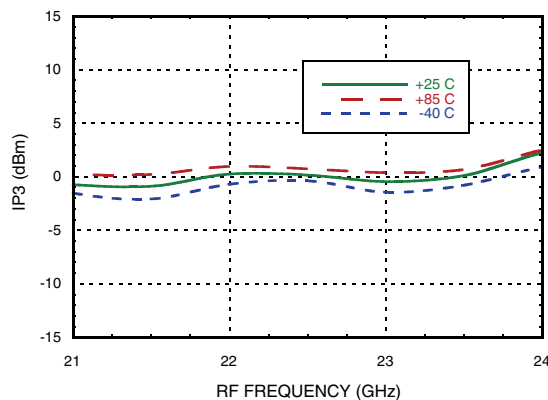

Input IP3, USB vs. LO Drive

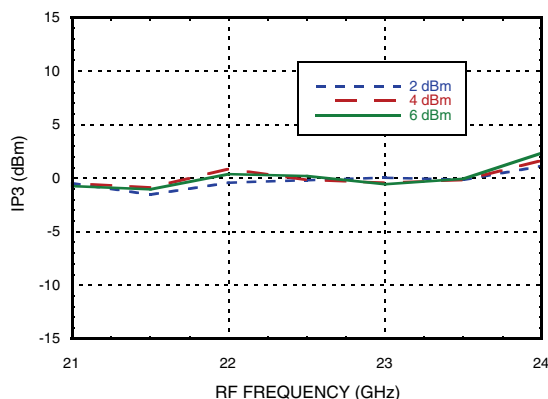



MICROWAVE CORPORATION

v04.1012




HMC967LP4E

GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz

Data Taken as IRM With External IF 90° Hybrid, IF = 3300 MHz

Conversion Gain, LSB vs. Temperature

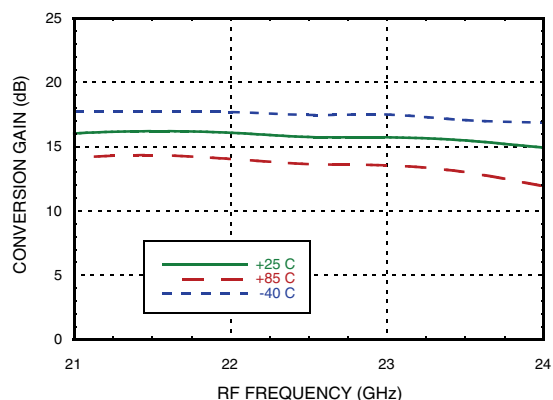

Conversion Gain, LSB vs. LO Drive



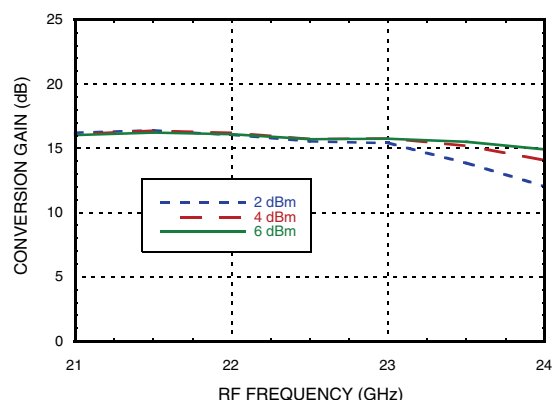



Image Rejection vs. Temperature

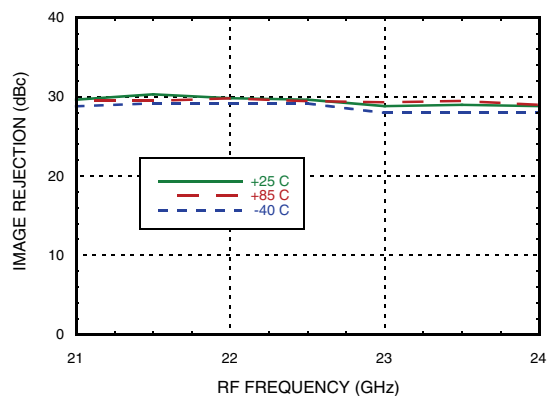

Input IP3, LSB vs. Temperature

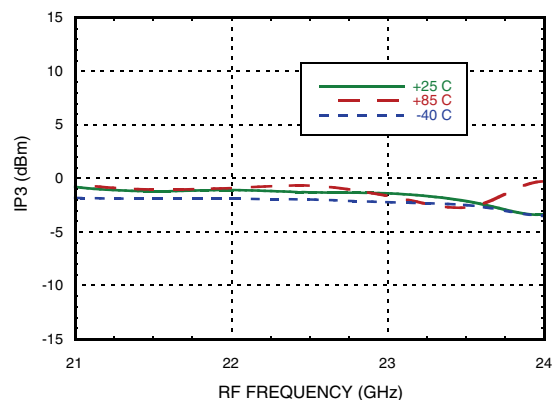

Input IP3, LSB vs. LO Drive

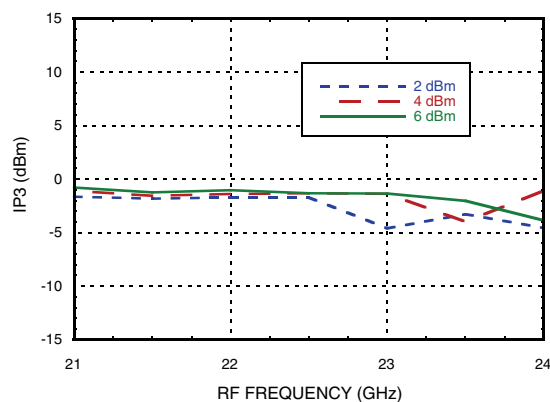



v04.1012


HMC967LP4E

GAAS MMIC I/Q DOWNCONVERTER 21 - 24 GHz


Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1, 2, 6, 7, 10 - 12, 15, 18 - 22	N/C	The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
3	VDRF	Power supply for RF LNA.	
4	VDLO2	Power supply for second stage of LO amplifier.	VDLO2
5	VDLO1	Power supply for first stage of LO amplifier.	VDLO1
8	LO	This pin is AC coupled and matched to 50 Ohms.	LO
9, 13, 17, 24	GND	These pins and the exposed ground paddle must be connected to RF/DC ground.	GND
16	IF2	This pin is DC coupled. For applications not requiring operation to DC this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary frequency range. For operation to DC, this pin must not sink / source more than 3 mA of current or part non-function and possible failure will result.	IF1, IF2
14	IF1		
23	RF	This pin is AC coupled and matched to 50 Ohms	RF

Typical Application Circuit

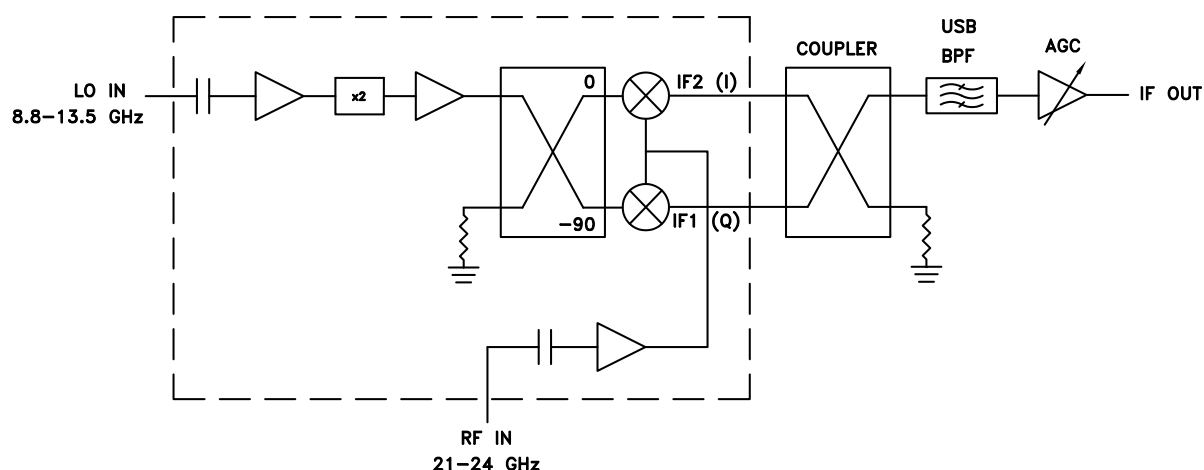

Evaluation PCB

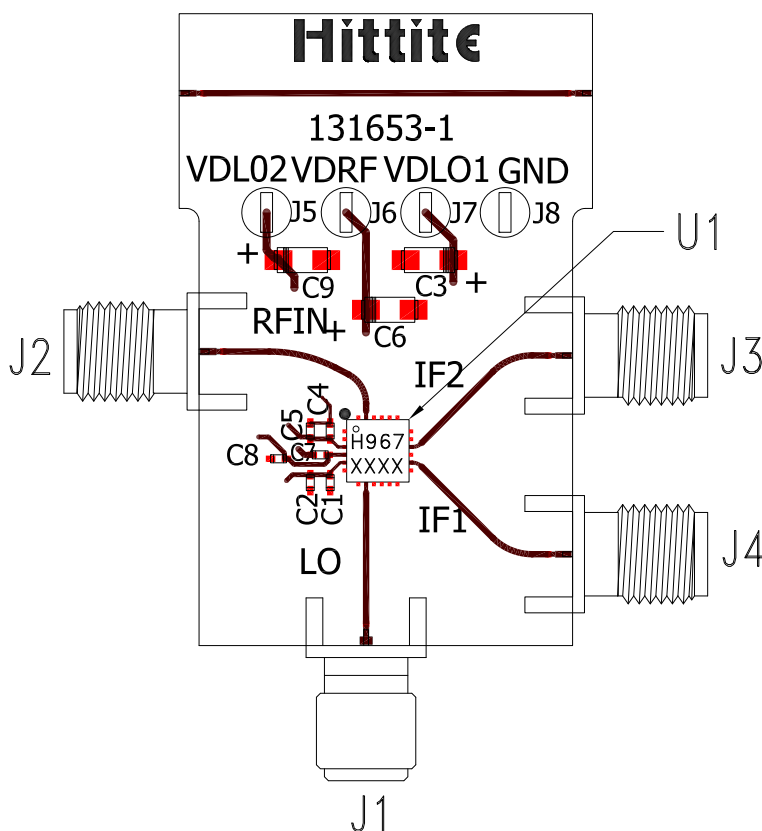

List of Materials for Evaluation PCB 131656 ^[1]

Item	Description
J1	PCB Mount SMA RF Connector, SRI
J2, J3	PCB Mount K Connector, SRI
J5 - J8	DC Pin
C1, C4, C7	100 pF Capacitor, 0402 Pkg.
C2, C5, C8	10 nF Capacitor, 0402 Pkg.
C3, C6, C9	4.7 μ F Capacitor, Case A Pkg.
U1	HMC967LP4E
PCB ^[2]	161653 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[HMC967LP4E](#) [131656-HMC967LP4E](#)