

## Standard Recovery Diodes (Stud Version), 150 A



DO-205AA (DO-8)

### FEATURES

- Alloy diode
- High current carrying capability
- High surge current capabilities
- Stud cathode and stud anode version
- RoHS compliant
- Designed and qualified for industrial level



### TYPICAL APPLICATIONS

- Battery chargers
- Welders
- Machine tool controls
- High power drives
- Medium traction applications
- Freewheeling diodes

### PRODUCT SUMMARY

|             |       |
|-------------|-------|
| $I_{F(AV)}$ | 150 A |
|-------------|-------|

### MAJOR RATINGS AND CHARACTERISTICS

| PARAMETER    | TEST CONDITIONS | VALUES      | UNITS             |
|--------------|-----------------|-------------|-------------------|
| $I_{F(AV)}$  |                 | 150         | A                 |
|              | $T_C$           | 150         | °C                |
| $I_{F(RMS)}$ |                 | 235         | A                 |
| $I_{FSM}$    | 50 Hz           | 3570        | A                 |
|              | 60 Hz           | 3740        |                   |
| $I^2t$       | 50 Hz           | 64          | kA <sup>2</sup> s |
|              | 60 Hz           | 58          |                   |
| $V_{RRM}$    | Range           | 100 to 600  | V                 |
| $T_J$        |                 | - 40 to 200 | °C                |

### ELECTRICAL SPECIFICATIONS

#### VOLTAGE RATINGS

| TYPE NUMBER                   | VOLTAGE CODE | $V_{RRM}$ , MAXIMUM REPETITIVE<br>PEAK REVERSE VOLTAGE<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE<br>PEAK REVERSE VOLTAGE<br>V | $I_{RRM}$ MAXIMUM<br>AT $T_J = 175\text{ °C}$<br>mA |
|-------------------------------|--------------|-------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------|
| 45L(R)<br>150K(R)<br>150KS(R) | 10           | 100                                                         | 200                                                             | 35                                                  |
|                               | 20           | 200                                                         | 300                                                             |                                                     |
|                               | 30           | 300                                                         | 400                                                             |                                                     |
|                               | 40           | 400                                                         | 500                                                             |                                                     |
|                               | 60           | 600                                                         | 720                                                             |                                                     |

# 45L(R), 150K(R), 150KS(R) Series



Vishay High Power Products Standard Recovery Diodes  
(Stud Version), 150 A

| FORWARD CONDUCTION                                            |                     |                                                                                                            |                                  |                                                                       |        |                    |
|---------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------|--------|--------------------|
| PARAMETER                                                     | SYMBOL              | TEST CONDITIONS                                                                                            |                                  |                                                                       | VALUES | UNITS              |
| Maximum average forward current at case temperature           | I <sub>F(AV)</sub>  | 180° conduction, half sine wave                                                                            |                                  |                                                                       | 150    | A                  |
|                                                               |                     |                                                                                                            |                                  |                                                                       | 150    | °C                 |
| Maximum RMS forward current                                   | I <sub>F(RMS)</sub> | DC at 142 °C case temperature                                                                              |                                  |                                                                       | 235    | A                  |
| Maximum peak, one cycle forward, non-repetitive surge current | I <sub>FSM</sub>    | t = 10 ms                                                                                                  | No voltage reapplied             | Sinusoidal half wave, initial T <sub>J</sub> = T <sub>J</sub> maximum | 3570   |                    |
|                                                               |                     | t = 8.3 ms                                                                                                 |                                  |                                                                       | 3740   |                    |
|                                                               |                     | t = 10 ms                                                                                                  | 100 % V <sub>RRM</sub> reapplied |                                                                       | 3000   |                    |
|                                                               |                     | t = 8.3 ms                                                                                                 |                                  |                                                                       | 3140   |                    |
| Maximum I <sup>2</sup> t for fusing                           | I <sup>2</sup> t    | t = 10 ms                                                                                                  | No voltage reapplied             |                                                                       | 64     | kA <sup>2</sup> s  |
|                                                               |                     | t = 8.3 ms                                                                                                 |                                  |                                                                       | 58     |                    |
|                                                               |                     | t = 10 ms                                                                                                  | 100 % V <sub>RRM</sub> reapplied |                                                                       | 45     |                    |
|                                                               |                     | t = 8.3 ms                                                                                                 |                                  |                                                                       | 41     |                    |
| Maximum I <sup>2</sup> √t for fusing                          | I <sup>2</sup> √t   | t = 0.1 to 10 ms, no voltage reapplied                                                                     |                                  |                                                                       | 640    | kA <sup>2</sup> √s |
| Low level value of threshold voltage                          | V <sub>F(TO)1</sub> | (16.7 % x π x I <sub>F(AV)</sub> ) < I < π x I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                                       | 0.67   | V                  |
| High level value of threshold voltage                         | V <sub>F(TO)2</sub> | (I > π x I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum                                     |                                  |                                                                       | 0.83   |                    |
| Low level value of forward slope resistance                   | r <sub>f1</sub>     | (16.7 % x π x I <sub>F(AV)</sub> ) < I < π x I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                                       | 1.42   | mΩ                 |
| High level value of forward slope resistance                  | r <sub>f2</sub>     | (I > π x I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum                                     |                                  |                                                                       | 0.91   |                    |
| Maximum forward voltage drop                                  | V <sub>FM</sub>     | I <sub>pk</sub> = 471 A, T <sub>J</sub> = 25 °C, t <sub>p</sub> = 10 ms sinusoidal wave                    |                                  |                                                                       | 1.33   | V                  |

| THERMAL AND MECHANICAL SPECIFICATIONS                    |         |                                   |                                               |                  |                     |
|----------------------------------------------------------|---------|-----------------------------------|-----------------------------------------------|------------------|---------------------|
| PARAMETER                                                |         | SYMBOL                            | TEST CONDITIONS                               | VALUES           | UNITS               |
| Maximum junction operating and storage temperature range |         | T <sub>J</sub> , T <sub>Stg</sub> |                                               | - 40 to 200      | °C                  |
| Maximum thermal resistance, junction to case             |         | R <sub>thJC</sub>                 | DC operation                                  | 0.25             | K/W                 |
| Maximum thermal resistance, case to heatsink             |         | R <sub>thCS</sub>                 | Mounting surface, smooth, flat and greased    | 0.10             |                     |
| Mounting torque<br>45L                                   | minimum |                                   | Not lubricated threads                        | 14.1 (125)       | N · m<br>(lbf · in) |
|                                                          | maximum |                                   |                                               | 17.0 (150)       |                     |
|                                                          | minimum | Lubricated threads                | 12.2 (108)                                    | 15.0 (132)       |                     |
|                                                          | maximum |                                   |                                               |                  |                     |
| Mounting torque<br>150K<br>150KS                         | minimum |                                   | Not lubricated threads                        | 11.3 (100)       | N · m<br>(lbf · in) |
|                                                          | maximum |                                   |                                               | 14.1 (125)       |                     |
|                                                          | minimum | Lubricated threads                | 9.5 (85)                                      | 12.5 (110)       |                     |
|                                                          | maximum |                                   |                                               |                  |                     |
| Approximate weight                                       |         |                                   |                                               | 100              | g                   |
|                                                          |         |                                   |                                               | 3.5              | oz.                 |
| Case style                                               | 45L     |                                   | See dimensions - link at the end of datasheet | DO-205AC (DO-30) |                     |
|                                                          | 150K-A  |                                   |                                               | DO-205AA (DO-8)  |                     |
|                                                          | 150KS   |                                   |                                               | B-42             |                     |



## 45L(R), 150K(R), 150KS(R) Series

Standard Recovery Diodes Vishay High Power Products  
(Stud Version), 150 A

| $\Delta R_{thJC}$ CONDUCTION |                       |                        |                             |       |
|------------------------------|-----------------------|------------------------|-----------------------------|-------|
| CONDUCTION ANGLE             | SINUSOIDAL CONDUCTION | RECTANGULAR CONDUCTION | TEST CONDITIONS             | UNITS |
| 180°                         | 0.031                 | 0.023                  | $T_J = T_J \text{ maximum}$ | K/W   |
| 120°                         | 0.038                 | 0.040                  |                             |       |
| 90°                          | 0.048                 | 0.053                  |                             |       |
| 60°                          | 0.071                 | 0.075                  |                             |       |
| 30°                          | 0.120                 | 0.121                  |                             |       |

### Note

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

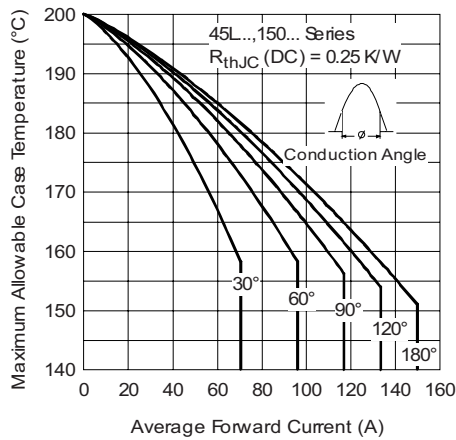


Fig. 1 - Current Ratings Characteristics

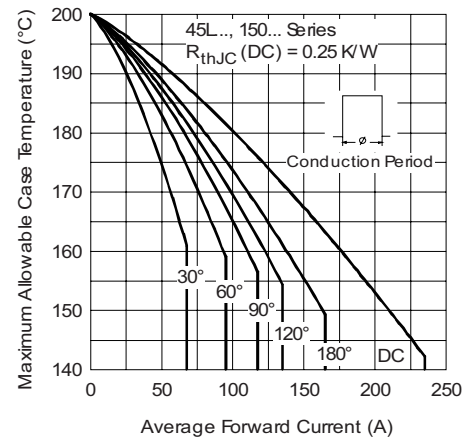


Fig. 2 - Current Ratings Characteristics

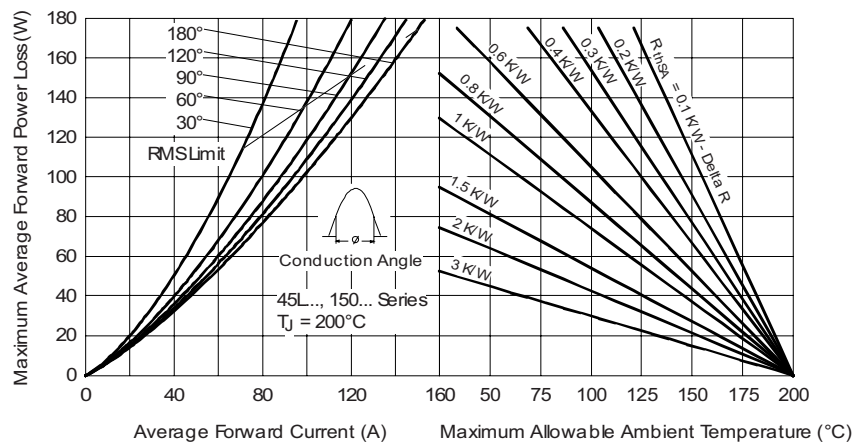


Fig. 3 - Forward Power Loss Characteristics

# 45L(R), 150K(R), 150KS(R) Series

Vishay High Power Products Standard Recovery Diodes  
(Stud Version), 150 A

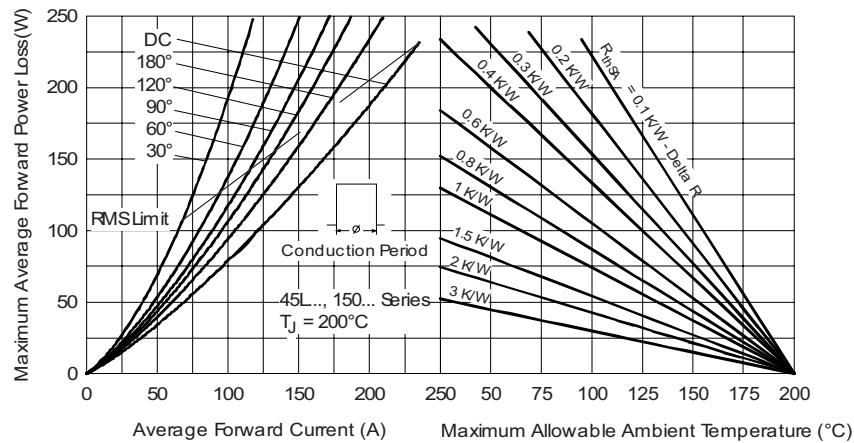


Fig. 4 - Forward Power Loss Characteristics

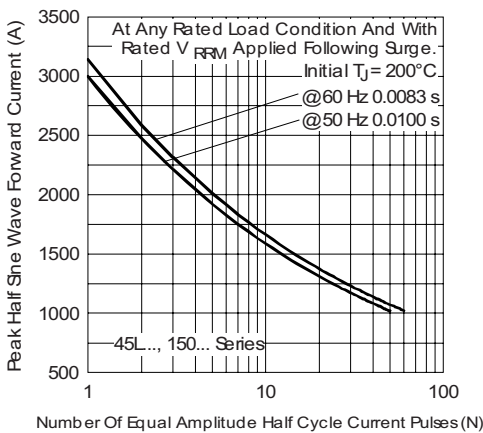


Fig. 5 - Maximum Non-Repetitive Surge Current

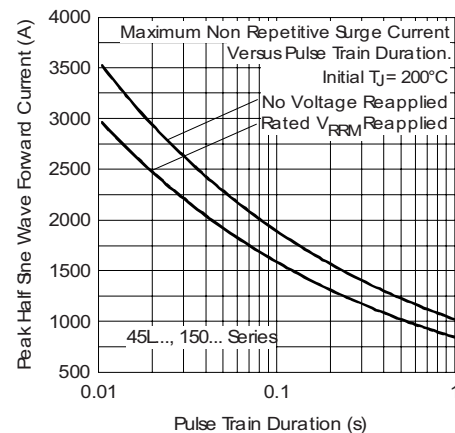


Fig. 6 - Maximum Non-Repetitive Surge Current

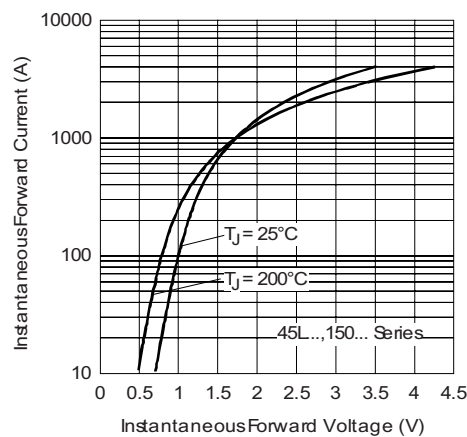


Fig. 7 - Forward Voltage Drop Characteristics



## 45L(R), 150K(R), 150KS(R) Series

Standard Recovery Diodes Vishay High Power Products  
(Stud Version), 150 A

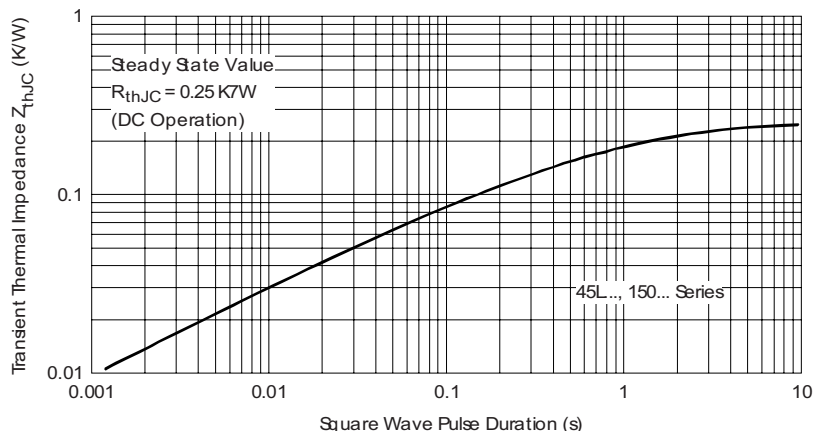


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics

### ORDERING INFORMATION TABLES

Device code

|    |   |   |    |
|----|---|---|----|
| 45 | L | R | 60 |
|----|---|---|----|

① ② ③ ④

- ① - 45 = Standard version
- ② - L = Essential part number
- ③ - R = Stud reverse polarity (anode to stud)  
None = Stud normal polarity (cathode to stud)
- ④ - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)

Device code

|    |   |   |   |    |   |
|----|---|---|---|----|---|
| 15 | 0 | K | R | 60 | A |
|----|---|---|---|----|---|

① ② ③ ④ ⑤ ⑥

- ① - 15 = Essential part number
- ② - 0 = Standard device
- ③ - Case style:  
K = DO-205AA (DO-8)  
KS = B-42
- ④ - R = Stud reverse polarity (anode to stud)  
None = Stud normal polarity (cathode to stud)
- ⑤ - Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)
- ⑥ - A = Essential part number for 150K (omitted for 150KS)

Note: For metric device M12 x 1.75 contact factory

#### LINKS TO RELATED DOCUMENTS

Dimensions

<http://www.vishay.com/doc?95314>



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.