

# **LQ150X1LGB1**

## **TFT-LCD Module**

Spec. Issue Date: November 16, 2004

No: LD-16Y04

PREPARED BY :     DATE

# SHARP

SPEC No. LD-16Y04

FILE No.

ISSUE : NOV.16.2004

APPROVED BY :     DATE

PAGE    : 24 pages

AVC Liquid Crystal Display GROUP  
SHARP CORPORATION

APPLICABLE GROUP  
AVC Liquid Crystal Display  
Group

## SPECIFICATION

DEVICE SPECIFICATION

# TFT-LCD Module

MODEL

# LQ150X1LGB1

**These parts have corresponded with the RoHS directive.**

☐ CUSTOMER'S APPROVAL

DATE \_\_\_\_\_

BY \_\_\_\_\_

PRESENTED

BY K. Shiono

K.SHIONO

Department General Manager

DEVELOPMENT ENGINEERING DEPT. II

TAKI DEVELOPMENT CENTER

AVC LIQUID CRYSTAL DISPLAY GROUP

SHARP CORPORATION

## RECORDS OF REVISION

LQ150X1LGB1

[illegible]

## 1. Application

This specification applies to the color 15.0 XGA TFT-LCD module LQ150X1LGB1.

- ◎These specification sheets are the proprietary product of SHARP CORPORATION("SHARP") and include materials protected under copyright of SHARP. Do not reproduce or cause any third party to reproduce them in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP.
- ◎The device listed in this technical literature was designed and manufactured for use in OA equipment.
- ◎In case of using the device for applications such as control and safety equipment for transportation(aircraft, trains, automobiles, etc. ), rescue and security equipment and various safety related equipment which require higher reliability and safety, take into consideration that appropriate measures such as fail-safe functions and redundant system design should be taken.
- ◎Do not use the device for equipment that requires an extreme level of reliability, such as aerospace applications, telecommunication equipment(trunk lines), nuclear power control equipment and medical or other equipment for life support.
- ◎SHARP assumes no responsibility for any damage resulting from the use of the device which does not comply with the instructions and the precautions specified in these specification sheets.
- ◎Contact and consult with a SHARP sales representative for any questions about this device.

## 2. Overview

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver ICs, control circuit, power supply circuit and a back light unit. Graphics and texts can be displayed on a  $1024 \times \text{RGB} \times 768$  dots panel with about 16 million colors by using LVDS (Low Voltage Differential Signaling) and supplying +3.3V DC supply voltages for TFT-LCD panel driving and supply voltage for backlight.

Backlight-driving DC/AC inverter is not built in this module.

## 3. Mechanical Specifications

| Parameter                  | Specifications                   | Unit  |
|----------------------------|----------------------------------|-------|
| Display size               | 38 (Diagonal)                    | cm    |
|                            | 15.0 (Diagonal)                  | Inch  |
| Active area                | 304.1 (H)×228.1 (V)              | mm    |
| Pixel format               | 1024 (H)×768 (V)                 | Pixel |
|                            | (1 pixel=R+G+B dots)             |       |
| Pixel pitch                | 0.297 (H)×0.297 (V)              | mm    |
| Pixel configuration        | R, G, B vertical stripe          |       |
| Display mode               | Normally white                   |       |
| Unit outline dimensions *1 | 331.6(W)×254.76(H)×12.5(D)       | mm    |
| Mass                       | 1200±50                          | g     |
| Surface treatment          | Anti-glare and hard-coating : 2H |       |

\*1.Note: excluding back light cables.

The thickness of module (D) doesn't contain the projection.

Outline dimensions are shown in Fig.1.

#### 4. Input Terminals

##### 4-1. TFT-LCD panel driving

CN1 (Interface signals and +3.3V DC power supply)

Using connectors : DF14H-20P-1.25H (Hirose Electric Co., Ltd.)

Corresponding connectors : DF14-20S-1.25C(Connector) (Hirose Electric Co., Ltd.)  
DF14-2628SCFA(Terminal) (Hirose Electric Co., Ltd.)

Using LVDS Receiver : Contained in a control IC. [THC63LVDF84A(Thine) compatible]

Corresponding LVDS Transmitter : THC63LVDM83R(Thine) or DSC90C385AMT(NS) or compatible

| Pin No. | Symbol   | Function                 | Remark  |
|---------|----------|--------------------------|---------|
| 1       | Vcc      | +3.3V Power supply       |         |
| 2       | Vcc      | +3.3V Power supply       |         |
| 3       | GND      | Ground                   |         |
| 4       | GND      | Ground                   |         |
| 5       | RxIN0-   | LVDS CH0 data signal (-) | LVDS    |
| 6       | RxIN0+   | LVDS CH0 data signal (+) | LVDS    |
| 7       | GND      | Ground                   |         |
| 8       | RxIN1-   | LVDS CH1 data signal (-) | LVDS    |
| 9       | RxIN1+   | LVDS CH1 data signal (+) | LVDS    |
| 10      | GND      | Ground                   |         |
| 11      | RxIN2-   | LVDS CH2 data signal (-) | LVDS    |
| 12      | RxIN2+   | LVDS CH2 data signal (+) | LVDS    |
| 13      | GND      | Ground                   |         |
| 14      | RxCLKIN- | LVDS CK- data signal (-) | LVDS    |
| 15      | RxCLKIN+ | LVDS CK+ data signal (+) | LVDS    |
| 16      | GND      | Ground                   |         |
| 17      | RxIN3-   | LVDS CH3 data signal (-) | LVDS    |
| 18      | RxIN3+   | LVDS CH3 data signal (+) | LVDS    |
| 19      | GND      | Ground                   |         |
| 20      | LVDS_SET | LVDS_SET                 | 【Note1】 |


## 4-2 Data Mapping

## 1) 8 bit input


【Note1】 pin assignment with LVDS\_SET pin (Thine:THC63LVDM83R)

| Transmitter |      | 20pin LVDS_SET   |           |
|-------------|------|------------------|-----------|
| Pin No      | Data | =L (GND) or Open | =H (3.3V) |
| 51          | TA0  | R0 (LSB)         | R2        |
| 52          | TA1  | R1               | R3        |
| 54          | TA2  | R2               | R4        |
| 55          | TA3  | R3               | R5        |
| 56          | TA4  | R4               | R6        |
| 3           | TA5  | R5               | R7 (MSB)  |
| 4           | TA6  | G0 (LSB)         | G2        |
| 6           | TB0  | G1               | G3        |
| 7           | TB1  | G2               | G4        |
| 11          | TB2  | G3               | G5        |
| 12          | TB3  | G4               | G6        |
| 14          | TB4  | G5               | G7 (MSB)  |
| 15          | TB5  | B0 (LSB)         | B2        |
| 19          | TB6  | B1               | B3        |
| 20          | TC0  | B2               | B4        |
| 22          | TC1  | B3               | B5        |
| 23          | TC2  | B4               | B6        |
| 24          | TC3  | B5               | B7 (MSB)  |
| 27          | TC4  | (NA)             | (NA)      |
| 28          | TC5  | (NA)             | (NA)      |
| 30          | TC6  | DE               | DE        |
| 50          | TD0  | R6               | R0 (LSB)  |
| 2           | TD1  | R7 (MSB)         | R1        |
| 8           | TD2  | G6               | G0 (LSB)  |
| 10          | TD3  | G7 (MSB)         | G1        |
| 16          | TD4  | B6               | B0 (LSB)  |
| 18          | TD5  | B7 (MSB)         | B1        |
| 25          | TD6  | (NA)             | (NA)      |

&lt;LVDS\_SET=L or Open&gt;

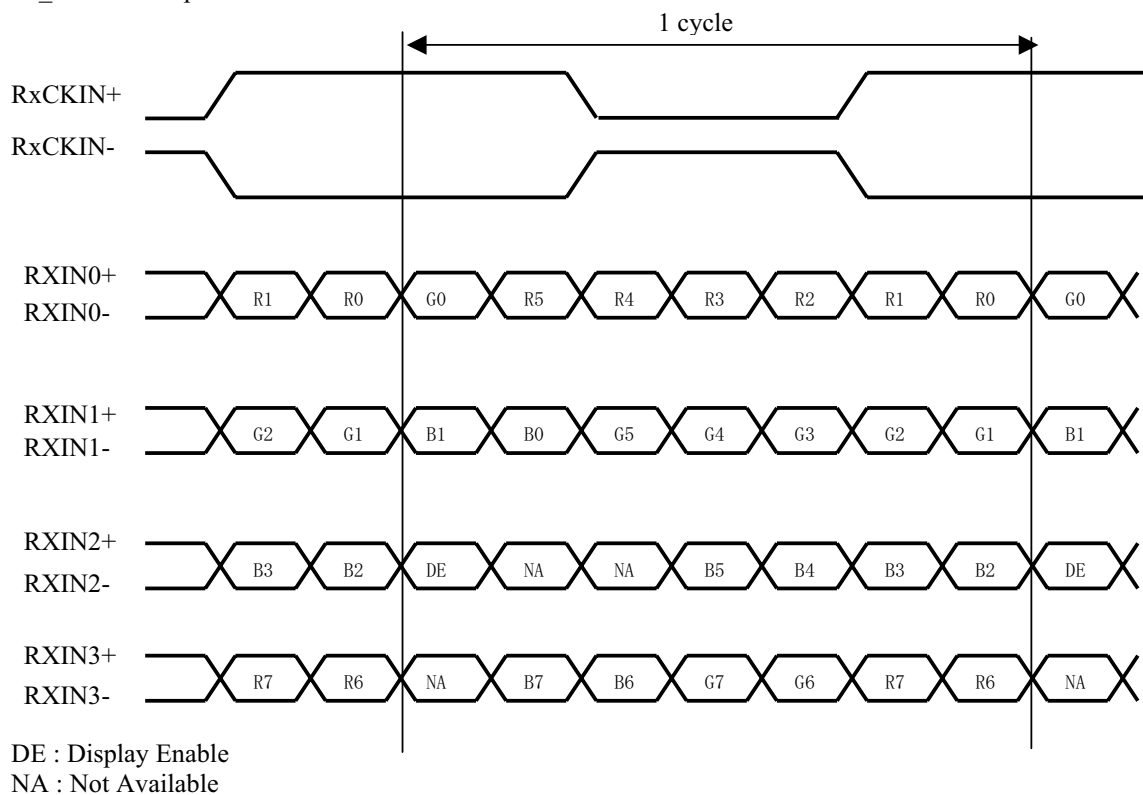


&lt;LVDS\_SET =H&gt;

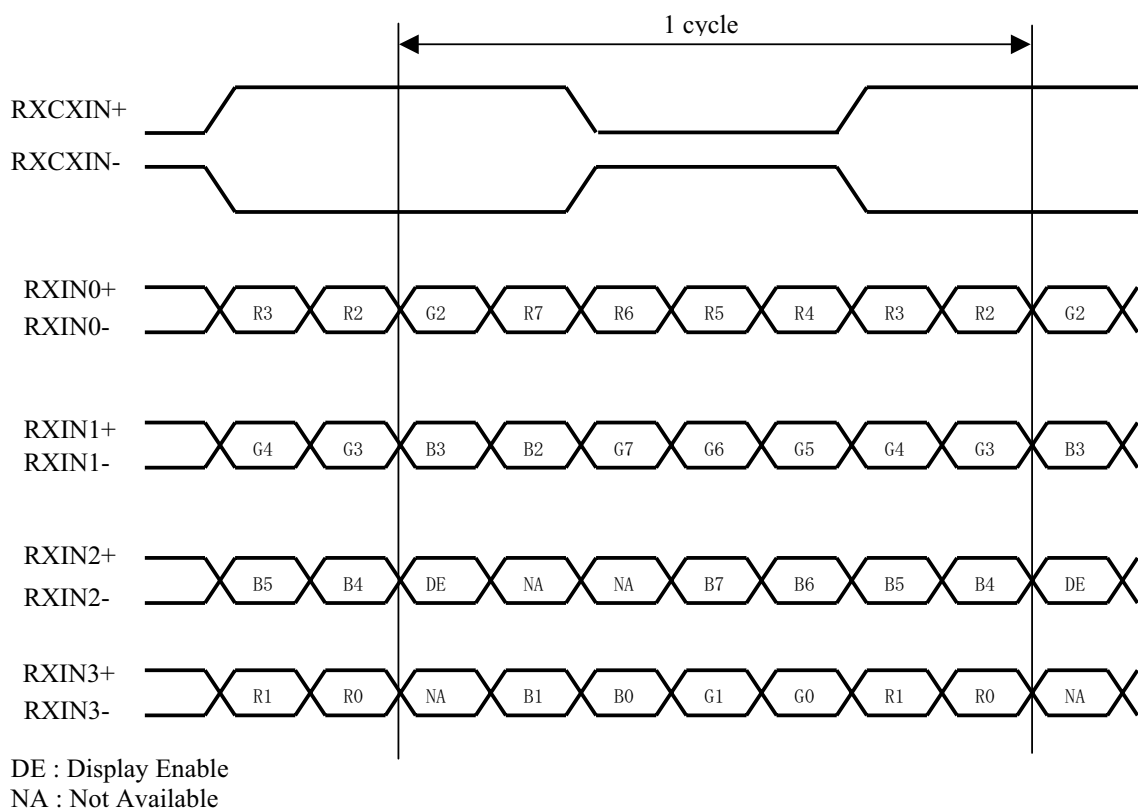

## 2) 6 bit input

【Note1】 pin assignment with LVDS\_SET pin (Thine:THC63LVDM83R)

| Transmitter |      | 20pin LVDS_SET   |           |
|-------------|------|------------------|-----------|
| Pin No      | Data | =L (GND) or Open | =H (3.3V) |
| 51          | TA0  | —                | R0 (LSB)  |
| 52          | TA1  | —                | R1        |
| 54          | TA2  | —                | R2        |
| 55          | TA3  | —                | R3        |
| 56          | TA4  | —                | R4        |
| 3           | TA5  | —                | R5 (MSB)  |
| 4           | TA6  | —                | G0 (LSB)  |
| 6           | TB0  | —                | G1        |
| 7           | TB1  | —                | G2        |
| 11          | TB2  | —                | G3        |
| 12          | TB3  | —                | G4        |
| 14          | TB4  | —                | G5 (MSB)  |
| 15          | TB5  | —                | B0 (LSB)  |
| 19          | TB6  | —                | B1        |
| 20          | TC0  | —                | B2        |
| 22          | TC1  | —                | B3        |
| 23          | TC2  | —                | B4        |
| 24          | TC3  | —                | B5 (MSB)  |
| 27          | TC4  | —                | (NA)      |
| 28          | TC5  | —                | (NA)      |
| 30          | TC6  | —                | DE        |
| 50          | TD0  | —                | GND       |
| 2           | TD1  | —                | GND       |
| 8           | TD2  | —                | GND       |
| 10          | TD3  | —                | GND       |
| 16          | TD4  | —                | GND       |
| 18          | TD5  | —                | GND       |
| 25          | TD6  | —                | (NA)      |

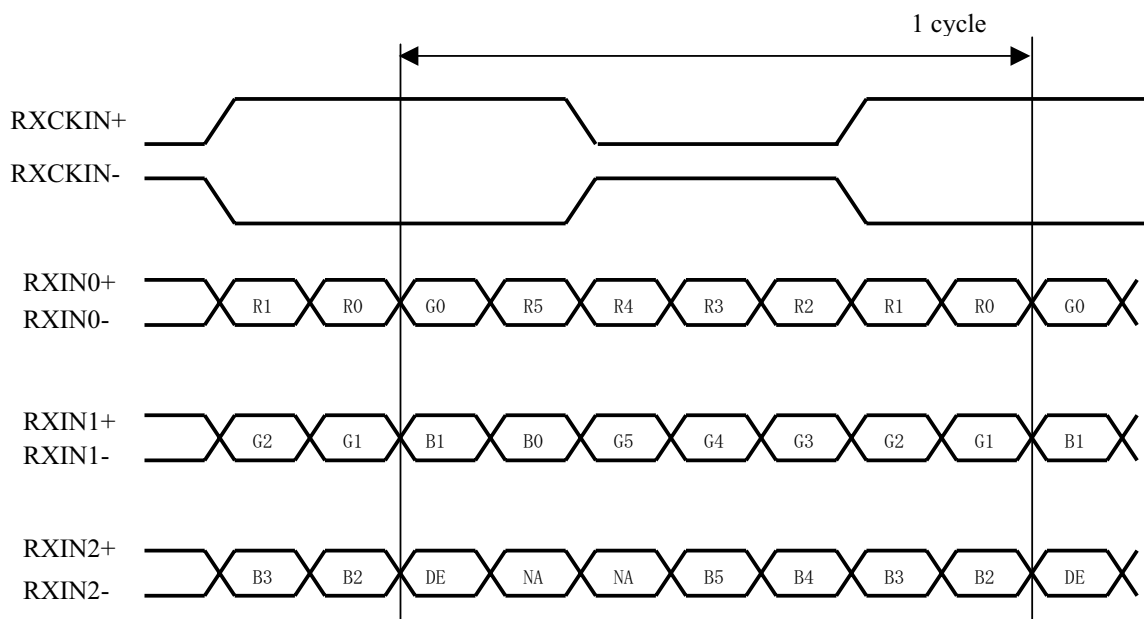

DE : Display Enable

NA : Not Available

※In case of supplying 6 bit signal, it is recommended to connect pin No.17(RXIN3-) with H(3.3V), and No.18(RXIN3+) with L (GND).

### 4-3 Interface block diagram


LD-16Y04-7

(Computer Side)

(TFT-LCD side)


①8Bit Mode

LVDS\_SET=L (20 pin=GND or OPEN)

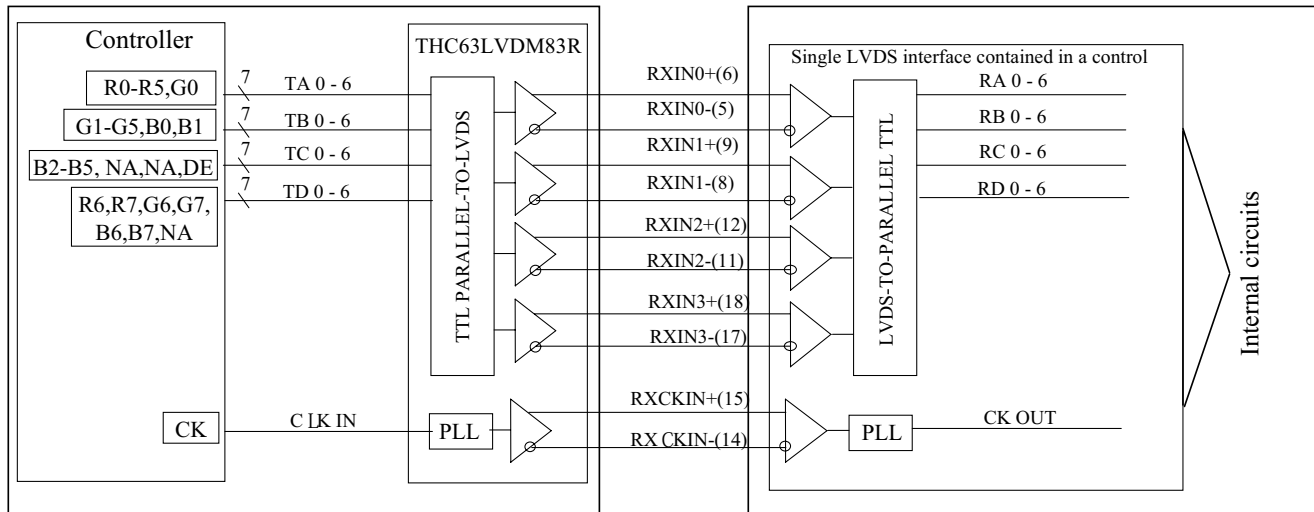


②8Bit Mode

LVDS\_SET=H (20 pin=3.3[V])

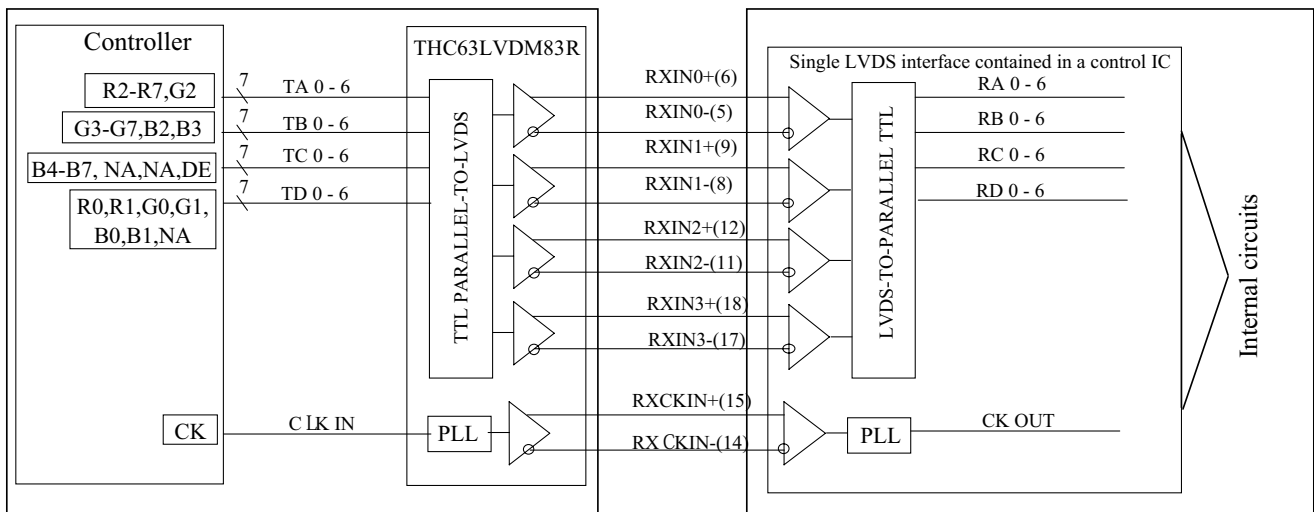

③6Bit Mode

LVDS\_SET=H (20 pin=3.3[V])

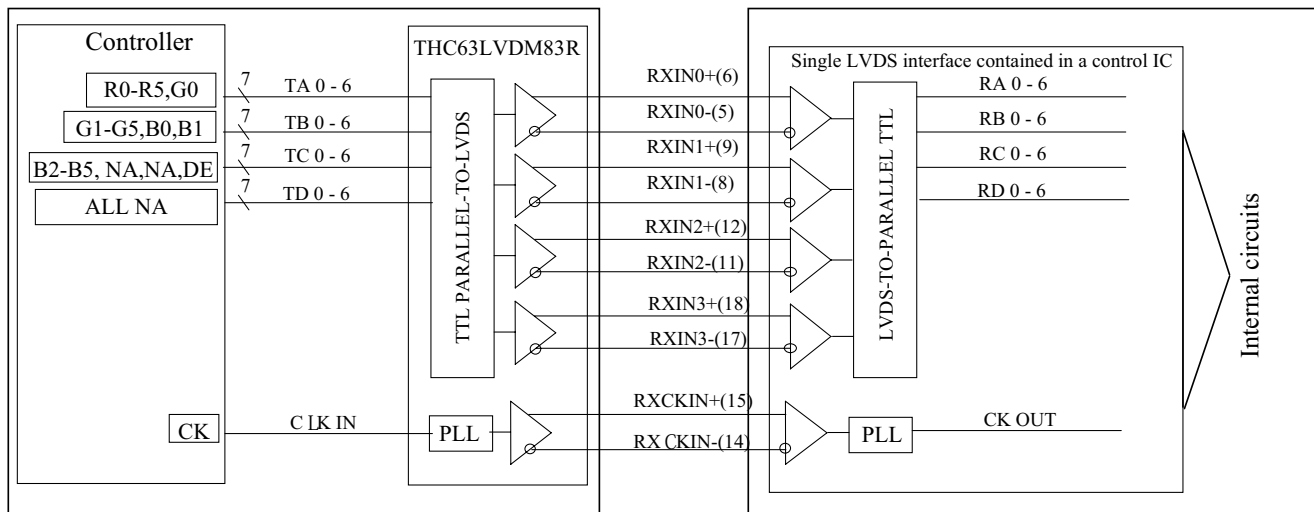


## 4-4. Backlight

CN 2, 3, 4, 5

The module-side connector : BHSR-02VS-1 (JST)

The user-side connector : SM02-BHSS-1-TB (JST)

| Pin no. | symbol            | Function                                    | I/O | Cable color    |
|---------|-------------------|---------------------------------------------|-----|----------------|
| 1       | V <sub>HIGH</sub> | Power supply for lamp 1 (High voltage side) | I   | Blue or Pink   |
| 2       | V <sub>LOW</sub>  | Power supply for lamp 1 (Low voltage side)  | I   | Brown or White |

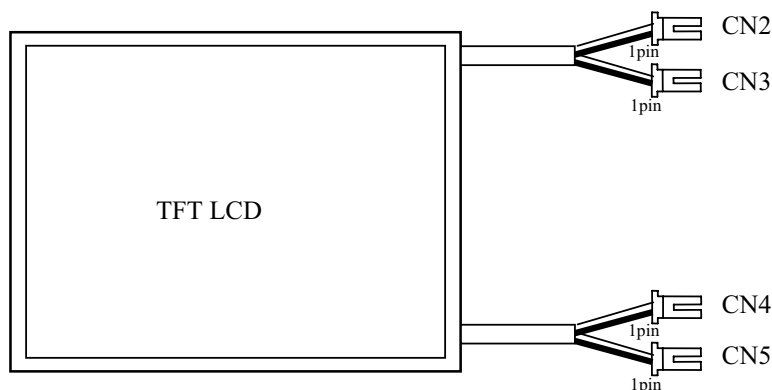

## 5. Absolute Maximum Ratings

5-1 module

| Parameter             | Symbol            | Condition            | Applied pin                   | Ratings                   | Unit             | Remark  |
|-----------------------|-------------------|----------------------|-------------------------------|---------------------------|------------------|---------|
| Supply voltage        | V <sub>CC</sub>   | T <sub>a</sub> =25°C | V <sub>CC</sub>               | -0.3 ~ +4.0               | V                | 【Note1】 |
| Lamp Input voltage    | V <sub>HIGH</sub> | —                    | —                             | 0 ~ +2000                 | V <sub>rms</sub> |         |
| Storage temperature   | T <sub>STG</sub>  | —                    | —                             | -30 ~ +70                 | °C               |         |
| Operating temperature | T <sub>OPA</sub>  | Panel surface        | —                             | 0 ~ +60                   | °C               |         |
| Input voltage         | V <sub>I1</sub>   | T <sub>a</sub> =25°C | RxIN-/(i=0,1,2)<br>RxCLKIN-/+ | -0.3~+0.3                 | V                |         |
|                       | V <sub>I2</sub>   | T <sub>a</sub> =25°C | LVDS_SET                      | -0.3~V <sub>CC</sub> +0.3 | V                |         |

【Note1】 Humidity : 95%RH Max. ( T<sub>a</sub>≤40°C ) Take care of static electricity.Maximum wet-bulb temperature at 39°C or less. ( T<sub>a</sub>>40°C ) No condensation.


## 6. Electrical Characteristics

## 6-1. TFT-LCD panel driving

Ta=25°C

| Parameter                            |                     | Symbol          | Min. | Typ. | Max. | Unit  | Remark                                                 |
|--------------------------------------|---------------------|-----------------|------|------|------|-------|--------------------------------------------------------|
| +3.3V                                | Supply voltage      | V <sub>CC</sub> | +3.0 | +3.3 | +3.6 | V     | 【Note1】                                                |
|                                      | Current dissipation | I <sub>CC</sub> | —    | 290  | 450  | mA    | 【Note2】                                                |
| Permissive input ripple voltage      |                     | V <sub>RF</sub> | —    | —    | 100  | mVp-p | V <sub>CC</sub> =+3.3V                                 |
| Differential input threshold voltage | High                | V <sub>TH</sub> | —    | —    | 100  | mV    | V <sub>CM</sub> =+1.2V<br>【Note3】                      |
|                                      | Low                 | V <sub>TL</sub> | -100 | —    | —    | mV    |                                                        |
| Input current (High)                 |                     | I <sub>OH</sub> | —    | —    | ±10  | μA    | V <sub>I</sub> =2.4V, V <sub>CC</sub> =3.6V<br>【Note4】 |
| Input current (Low)                  |                     | I <sub>OL</sub> | —    | —    | ±10  | μA    | V <sub>I</sub> =0V, V <sub>CC</sub> =3.6V<br>【Note4】   |
| Terminal resistor                    |                     | R <sub>T</sub>  | —    | 100  | —    | Ω     | Differential input                                     |

## 【Note1】

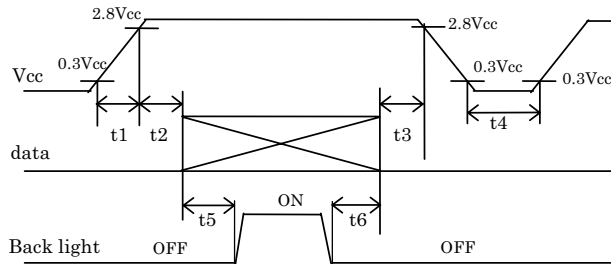On-off sequences of V<sub>CC</sub> and data

$$0 < t1 \leq 10\text{ms}$$

$$0 < t2 \leq 10\text{ms}$$


$$0 < t3 \leq 1\text{s}$$

$$1\text{s} \leq t4$$

$$200\text{ms} \leq t5$$

$$200\text{ms} \leq t6$$

Dip conditions for supply voltage

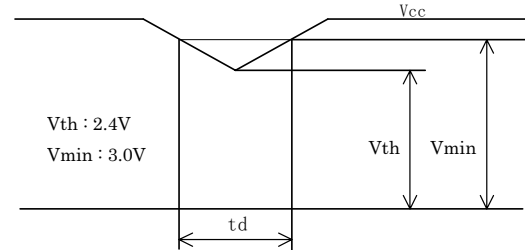

$$1) V_{th} \leq V_{CC} \leq V_{min}$$

$$t_d \leq 10\text{ms}$$

$$2) V_{CC} < V_{th}$$

V<sub>CC</sub>-dip conditions should also follow the on-off conditions.

It is recommended to consider some timing difference between LVDS input and Backlight input as shown above.

If the Backlight lights on before LCD starting, or if the Backlight is kept on after LCD stopping, the screen may look white for a moment or abnormal image may be displayed. This is caused by variation in output signal from timing generator at LVDS input on or off. It does not cause the damage to the LCD module.


## 【Note2】 Typical current situation : 253-gray-bar pattern

V<sub>CC</sub>=+3.3V, f<sub>ck</sub>=65MHz, Ta=25°C

Gray scale : GS(n)

$$n=0 \sim 252$$

The explanation of each gray scale, GS(n), is described below section 8.

【Note3】 V<sub>CM</sub> : LVDS Common mode voltage.【Note4】 V<sub>I</sub> : Input voltage to LVDS\_SET.

## 6-2. Backlight

The back light system is an edge-lighting type with four CCFTs (Cold Cathode Fluorescent Tube).

The characteristics of the lamp are shown in the following table.

The value mentioned below is at the case of one CCFT.

CCFT Model Name : KTBE222MSTF-320MA262-Z (STANLEY ELECTRIC CO., LTD.)

| Parameter              | Symbol | Min.   | Typ. | Max. | Unit  | Remark                                           |
|------------------------|--------|--------|------|------|-------|--------------------------------------------------|
| Lamp current range     | $I_L$  | 3.5    | 6.0  | 7.5  | mArms | 【Note1】                                          |
| Lamp voltage           | $V_L$  | —      | 625  | 720  | Vrms  | $T_a=25^{\circ}\text{C}$ , $I_L=6.0\text{mArms}$ |
| Lamp power consumption | $P_L$  | —      | 3.75 | 4.32 | W     | 【Note2】 , $I_L=6.0\text{mArms}$                  |
| Lamp frequency         | $F_L$  | 40     | 60   | 70   | kHz   | 【Note3】                                          |
| Kick-off voltage       | $V_s$  | —      | —    | 1480 | Vrms  | $T_a=0^{\circ}\text{C}$ 【Note4】                  |
| Lamp life time         | $T_L$  | 50,000 | —    | —    | hour  | 【Note5】                                          |


【Note1】 A lamp can be light in the range of lamp current shown above.

Maximum rating for current is measured by high frequency current measurement equipment connected to  $V_{LOW}$  at circuit showed below.

(Note : To keep enough kick-off voltage and necessary steady voltage for CCFT.)

Lamp frequency : 40~70kHz

Ambient temperature : 0~50°C

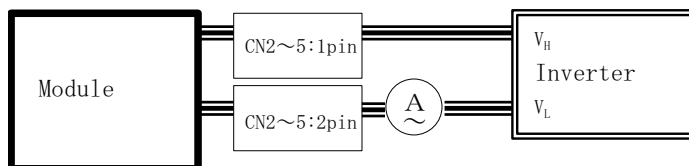

【Note2】 Referential data per one CCFT by calculation ( $I_L \times V_L$ ).


The data don't include loss at inverter.

【Note3】 Lamp frequency may produce interference with horizontal synchronous frequency, and this may cause beat on the display. Therefore lamp frequency shall be detached as much as possible from the horizontal synchronous frequency and from the harmonics of horizontal synchronous to avoid interference.

【Note4】 This is transformer output voltage at 27pF for the ballast capacitor of a DC-AC inverter.

The kick-off voltage may rise up in the user set, please decide the open output voltage by checking not to occur lighting failure under operating state.

The open output voltage should be applied to the lamp for more than 1 second to startup. Otherwise the lamp may not be turned on.

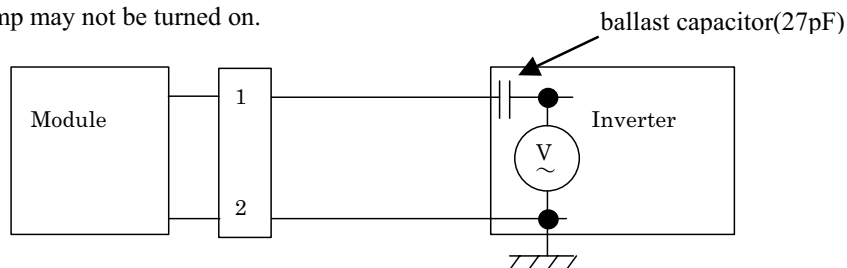

\* 2pin  $V_{LOW}$

【Note5】 Above value is applicable when lamp (the long side of LCD module) is placed horizontally.

(Landscape position)

Lamp life time is defined as the time when either ① or ② occurs in the continuous operation under the condition of  $T_a=25^{\circ}\text{C}$  and  $I_L=6.0\text{mA rms}$ .

① Brightness becomes 50% of the original value under standard condition.

② Kick-off voltage at  $T_a=0^{\circ}\text{C}$  exceeds 1480  $V_{rms}$  value.

(Lamp lifetime may vary if lamp is in portrait position due to the change of mercury density inside the lamp.)

## 《Note》

The performance of the backlight, for example lifetime or brightness, is much influenced by the characteristics of the DC-AC inverter for the lamp. When you design or order the inverter, please make sure that a poor lighting caused by the mismatch of the backlight and the inverter (miss-lighting, flicker, etc.) never occurs. When you confirm it, the module should be operated in the same condition as it is installed in your instrument.

Use the lamp inverter power source incorporating such safeguard as overvoltage / overcurrent protective circuit or lamp voltage waveform detection circuit, which should have individual control of each lamp.

In case one circuit without such individual control is connected to more than two lamps, excessive current may flow into one lamp when the other one is not in operation.


Under the environment of 10lx or less, miss-lighting or lighting delay may occur.

## 7. Timing characteristics of input signals

## 7-1-1. Timing characteristics


| Parameter                | Symbol | Min. | Typ. | Max. | Unit  | Remark  |
|--------------------------|--------|------|------|------|-------|---------|
| Frequency                | 1/Tc   | 50.0 | 65.0 | 80.0 | MHz   |         |
| Horizontal period        | TH     | 1056 | 1344 | 1720 | clock |         |
|                          |        | 16.0 | 20.7 | 23.4 | μs    |         |
| Horizontal period (High) | THd    | 1024 | 1024 | 1024 | clock |         |
| Vertical period          | TV     | 773  | 806  | 990  | line  | 【Note1】 |
|                          |        | 13.3 | 16.7 | 18.0 | ms    |         |
| Vertical period (High)   | TVd    | 768  | 768  | 768  | line  |         |

【Note1】 In case of using the long vertical period, the deterioration of display quality, flicker etc. may occur.

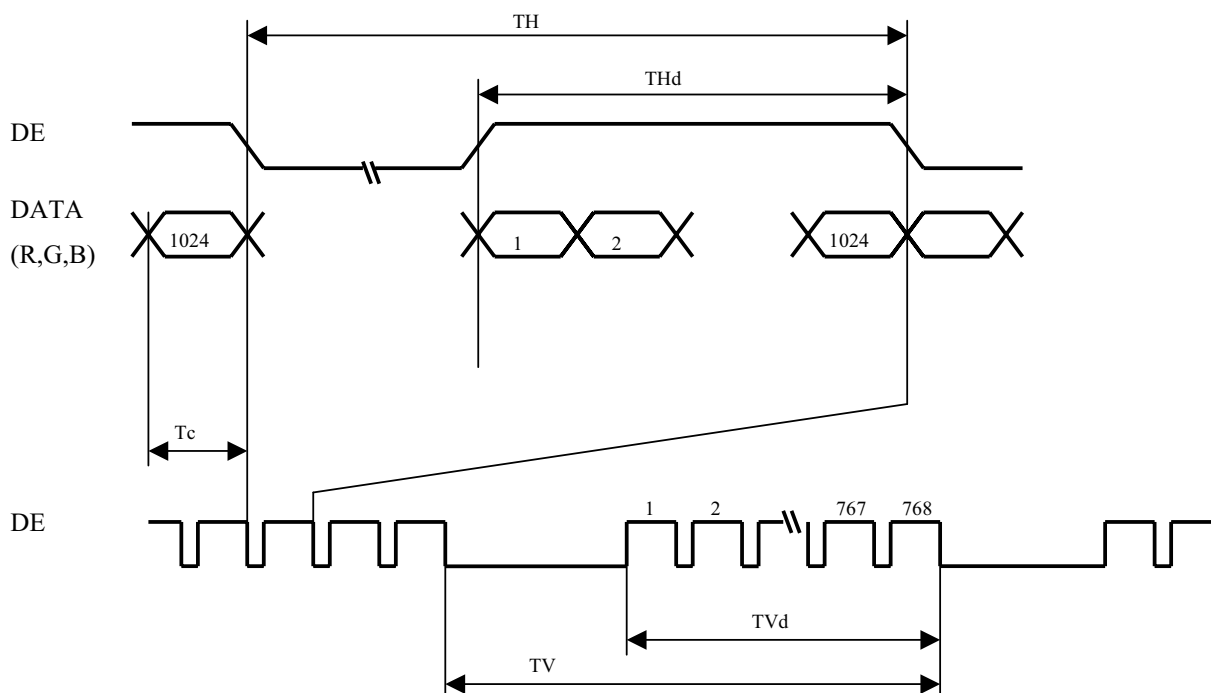

## 7-2 Input Data Signals and Display Position on the screen

Graphics and texts can be displayed on a  $1024 \times \text{RGB} \times 768$  dots panel with 16M colors by supplying 24 bit data signal (8bit/color [253 gray scales]  $\times 3$  ).

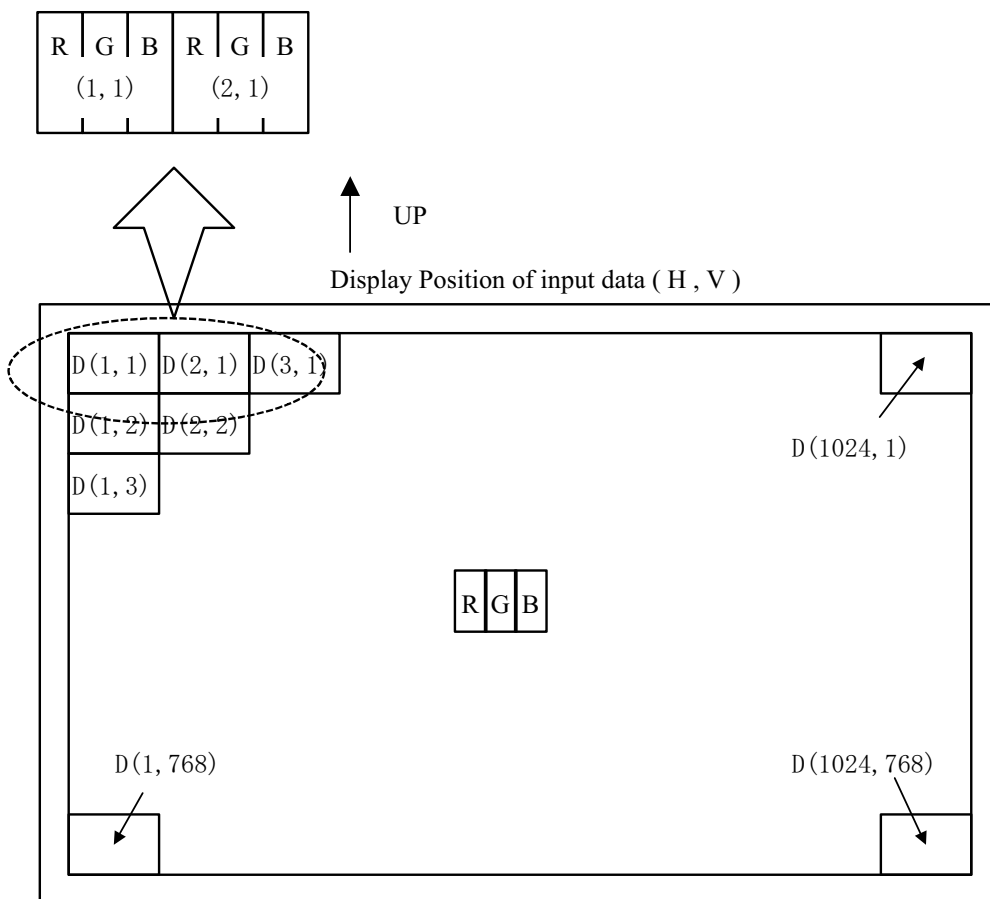

## 8. Input Signals, Basic Display Colors and Gray Scale of Each Color

## 8-1. 8bit input

|                     | Colors &<br>Gray scale | Data signal   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |  |  |
|---------------------|------------------------|---------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|--|--|
|                     |                        | Gray<br>Scale | R0 | R1 | R2 | R3 | R4 | R5 | R6 | R7 | G0 | G1 | G2 | G3 | G4 | G5 | G6 | G7 | B0 | B1 | B2 | B3 | B4 | B5 | B6 | B7 |   |  |  |
| Basic Color         | Black                  | —             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | Blue                   | —             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 1 |  |  |
|                     | Green                  | —             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | Cyan                   | —             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 1 |  |  |
|                     | Red                    | —             | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | Magenta                | —             | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 1 |  |  |
|                     | Yellow                 | —             | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | White                  | —             | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 1 |  |  |
| Gray Scale of Red   | Black                  | GS0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | ↑                      | GS1           | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | Darker                 | GS2           | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | ↑                      | ↓             | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    |   |  |  |
|                     | ↓                      | ↓             | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    |   |  |  |
|                     | Brighter               | GS250         | 1  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | ↓                      | GS251         | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | Red                    | GS252         | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
| Gray Scale of Green | Black                  | GS0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | ↑                      | GS1           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | Darker                 | GS2           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | ↑                      | ↓             | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    |   |  |  |
|                     | ↓                      | ↓             | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    |   |  |  |
|                     | Brighter               | GS250         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
|                     | ↓                      | GS251         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | Green                  | GS252         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0 |  |  |
| Gray Scale of Blue  | Black                  | GS0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | ↑                      | GS1           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | Darker                 | GS2           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |   |  |  |
|                     | ↑                      | ↓             | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    |   |  |  |
|                     | ↓                      | ↓             | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    | ↓  |    |    |    |    |    |    |    |   |  |  |
|                     | Brighter               | GS250         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |   |  |  |
|                     | ↓                      | GS251         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 0  | 1  | 1  | 1  | 1  | 1  |   |  |  |
|                     | Blue                   | GS252         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | X  | X  | 1  | 1  | 1  | 1  | 1  | 1  |   |  |  |

0 : Low level voltage,      1 : High level voltage.      X :Don't care.

Each basic color can be displayed in 253 gray scales from 8 bit data signals. According to the combination of total 24 bit data signals, the 16-million-color display can be achieved on the screen.

## 8-2 6bit input

|                     | Colors &<br>Gray scale | Data signal   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|------------------------|---------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|                     |                        | Gray<br>Scale | R0 | R1 | R2 | R3 | R4 | R5 | G0 | G1 | G2 | G3 | G4 | G5 | B0 | B1 | B2 | B3 | B4 | B5 |
| Basic Color         | Black                  | —             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Blue                   | —             | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                     | Green                  | —             | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Cyan                   | —             | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
|                     | Red                    | —             | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Magenta                | —             | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |
|                     | Yellow                 | —             | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | White                  | —             | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| Gray Scale of Red   | Black                  | GS0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↑                      | GS1           | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Darker                 | GS2           | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↑                      | ↓             | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                     | ↓                      | ↓             | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                     | Brighter               | GS61          | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↓                      | GS62          | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Red                    | GS63          | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray Scale of Green | Black                  | GS0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↑                      | GS1           | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Darker                 | GS2           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↑                      | ↓             | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                     | ↓                      | ↓             | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                     | Brighter               | GS61          | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↓                      | GS62          | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | Green                  | GS63          | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  |
| Gray Scale of Blue  | Black                  | GS0           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
|                     | ↑                      | GS1           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  | 0  |
|                     | Darker                 | GS2           | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 0  | 0  | 0  |
|                     | ↑                      | ↓             | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                     | ↓                      | ↓             | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    | ↓  |    |    |    |    |    |
|                     | Brighter               | GS61          | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 0  | 1  | 1  | 1  | 1  |
|                     | ↓                      | GS62          | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  |
|                     | Blue                   | GS63          | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 1  | 1  | 1  | 1  | 1  | 1  |

0 : Low level voltage, 1 : High level voltage.

Each basic color can be displayed in 64 gray scales from 6 bit data signals. According to the combination of total 18 bit data signals, the 262,144-color display can be achieved on the screen.

## 9. Optical Characteristics

Ta=25°C, Vcc =+3.3V

| Parameter                 |            | Symbol                   | Condition            | Min.  | Typ.  | Max. | Unit              | Remark                          |
|---------------------------|------------|--------------------------|----------------------|-------|-------|------|-------------------|---------------------------------|
| Viewing<br>angle<br>range | Vertical   | $\theta$ 11              | $CR \geq 5$          | 40    | 55    | —    | Deg.              |                                 |
|                           |            | $\theta$ 12              |                      | 70    | 80    | —    | Deg.              |                                 |
|                           | Horizontal | $\theta$ 21, $\theta$ 22 |                      | 70    | 80    | —    | Deg.              |                                 |
|                           | Vertical   | $\theta$ 11              | $CR \geq 10$         | 30    | 45    | —    | Deg.              |                                 |
|                           |            | $\theta$ 12              |                      | 45    | 55    | —    | Deg.              |                                 |
|                           | Horizontal | $\theta$ 21, $\theta$ 22 |                      | 50    | 60    | —    | Deg.              |                                 |
| Contrast ratio            |            | C R                      | $\theta = 0^{\circ}$ | 250   | 350   | —    | —                 | 【Note2,4】                       |
| Response time             |            | $\tau$ d+ $\tau$ r       | $\theta = 0^{\circ}$ | —     | 30    | 60   | ms                | 【Note3,4】                       |
| Chromaticity of<br>White  | Wx         | $\theta = 0^{\circ}$     | 0.283                | 0.313 | 0.343 | —    | 【Note4】           |                                 |
|                           | Wy         |                          | 0.299                | 0.329 | 0.359 | —    |                   |                                 |
| Chromaticity of<br>Red    | Rx         | $\theta = 0^{\circ}$     | 0.551                | 0.581 | 0.611 | —    |                   |                                 |
|                           | Ry         |                          | 0.292                | 0.322 | 0.352 | —    |                   |                                 |
| Chromaticity of<br>Green  | Gx         | $\theta = 0^{\circ}$     | 0.277                | 0.307 | 0.337 | —    |                   |                                 |
|                           | Gy         |                          | 0.516                | 0.546 | 0.576 | —    |                   |                                 |
| Chromaticity of<br>Blue   | Bx         | $\theta = 0^{\circ}$     | 0.121                | 0.151 | 0.181 | —    |                   |                                 |
|                           | By         |                          | 0.097                | 0.127 | 0.157 | —    |                   |                                 |
| Luminance of white        |            | Y <sub>L</sub>           | $\theta = 0^{\circ}$ | 500   | 600   | —    | cd/m <sup>2</sup> | IL=6.0mArms, f=60kHz<br>【Note4】 |
| White Uniformity          |            | $\delta$ w               | $\theta = 0^{\circ}$ | —     | —     | 1.25 | —                 | 【Note5】                         |

※The measurement shall be executed 30 minutes after lighting at rating.

The optical characteristics shall be measured in a dark room or equivalent state with the method shown in Fig.2 below.

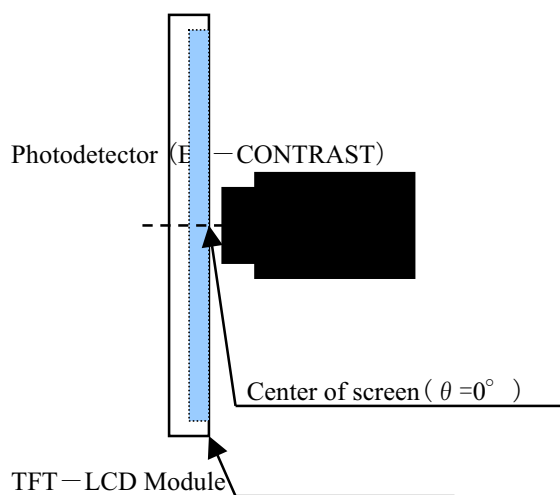


Fig2-1 Viewing angle measurement method


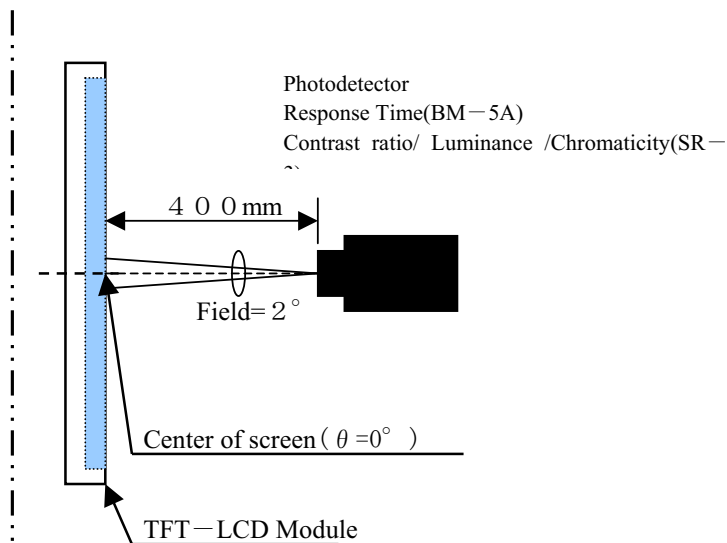


Fig2-2 Luminance/Contrast ratio/Response time/Chromaticity measurement method

Fig2 Optical characteristics measurement method

【Note1】 Definitions of viewing angle range:

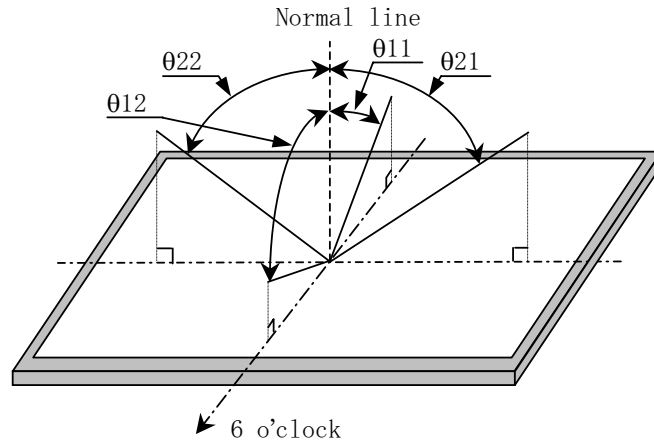


【Note2】 Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

【Note3】 Definition of response time:


The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

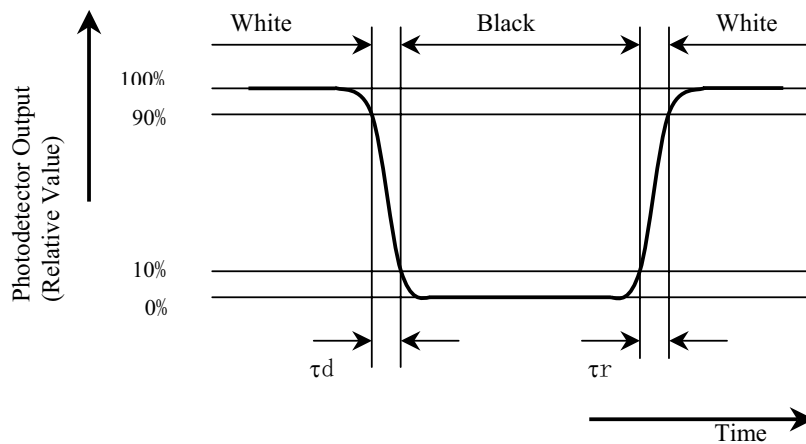

【Note4】 This shall be measured at center of the screen.

【Note5】 Definition of white uniformity:

White uniformity is defined as the following with five measurements (A~E).

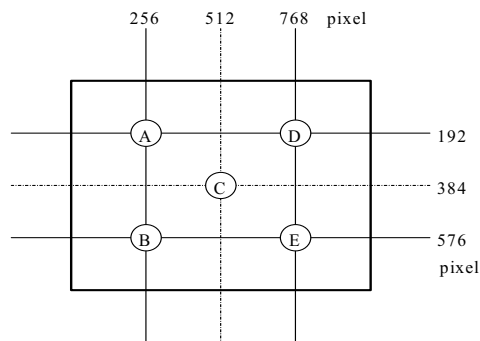

$$\delta_w = \frac{\text{Maximum Luminance of five points (brightness)}}{\text{Minimum Luminance of five points (brightness)}}$$

#### 10. Handling Precautions

- a) Be sure to turn off the power supply when inserting or disconnecting the cable.
- b) Be sure to design the cabinet so that the module can be installed without any extra stress such as warp or twist.
- c) Since the front polarize is easily damaged, pay attention not to scratch it.
- d) Since long contact with water may cause discoloration or spots, wipe off water drop immediately.
- e) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- f) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface. Handle with care.
- g) Since CMOS LSI is used in this module, take care of static electricity and take the human earth into consideration when handling.
- h) Make sure the four mounting holes of the module are grounded sufficiently. Take electro-magnetic interference (EMI) into consideration.
- i) The module has some printed circuit boards (PCBs) on the back side. Take care to keep them from any stress or pressure when handling or installing the module; otherwise some of electronic parts on the PCBs may be damaged.
- j) Observe all other precautionary requirements in handling components.
- k) Since it is necessary to remove the screw on the back of a module before performing lamp exchange, please take a cabinet design into consideration.
- l) When some pressure is added onto the module from rear side constantly, it causes display non-uniformity issue, functional defect, etc. So, please avoid such design.
- m) When handling LCD modules and assembling them into cabinets, please be noted that long-term storage in the environment of oxidization or deoxidization gas and the use of such materials as reagent, solvent, adhesive, resin, etc. which generate these gasses, may cause corrosion and discoloration of the LCD modules.

## 11. Packing form

- a) Piling number of cartons : maximum 5 cartons
- b) Packing quantity in one carton : 5 module
- c) Carton size : 319mm(W) × 402mm(D) × 280mm(H)
- d) Total mass of one carton filled with full modules : 8.0kg.Max
- e) Packing form is shown in Fig.3

## 12. Reliability test items

| No | Test item                                       | Conditions                                                                                                                                                                                                           |                   |
|----|-------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|
| 1  | High temperature storage test                   | Ta = 70°C 240H                                                                                                                                                                                                       |                   |
| 2  | Low temperature storage test                    | Ta = -30°C 240H                                                                                                                                                                                                      |                   |
| 3  | High temperature & high humidity operation test | Ta = 40°C , 95%RH 240H<br>(No condensation)                                                                                                                                                                          |                   |
| 4  | High temperature operation test                 | Tp = 60°C 240H<br>(Tp: The temperature of panel surface)                                                                                                                                                             |                   |
| 5  | Low temperature operation test                  | Tp = 0°C 240H                                                                                                                                                                                                        |                   |
| 6  | Vibration test                                  | Waveform : Sine wave<br>Frequency : 10~57Hz/Vibration width (one side) : 0.075mm<br>: 58~500Hz/Gravity : 9.8m/s <sup>2</sup><br>Sweep time : 11minutes<br>Test period : 3 hours (1 hour for each direction of X,Y,Z) | 【Note】            |
| 7  | Shock test                                      | Max. gravity : 490m/s <sup>2</sup><br>Pulse width : 11ms, sine wave<br>Direction : ±X, ±Y, ±Z, once for each direction.                                                                                              | 【Note】            |
| 8  | Thermal shock test (non- operating)             | Ta=-30°C~70°C ; 5 cycles<br>Test period : 10 hours (1 hour for each temperature)                                                                                                                                     |                   |
| 9  | Altitude                                        | Ta=50°C,70kPa,3,048m(10,000ft), t=24H (Operating)<br>Ta=70°C,12kPa,15,240m(50,000ft), t=24H (Storage)                                                                                                                |                   |
| 10 | ESD test                                        | Contact discharge (150pF 330Ω)<br>non-operating = ±10kV, operating = ±8kV<br>Atmospheric discharge (150pF 330Ω)<br>non-operating = ±20kV, operating = ±15kV                                                          |                   |
| 11 | EMI                                             | Measurement in 10m site<br>Display position on the screen = "H" (full-screen),<br>GND to 4 place = un-connect, Vcc / Vsignal = typ.                                                                                  | VCCI<br>(Class B) |

## 【Note】


A gap of panel shall not occur by vibration or the shock.

## 【Result Evaluation Criteria】


Under the display quality test conditions with normal operation state, these shall be no change which may affect practical display function.

## 13. Others

## 1) Lot No. and indication Bar Code Label:

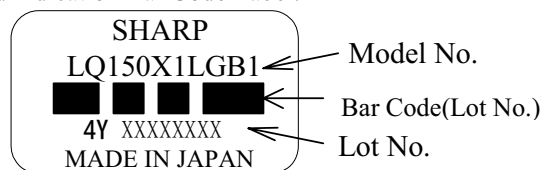

How to express Lot No.

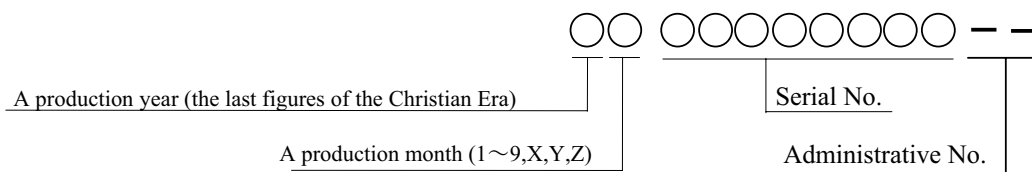

## 2) Packing Label

|                                |                             |
|--------------------------------|-----------------------------|
| 社内品番: (4 S) <b>LQ150X1LGB1</b> |                             |
| Bar code (①)                   |                             |
| Lot NO.                        | : (1 T) 2 0 0 4 . 1 1 . 0 1 |
| Bar code (②)                   |                             |
| Quantity: (Q)                  | p c s                       |
| Bar code (③)                   |                             |
| ユーザ品番                          | :                           |
| シャープ物流用ラベルです。                  |                             |

① Model No. (LQ150X1LGB1)

② Lot No. (Date)

③ Quantity

3) Adjusting volume have been set optimally before shipment, so do not change any adjusted value.

If adjusted value is changed, the specification may not be satisfied.

4) Disassembling the module can cause permanent damage and should be strictly avoided.

5) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.

6) The chemical compound which causes the destruction of ozone layer is not being used.

7) Warning of mercury and material information of LPG (Light Pipe Guide) are labeled on the back of the module.

**MATERIAL INFORMATION**  
**>PLASTIC LIGHT GUIDE:PMMA<**

8) Cold cathode fluorescent lamp in LCD PANEL contains a small amount of mercury, Please follow local ordinances or regulations for disposal. (put on the back of the module. )



COLD CATHODE FLUORESCENT LAMP IN LCD PANEL  
 CONTAINS A SMALL AMOUNT OF MERCURY, PLEASE  
 FOLLOW LOCAL ORDINANCES OR REGULATION FOR DISPOSAL  
 当該液晶ディスプレイパネルは蛍光管が組み込まれていますので、地方  
 自治体の条例、または、規則に従って廃棄ください。

9) This specification document's Japanese language version is also available. Its Number (SPEC.No.) is LD-16Y03.

10) When any question or issue occurs, it shall be solved by mutual discussion.

## 14. Carton storage condition

|                       |                                                                                                                                                                                                                                                        |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature           | 0°C to 40°C                                                                                                                                                                                                                                            |
| Humidity              | 95%RH or less                                                                                                                                                                                                                                          |
| Reference condition : | 20°C to 35°C , 85%RH or less (summer)<br>: 5°C to 15°C , 85%RH or less (winter)<br>• the total storage time (40°C,95%RH) : 240H or less                                                                                                                |
| Sunlight              | Be sure to shelter a product from the direct sunlight.                                                                                                                                                                                                 |
| Atmosphere            | Harmful gas, such as acid and alkali which bites electronic components and/or wires must not be detected.                                                                                                                                              |
| Notes                 | Be sure to put cartons on palette or base, don't put it on floor, and store them with removing from wall<br>Please take care of ventilation in storehouse and around cartons, and control changing temperature is within limits of natural environment |
| Storage period        | 1 year                                                                                                                                                                                                                                                 |

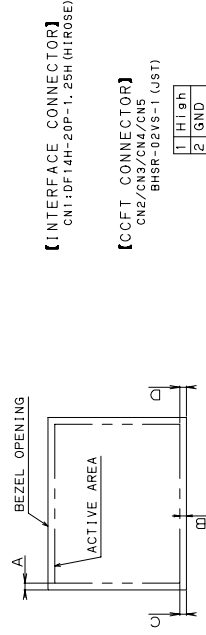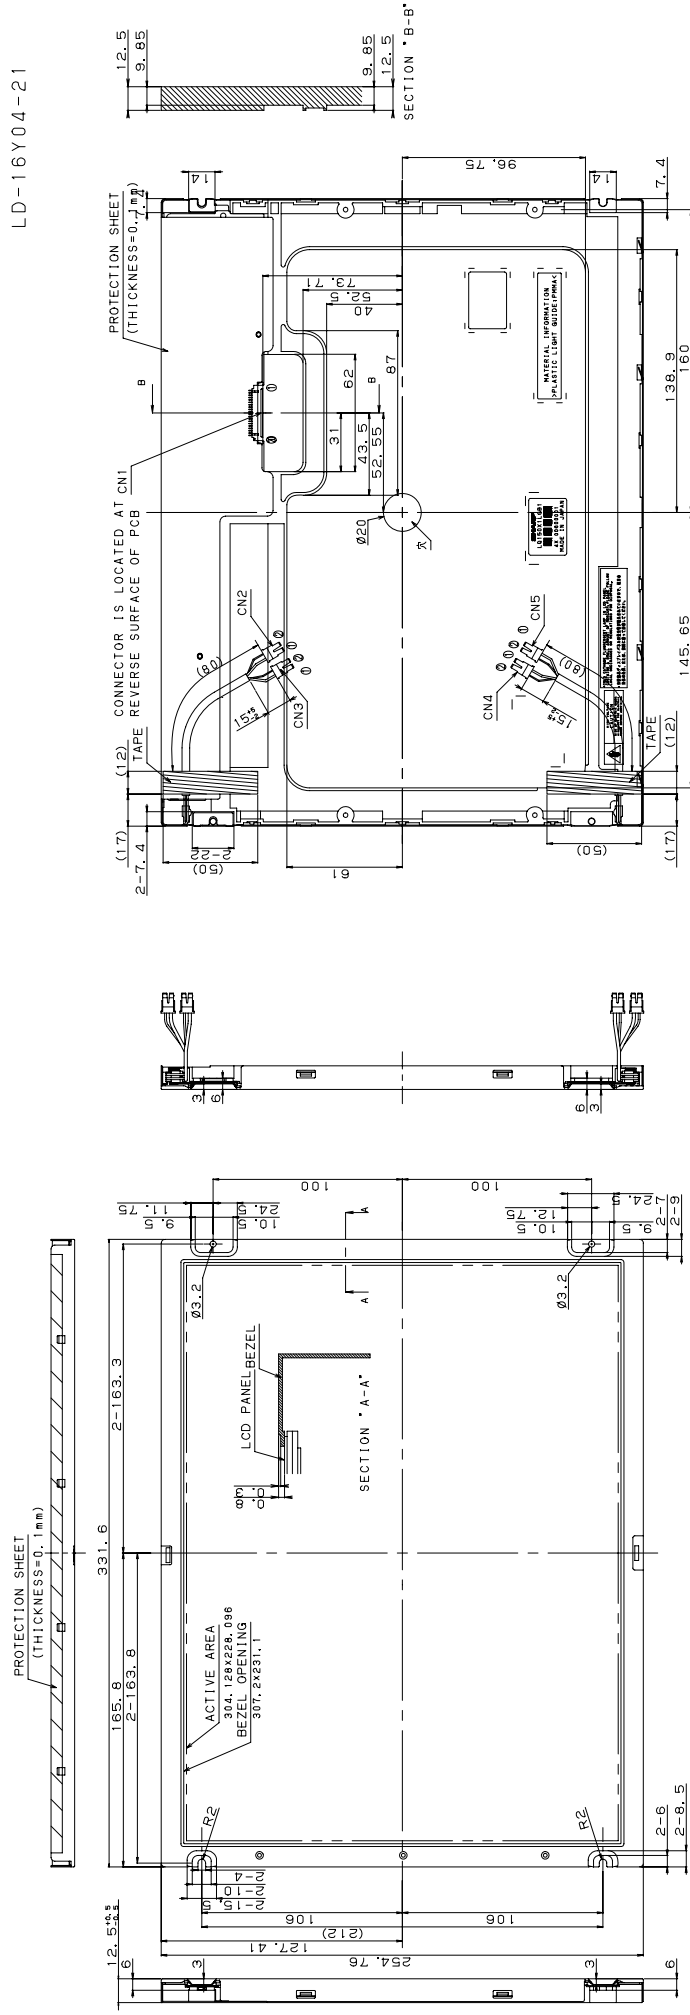

【INTERFACE CONNECTOR】  
CN1:DF14H-20P-1.25H (HIROSE)

【CCFT CONNECTOR】  
CN2/CN3/CN4/CN5  
BHSR-02VS-1 (JST)

|   |      |
|---|------|
| 1 | High |
| 2 | GND  |

- NOTES
1. UNSPECIFIED TOLERANCE TO BE ±0.5
  2. WARP AND FLATTING FOR PCB AND CHASSIS ARE EXCLUDED FROM THICKNESS AND DIMENSION OF THE UNIT.
  3. THE THICKNESS IS EXCEPT FOR PORTION OF PROTECTION SHEET.
  4. GAP BETWEEN BEZEL AND LCD PANEL ≤0.5

Fig. 1:LQ150X1LGB1 OUTLINE DIMENSIONS

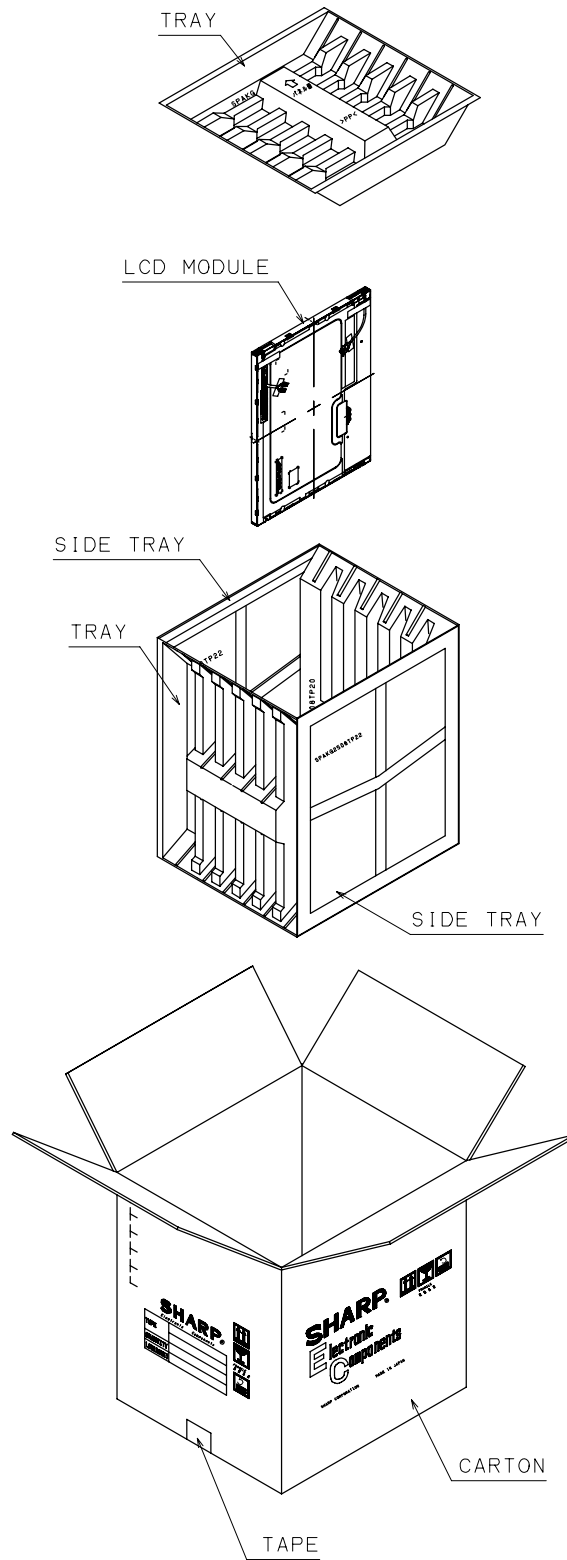


Fig. 3: PACKING FORM

## NOTICE

This publication is the proprietary of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.

The application circuit examples in this publication are provided to explain the representative applications of SHARP's devices and are not intended to guarantee any circuit design or permit any industrial property right or other rights to be executed. SHARP takes no responsibility for any problems related to any industrial property right or a third party resulting from the use of SHARP's devices, except for those resulting directly from device manufacturing processes.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP's device.

SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact SHARP in order to obtain the latest specification sheets before using any SHARP's device. Manufacturing locations are also subject to change without notice.

Observe the following points when using any device in this publication. SHARP takes no responsibility for damage caused by improper use *of the devices*.

The appropriate design measures should be taken to ensure reliability and safety when SHARP's devices are used for equipment such as:

- Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
- Traffic signals
- Alarm equipment
- Gas leakage sensor breakers
- Various safety devices etc.

SHARP's devices shall not be used for equipment that requires extremely high level of reliability, such as:

- Military and space applications
- Medical equipment for life support
- Nuclear power control equipment

Contact a SHARP representative, in advance, when intending to use SHARP's devices for any "specific" applications other than those recommended by SHARP.

Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

**SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.**

Suggested applications (if any) are for standard use; See Important Restrictions for limitations on special applications. See Limited Warranty for SHARP's product warranty. The Limited Warranty is in lieu, and exclusive of, all other warranties, express or implied. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR USE AND FITNESS FOR A PARTICULAR PURPOSE, ARE SPECIFICALLY EXCLUDED. In no event will SHARP be liable, or in any way responsible, for any incidental or consequential economic or property damage.

---



---

**NORTH AMERICA**

SHARP Microelectronics of the Americas  
5700 NW Pacific Rim Blvd.  
Camas, WA 98607, U.S.A.  
Phone: (1) 360-834-2500  
Fax: (1) 360-834-8903  
Fast Info: (1) 800-833-9437  
[www.sharpsma.com](http://www.sharpsma.com)

---

**EUROPE**

SHARP Microelectronics Europe  
Division of Sharp Electronics (Europe) GmbH  
Sonninstrasse 3  
20097 Hamburg, Germany  
Phone: (49) 40-2376-2286  
Fax: (49) 40-2376-2232  
[www.sharpsme.com](http://www.sharpsme.com)

---

**JAPAN**

SHARP Corporation  
Electronic Components & Devices  
22-22 Nagaike-cho, Abeno-Ku  
Osaka 545-8522, Japan  
Phone: (81) 6-6621-1221  
Fax: (81) 6117-725300/6117-725301  
[www.sharp-world.com](http://www.sharp-world.com)

---

**TAIWAN**

SHARP Electronic Components  
(Taiwan) Corporation  
8F-A, No. 16, Sec. 4, Nanking E. Rd.  
Taipei, Taiwan, Republic of China  
Phone: (886) 2-2577-7341  
Fax: (886) 2-2577-7326/2-2577-7328

---

**SINGAPORE**

SHARP Electronics (Singapore) PTE., Ltd.  
438A, Alexandra Road, #05-01/02  
Alexandra Technopark,  
Singapore 119967  
Phone: (65) 271-3566  
Fax: (65) 271-3855

---

**KOREA**

SHARP Electronic Components  
(Korea) Corporation  
RM 501 Geosung B/D, 541  
Dohwa-dong, Mapo-ku  
Seoul 121-701, Korea  
Phone: (82) 2-711-5813 ~ 8  
Fax: (82) 2-711-5819

---

**CHINA**

SHARP Microelectronics of China  
(Shanghai) Co., Ltd.  
28 Xin Jin Qiao Road King Tower 16F  
Pudong Shanghai, 201206 P.R. China  
Phone: (86) 21-5854-7710/21-5834-6056  
Fax: (86) 21-5854-4340/21-5834-6057

**Head Office:**

No. 360, Bashen Road,  
Xin Development Bldg. 22  
Waigaoqiao Free Trade Zone Shanghai  
200131 P.R. China  
Email: [smc@china.global.sharp.co.jp](mailto:smc@china.global.sharp.co.jp)

---

**HONG KONG**

SHARP-ROXY (Hong Kong) Ltd.  
3rd Business Division,  
17/F, Admiralty Centre, Tower 1  
18 Harcourt Road, Hong Kong  
Phone: (852) 28229311  
Fax: (852) 28660779  
[www.sharp.com.hk](http://www.sharp.com.hk)

**Shenzhen Representative Office:**

Room 13B1, Tower C,  
Electronics Science & Technology Building  
Shen Nan Zhong Road  
Shenzhen, P.R. China  
Phone: (86) 755-3273731  
Fax: (86) 755-3273735

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sharp Microelectronics:](#)

[LQ150X1LGB1](#)