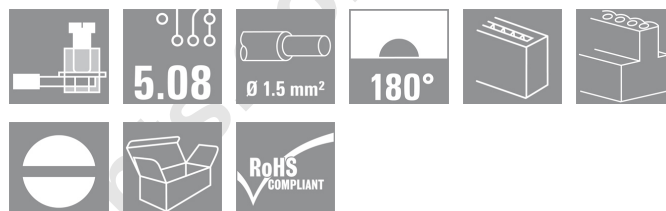


BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX**onlinecomponents.com**
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Female plugs with clamping-yoke screw for wire connection with straight (180°) outlet direction. The female plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	1527460000
Type	BLZ 5.08/12/180 SN OR BX
Version	PCB plug-in connector, female plug, No. of poles: 12, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box
Product data	IEC: 400 V / 19 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12
GTIN (EAN)	4008190121648
Packaging	Box
Qty.	40 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data
System parameters

Product family	BL/SL 5.08 series	Conductor connection system	Clamping yoke connection
Outgoing direction of conductor	180°	Pitch in inches (P)	0.2 inch
No. of poles	12	Number of rows	1
Screwdriver blade	0.6 x 3.5	Screwdriver blade standard	DIN 5264
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.5 Nm
Clamping screw	M 2.5	Stripping length	7 mm
L1 in mm	55.88 mm	L1 in inches	2.2 inch
Touch-safe protection acc. to DIN VDE 0470	IP 20	Touch-safe protection acc. to DIN VDE 57	106
			Safe from finger touch

Material data

Insulating material	PBT	Colour	Orange
Colour chart	Similar to RAL 2000	Flammability class UL 94	V-0
CTI	≥ 200	Contact material	Copper alloy
Contact surface	tinned	Contact base material	Copper alloy
Continuous operating temp., min.	-25 °C	Continuous operating temp., max.	100 °C

Connectable conductors

Clamping range, rated connection, min.	0.13 mm ²	Clamping range, rated connection, max.	3.31 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12
Solid, min. H05(07) V-U	0.2 mm ²	Solid, max. H05(07) V-U	2.5 mm ²
Flexible, min. H05(07) V-K	0.2 mm ²	Flexible, max. H05(07) V-K	2.5 mm ²
w. wire end ferrule, DIN 46228 pt 1, min.	0.2 mm ²	w. wire end ferrule, DIN 46228 pt 1, max.	2.5 mm ²
w. plastic collar ferrule, DIN 46228 pt 4, min.	0.2 mm ²	w. plastic collar ferrule, DIN 46228 pt 4, max.	2.5 mm ²
Plug gauge acc. to EN 60999 a x b; Ø	2.8 mm x 2.0 mm; 2.4 mm		

DIN IEC rating data

Rated current, min. no. of poles (Tu=20°C)	19 A	Rated current, max. no. of poles (Tu=20°C)	14.5 A
Rated current, number of poles (Tu=40°C), min	16 A	Rated current, number of poles (Tu=40°C), max.	12.5 A
Rated voltage for surge voltage class / pollution degree II/2	400 V	Rated voltage for surge voltage class / pollution degree III/2	320 V
Rated voltage for surge voltage class / pollution degree III/3	250 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	4 kV
Rated impulse voltage for surge voltage class/ pollution degree III/2	4 kV	Rated impulse voltage for surge voltage class/ contamination degree III/3	4 kV
Short-time withstand current resistance	3 x 1s with 120 A		

CSA rating data

Institute (CSA)		Rated voltage (Use group B)	300 V
Rated current (use group B)	15 A	Rated voltage (use group D)	300 V
Rated current (use group D)	10 A	Wire cross-section, AWG, min.	AWG 26
Wire cross-section, AWG, max.	AWG 12		

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Technical data
UL 1059 rating data

Institute (UR)



Rated voltage (use group B)

300 V

Rated current (use group B) 15 A

Rated voltage (use group D) 300 V

Rated current (use group D) 10 A

Wire cross-section, AWG, min. AWG 26

Wire cross-section, AWG, max. AWG 12

Classifications

ETIM 3.0	EC001284	UNSPSC	30-21-18-10
eClass 4.1	27-26-07-01	eClass 5.1	27-26-07-04
eClass 6.0	27-26-07-04	eClass 7.0	27-44-04-02

Notes

Notes

- Additional colours on request
- Gold-plated contact surfaces on request
- Rated current related to rated cross-section and min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drg. = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.

Approvals

Approvals

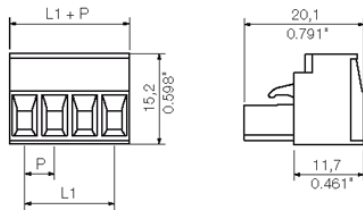


BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Drawings



BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLS 5.08/180FI


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1846310000	SLS 5.08/12/180FI SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² / UL: 300 V / 15 A / AWG 26 - AWG 12	4032248362592	Box	50 pc(s).

SLZF 5.08/90B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1673650000	SLZF 5.08/12/90B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 90°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 20.5 A / 0.2 - 2.5 mm ² / UL: 300 V / 15 A / AWG 26 - AWG 12	4008190435363	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLS 5.08/180F


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1846460000	SLS 5.08/12/180F SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 21.5 A / 4032248362769 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12		Box	50 pc(s).

SL-SMT 5.08/90LF Box



High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1775332001	SL-SMT 5.08/12/90LF 1.5SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248157310	Box	50 pc(s).
1780510000	SL-SMT 5.08/12/90LF 3.2SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248165834	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SL 5.08/90B


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1511360000	SL 5.08/12/90B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 12, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190015985	Box	50 pc(s).

SL 5.08/135B


Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1605630000	SL 5.08/12/135B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 12, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 17 A UL: 300 V / 15 A	4008190068738	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLDV-THR 5.08/180F


High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1828870000	SLDV-THR 5.08/24/180F 3.2SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 24, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 15 A UL: 300 V / 10 A	4032248335565	Box	10 pc(s).
1828990000	SLDV-THR 5.08/24/180F 1.5SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 24, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 15 A UL: 300 V / 10 A	4032248335688	Box	10 pc(s).

SLZF 5.08/180F


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1847080000	SLZF 5.08/12/180F SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm², Box	IEC: 400 V / 23 A / 0.2 - 2.5 mm² UL: 300 V / 15 A / AWG 26 - AWG 12	4032248363216	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SL 5.08/180B


Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1520560000	SL 5.08/12/180B 3.2 SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.08 mm, No. of poles: 12, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190169077	Box	50 pc(s).

SLZF 5.08/180FI


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1846610000	SLZF 5.08/12/180FI SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	4032248362912	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLS 5.08TB KF35


Male plugs with clamping-yoke screw wire-connect system. With clip-on feet for attaching the male plugs on rail. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1846170000	SLS 5.08/12/180TB KF SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² / UL: 300 V / 15 A / AWG 26 - AWG 12	4032248362455	Box	10 pc(s).

SLS 5.08TB RF15


Male plugs with clamping-yoke screw wire-connect system. With clip-on feet for attaching the male plugs on rail. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1846090000	SLS 5.08/12/180TB RF15 SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² / UL: 300 V / 15 A / AWG 26 - AWG 12	4032248362370	Box	10 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 5.08/180LF Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1838540000	SL-SMT 5.08/12/180LF 3.2SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 12, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248348602	Box	50 pc(s).
1776462001	SL-SMT 5.08/12/180LF 1.5SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 12, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248159345	Box	50 pc(s).

SL-SMT 5.08/90F Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1837730000	SL-SMT 5.08/12/90F 3.2SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248347544	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLT 5.08B


Male plugs with screw TOP wire connection. The male plug provides space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 16 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1611810000	SLT 5.08/12/180B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, TOP connection, Clamping range, rated connection, max.: 2.5 mm ² , Box	IEC: 400 V / 16 A / 0.2 - 2.5 mm ² UL: 300 V / 10 A / AWG 26 - AWG 14	4008190192693	Box	50 pc(s).

SL-SMT 5.00/90LF Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1840450000	SL-SMT 5.00/12/90LF 3.2SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248351299	Box	50 pc(s).
1797330000	SL-SMT 5.00/12/90LF 1.5SN BK BX	PCB plug-in connector, male header, Solder flange, Reflow solder connection, 5.00 mm, No. of poles: 12, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248238118	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com


Mating connector (conditionally pluggable)
SLZF 5.08/270B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1706240000	SLZF 5.08/12/270B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 270°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 20.5 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	4032248197736	Box	50 pc(s).

SLS 5.08/180B


Male plugs with clamping-yoke screw wire-connect system. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 12 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 21.5 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1627340000	SLS 5.08/12/180B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Clamping yoke connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 21.5 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	4008190199852	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLDV-THR 5.08/180FLF


High-temperature resistant, double level, laterally offset, male connector with flange or solder flange. 1.5 mm solder pin is suitable for reflow soldering. 3.2 mm solder pin suitable for reflow and wave soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1829230000	SLDV-THR 5.08/24/180FLF 1.5SN BK BX	PCB plug-in connector, male header, Flange / Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 24, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 15 A UL: 300 V / 10 A	4032248335923	Box	10 pc(s).
1829110000	SLDV-THR 5.08/24/180FLF 3.2SN BK BX	PCB plug-in connector, male header, Flange / Solder flange, Reflow solder connection, 5.08 mm, No. of poles: 24, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 15 A UL: 300 V / 10 A	4032248335800	Box	10 pc(s).

SL 5.00/90B



Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1580960000	SL 5.00/12/90B 3.2SN OR BX	PCB plug-in connector, male header, Dovetails for fixing blocks, Solder connection, 5.00 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190071851	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SLZF 5.08/180B


Male plugs with tension-clamp wire connection. The male plugs provide space for labelling and can be coded.

- 0.2 - 2.5 mm² (IEC) / 26 - 14 AWG (UL)
- 400 V (IEC) / 300 V (UL)
- 23 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1710310000	SLZF 5.08/12/180B SN OR BX	PCB plug-in connector, male plug, 5.08 mm, No. of poles: 12, 180°, Tension clamp connection, Clamping range, rated connection, max.: 3.31 mm ² , Box	IEC: 400 V / 23 A / 0.2 - 2.5 mm ² UL: 300 V / 15 A / AWG 26 - AWG 12	4008190319625	Box	50 pc(s).

SL-SMT 5.08/180F Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1820630000	SL-SMT 5.08/12/180F 3.2SN BK BX	PCB plug-in connector, male header, Flange, Reflow solder connection, 5.08 mm, No. of poles: 12, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248316595	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (fully pluggable)
SL-SMT 5.08/90G Box


High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1780280000	SL-SMT 5.08/12/90G 3.2SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248165605	Box	50 pc(s).
1775102001	SL-SMT 5.08/12/90G 1.5SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248156573	Box	50 pc(s).

SL-SMT 5.08/90 Box


High-temperature-resistant, 90° angled, open male header
 Packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1774862001	SL-SMT 5.08/12/90 1.5SN BK BX	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248155903	Box	50 pc(s).
1780050000	SL-SMT 5.08/12/90 3.2SN BK BX	PCB plug-in connector, male header, open side, Reflow solder connection, 5.08 mm, No. of poles: 12, 90°, Solder	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248165377	Box	50 pc(s).

BL/SL 5.08 series BLZ 5.08/12/180 SN OR BX

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-2083
www.weidmueller.com

Mating connector (fully pluggable)

pin length (l): 3.2 mm, tinned,
Black, Box

SL-SMT 5.08/180G Box



High-temperature-resistant male header, packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1776022001	SL-SMT 5.08/12/180G 1.5SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 12, 180°, Solder pin length (l): 1.5 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248159017	Box	50 pc(s).
1838310000	SL-SMT 5.08/12/180G 3.2SN BK BX	PCB plug-in connector, male header, closed side, Reflow solder connection, 5.08 mm, No. of poles: 12, 180°, Solder pin length (l): 3.2 mm, tinned, Black, Box	IEC: 400 V / 19 A UL: 300 V / 15 A	4032248348374	Box	50 pc(s).

SL 5.08/135




Male connectors with 135° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 17 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1603160000	SL 5.08/12/135 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 12, 135°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 17 A UL: 300 V / 15 A	4008190094638	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (fully pluggable)
SLDF 5.08


Male connector for through-panel mounting with optional locking function. Internal connection as flat-blade or solder connection. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 15 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1599230000	SLDF 5.08 L/F 12 SN OR BX	PCB plug-in connector, male	IEC: 400 V / 15 A	4008190155100	Box	50
		header, 5.08 mm, No. of poles: UL: 300 V / 10 A				pc(s).
		12, 180°, Box				

SL-SMT 5.08/180 Box


High-temperature-resistant, straight, open ended male header. Packed in box or tape. In tape with 1.5 mm solder pin optimised for automatic assembly. 3.2 mm solder pin suitable for reflow and wave soldering. These male connectors provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 19 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1838080000	SL-SMT 5.08/12/180 3.2SN BK BX	PCB plug-in connector, male	IEC: 400 V / 19 A	4032248348145	Box	50
		header, open side, Reflow	UL: 300 V / 15 A			pc(s).
		solder connection, 5.08 mm,				
		No. of poles: 12, 180°, Solder				
		pin length (l): 3.2 mm, tinned,				
		Black, Box				
1775702001	SL-SMT 5.08/12/180 1.5SN BK BX	PCB plug-in connector, male	IEC: 400 V / 19 A	4032248158348	Box	50
		header, open side, Reflow	UL: 300 V / 15 A			pc(s).
		solder connection, 5.08 mm,				
		No. of poles: 12, 180°, Solder				
		pin length (l): 1.5 mm, tinned,				
		Black, Box				

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (fully pluggable)
SL 5.08/90


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1509060000	SL 5.08/12/90 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190105983	Box	50 pc(s).

SLD 5.08/90G


2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1601890000	SLD 5.08/24/90G 3.2SN OR BX	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 24, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 11 A UL: 300 V / 10 A	4008190132835	Box	10 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com


Mating connector (fully pluggable)
SL 5.00/90


Male connectors with 90° outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1571110000	SL 5.00/12/90 3.2SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.00 mm, No. of poles: 12, 90°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190140106	Box	50 pc(s).
1626080000	SL 5.00/12/90 4.5SN BK BX	PCB plug-in connector, male header, open side, Solder connection, 5.00 mm, No. of poles: 12, 90°, Solder pin length (l): 4.5 mm, tinned, Black, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190197384	Box	50 pc(s).

SL 5.08/180


Male connectors with straight outlet direction. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 18 A (IEC) / 15 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1518260000	SL 5.08/12/180 3.2 SN OR BX	PCB plug-in connector, male header, open side, Solder connection, 5.08 mm, No. of poles: 12, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 18 A UL: 300 V / 15 A	4008190070991	Box	50 pc(s).

BL/SL 5.08 series
BLZ 5.08/12/180 SN OR BX
onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-2083
 www.weidmueller.com

Mating connector (fully pluggable)
SLD 5.08/180G


2-tier male header with parallel pin arrangement. The solder pin length is optimised for wave flow soldering. The pin headers provide space for labelling and can be coded.

- 400 V (IEC) / 300 V (UL)
- 11 A (IEC) / 10 A (UL)

General ordering data

Order No.	Type	Version	Product data	GTIN (EAN)	Packaging	Qty.
1602490000	SLD 5.08/24/180G 3.2SN OR BX	PCB plug-in connector, male header, closed side, Solder connection, 5.08 mm, No. of poles: 24, 180°, Solder pin length (l): 3.2 mm, tinned, Orange, Box	IEC: 400 V / 11 A UL: 300 V / 10 A	4008190183233	Box	10 pc(s).