
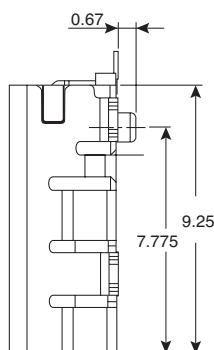


Mini USB AB Type Receptacle



154-15720-E

KOBICONN

Mini USB AB Type Receptacle

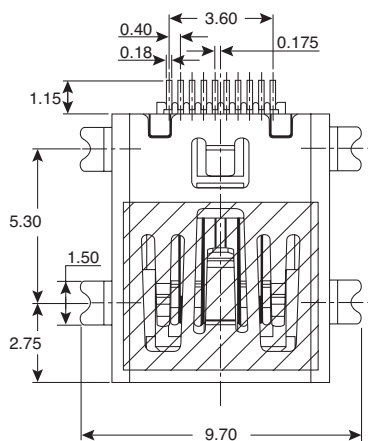

RECOMMENDED P.C. B LAYOUT (COMPONENT SIDE)
P.C.B THICKNESS=0.80mm

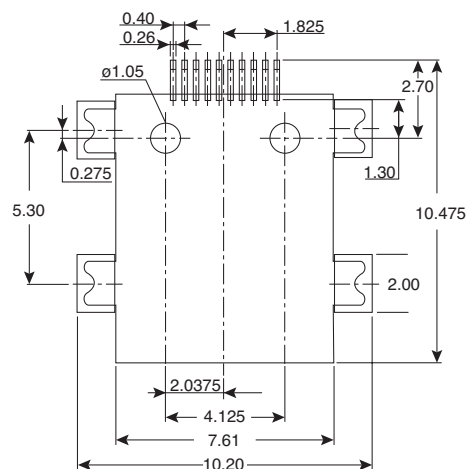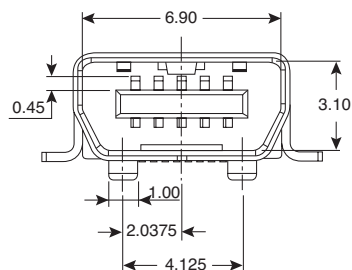

Dimensions: mm

MATERIAL SPECIFICATIONS

Housing	High Temp. Plastic
Terminal	Copper Alloy
Terminal Plating	Gold on Contact and Tin over nickel
Shell	Stainless Steel
Shell Plating	Gold on solder over nickel

ELECTRICAL SPECIFICATIONS

Current Rating	0.5A AC/DC
Voltage Raing	5V AC/DC
Contact Resistance	50mΩ MAX.
Insulation Resistance	500MΩ MIN.
Dielectric Withstanding Voltage	300V AC/MINUTE

RoHS Compliant

Date Last Revised: 6/29/12

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-301262

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

154-15720-E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[154-15720-E](#)