

Manual Switches

MML24 Series

Electronic Control Rocker Switches

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY



PWB Mount



Panel Mount



PWB Mount
(Lighted rocker)

FEATURES

- Accepts one or two LEDs or incandescent lamps which are ordered separately
- Printed wiring board mounting or snap-in panel mounting
- Bezels and mounting clips can be furnished installed or ordered separately
- UL recognized, CSA certified


MML24 ORDER GUIDE (Catalog listing for switch, less assembled display options)

MML24K	A	3	AA
Housing Type	Mounting	Terminals	Circuitry
MML24K Black housing	A No bezel (PWB mounting) K Black bezel, mtg. clip/long sides	3 Printed wiring board 2 Solder	Insert code letters from Circuitry Chart

Electrical Data	page 69
Bezels	page 84
Strip and matrix mounting	page 83
Mounting dimensions	pages 97/98
PWB pin locations	page 97


Rockers are permanently installed.

CIRCUITRY

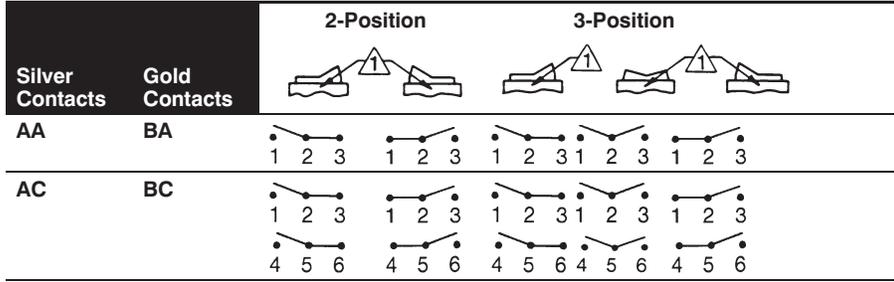

Example: MML24KA3AA01HDRXX
 Electronic control rocker switch with black housing, printed wiring board terminals; 1 pole, silver contacts; 2-position, maintained action; one circuit ON in each position; black rocker, red lens for LED display in Side 1 and no lens in Side 2.

The "MICRO SWITCH" identification is shown on this side of the switch housings.

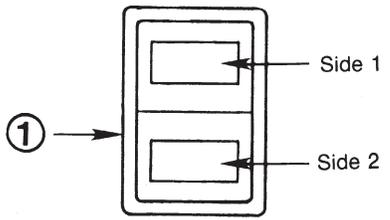

OPERATING ACTION

2-Position	01	Maint.	None	Maint.
	02	Mom.	None	Maint.
	03	Maint.	None	Mom.
3-Position	04	Maint.	Maint.	Maint.
	05	Mom.	Maint.	Mom.
	07	Mom.	Maint.	Maint.

Order display options assembled to switch by adding codes below.

01	H
Action	Rocker
Insert code numbers from Operating Action Chart	K Black rocker, non-lighted H Black rocker, one lens* F White rocker, one lens* * Lighted switches with solder terminals require MML93R receptacle to install lamps or LEDs. See page 88.

DRXX			
Side 1		Side 2	
XX	None	XX	None
LED display:	Incand. display:	LED display:	Incand. display:
DR Red	LR Red	DR Red	LR Red
DY Yellow	LY Yellow	DY Yellow	LY Yellow
DG Green	LG Green	DG Green	LG Green
	LW White		LW White

Leave blank, if legend not desired

Legend

20 With legend

Use legend order sheet FO-74193 to cover each catalog listing (see page 82).

CUSTOMER INSTALLATION:

LED

- Order LED and receptacle, page 85.
- Installation instructions, pages 86/88.

Incandescent Lamp

- Order lamp/PWB receptacle or lamp/solder receptacle, page 87.
- Installation instructions, page 88.

Manuals

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[MML24KA3AA07K](#) [MML24KA3AC01HDGXX](#) [MML24KA3AC04K](#) [MML24KA3BA05K](#) [MML24KK2BA04K](#)