


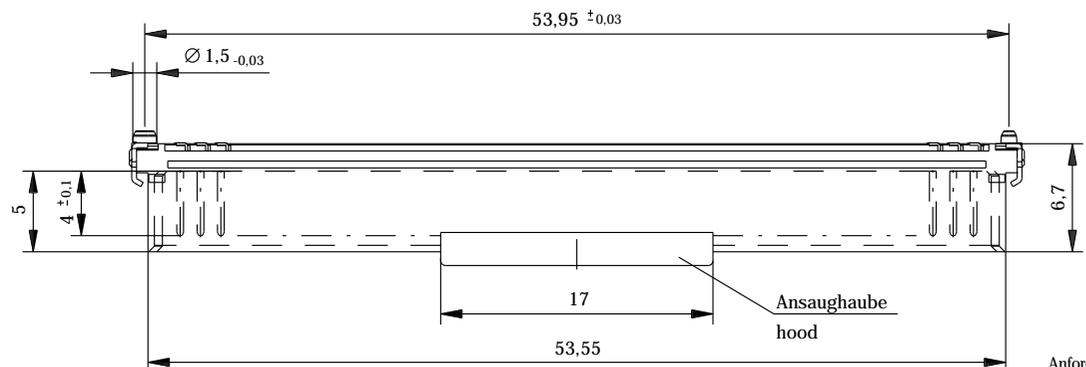



Verpackt in Gurtverpackung - Tape on Reel Packaging
 Verpackungseinheit: 280 Stück - Packaging unit: 280 pcs

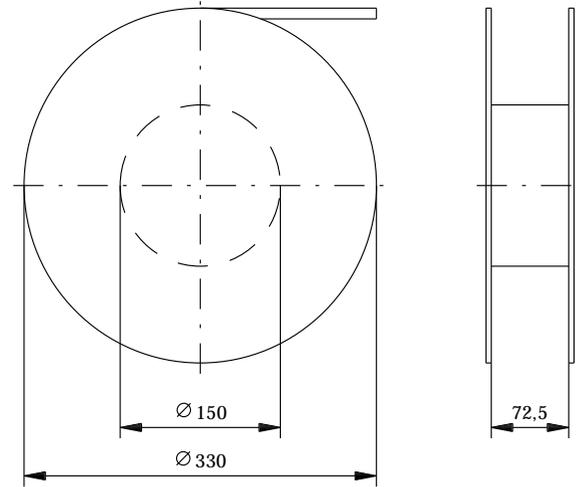

Abspulrichtung - Reel off Direction

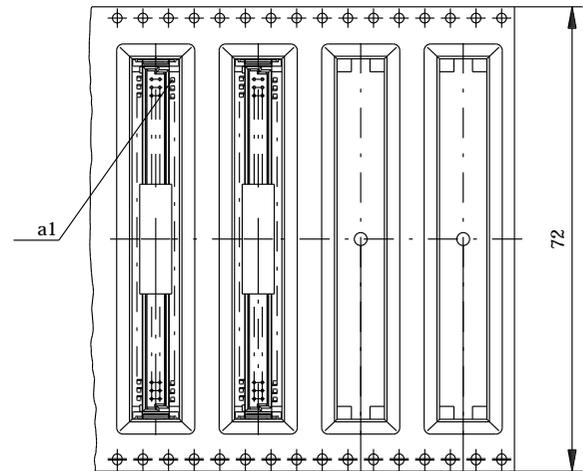

Leiterplatten-Layout Vorschlag für SMT
 PCB-Layout Proposal for SMT

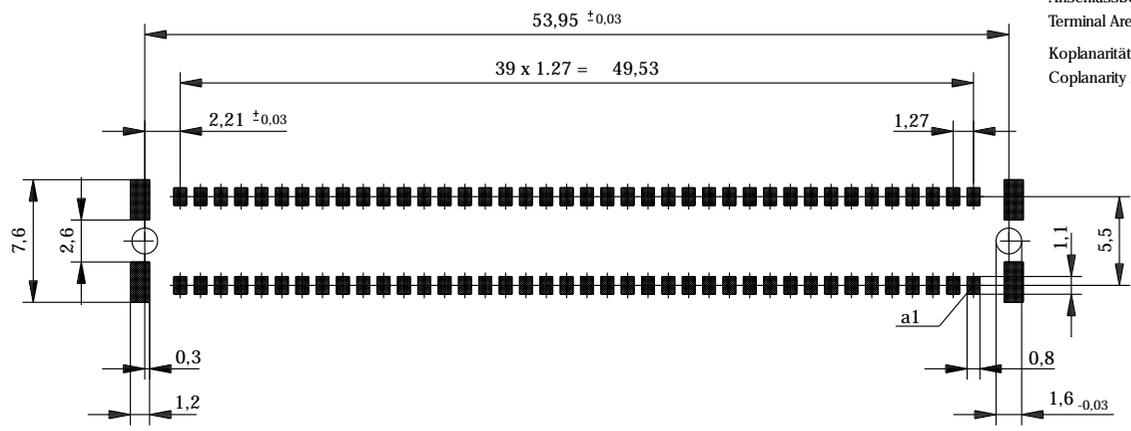

- Anforderungsstufe 1
Performance Level 1
- Kontaktbereich vergoldet
Mating Area gold plating
- Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating
- Koplanarität der Anschlüsse ≤ 0.1mm
Coplanarity Area of Termination ≤ 0.1 mm

BA7-13 - 8 mm Bauhöhe
 type7-13 - Low Profile

Information:		Tolerances	 All Dimensions in mm	Scale 3:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Angaben zu entsprechender Ident-Nr. siehe Fertigungsunterlagen For further information about LD. number see manufacturing document.
Designation Messerrl. SMC-Q 80-SMD-BA7-13 Male SMC-Q 80-SMD-type7-13		www.ERNI.com		
b	17.11.2005	V:00059761.SZA		154822
Index	Date			SMC

Consider protection memo from DIN 34