

SN54F243, SN74F243 QUADRUPLE BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SDFS086 – MARCH 1987 – REVISED OCTOBER 1993

- Asynchronous Communication Between Data Buses
- Local Bus-Latch Capability
- True Logic
- Package Options Include Plastic Small-Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs


description

These quadruple bus transceivers are designed for asynchronous communications between data buses. The control function implementation allows for maximum flexibility in timing. These devices allow data transmission from the A bus to the B bus or from the B bus to the A bus depending upon the logic levels at the output-enable (OEBA and OEAB) inputs. The output-enable inputs can be used to disable the device so that the buses are effectively isolated.


The dual-enable configuration gives the quadruple bus transceivers the capability to store data by simultaneous enabling of OEBA and OEAB. Each output reinforces its input in this transceiver configuration. Thus, when both control inputs are enabled and all other data sources to the two sets of bus lines are at high impedance, both sets of bus lines (eight in all) remain at their states. The 4-bit codes appearing on the two sets of buses will be identical for the 'F243.

The SN54F243 is characterized for operation over the full military temperature range of -55°C to 125°C . The SN74F243 is characterized for operation from 0°C to 70°C .

SN54F243 . . . J PACKAGE
SN74F243 . . . D OR N PACKAGE
(TOP VIEW)



SN54F243 . . . FK PACKAGE
(TOP VIEW)

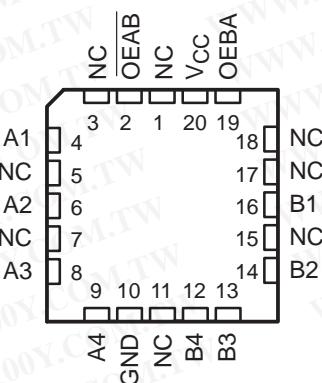

NC – No internal connection

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FUNCTION TABLE

INPUTS		FUNCTION
OEAB	OEBA	
L	L	A to B
H	H	B to A
H	L	Isolation
L	H	Latch A and B (A = B)

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**


POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1993, Texas Instruments Incorporated

**SN54F243, SN74F243
QUADRUPLE BUS TRANSCEIVERS
WITH 3-STATE OUTPUTS**


SDFS086 – MARCH 1987 – REVISED OCTOBER 1993

logic symbol†

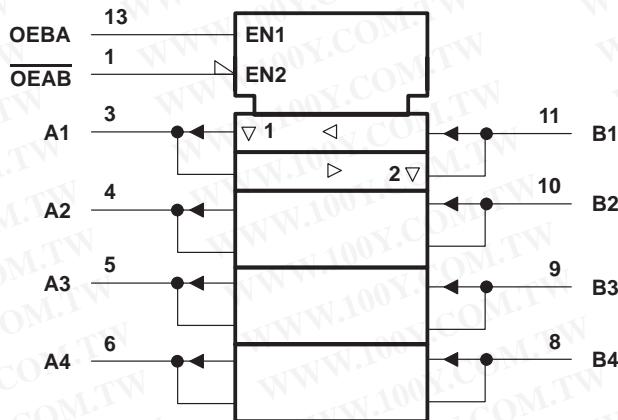

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

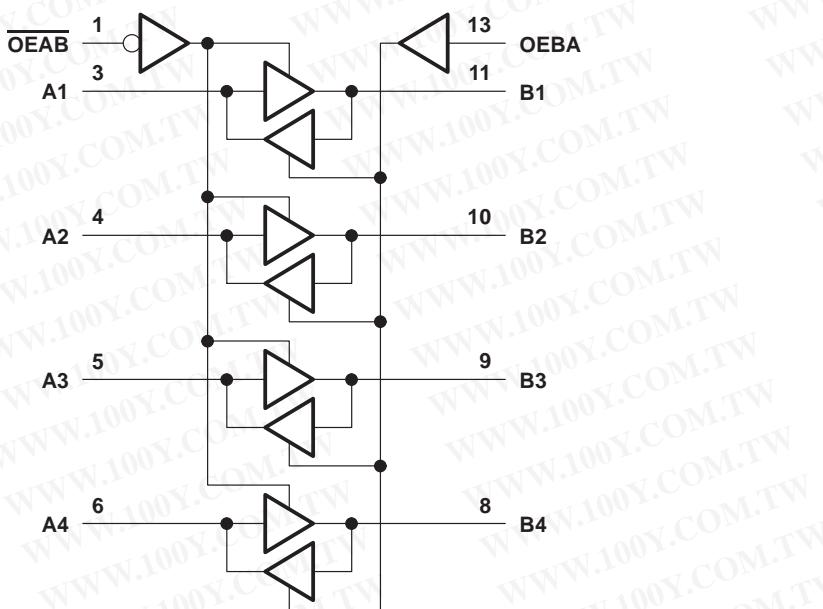

Pin numbers shown are for the D, J, and N packages.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input voltage ratings may be exceeded provided the input current ratings are observed.

recommended operating conditions

		SN54F243			SN74F243			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage		2		2			V
V _{IL}	Low-level input voltage			0.8			0.8	V
I _{IK}	Input clamp current			-18			-18	mA
I _{OH}	High-level output current			-12			-15	mA
I _{OL}	Low-level output current			48			64	mA
T _A	Operating free-air temperature	-55		125	0		70	°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw

**SN54F243, SN74F243
QUADRUPLE BUS TRANSCEIVERS
WITH 3-STATE OUTPUTS**

SDF086 – MARCH 1987 – REVISED OCTOBER 1993

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	SN54F243			SN74F243			UNIT
		MIN	TYP†	MAX	MIN	TYP†	MAX	
V_{IK}	$V_{CC} = 4.5 \text{ V}$, $I_I = -18 \text{ mA}$			-1.2			-1.2	V
V_{OH}	$V_{CC} = 4.5 \text{ V}$	$I_{OH} = -3 \text{ mA}$	2.4	3.3	2.4	3.3		V
		$I_{OH} = -12 \text{ mA}$	2	3.2				
		$I_{OH} = -15 \text{ mA}$			2	3.1		
V_{OL}	$V_{CC} = 4.5 \text{ V}$	$I_{OL} = 48 \text{ mA}$	0.38	0.55				V
		$I_{OL} = 64 \text{ mA}$			0.42	0.55		
I_I	A or B port Control inputs	$V_{CC} = 5.5 \text{ V}$	$V_I = 5.5 \text{ V}$		1		1	mA
			$V_I = 7 \text{ V}$		0.1		0.1	
I_{IH}	A or B port‡ Control inputs	$V_{CC} = 5.5 \text{ V}$, $V_I = 2.7 \text{ V}$		70		70		μA
				20		20		
I_{IL}^{\ddagger}	$V_{CC} = 5.5 \text{ V}$, $V_I = 0.5 \text{ V}$			-1		-1.6		mA
$I_{OS}^{\$}$	$V_{CC} = 5.5 \text{ V}$, $V_O = 0$		-100	-225	-100	-225		mA
I_{CC}	$V_{CC} = 5.5 \text{ V}$, See Note 2	Outputs high	64	80	64	80		mA
		Outputs low	64	90	64	90		
		Outputs disabled	71	90	71	90		

† All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

‡ For I/O ports, the parameters I_{IH} and I_{IL} include the off-state output current.

§ Not more than one output should be shorted at a time, and the duration of the short circuit should not exceed one second.

NOTE 2: I_{CC} is measured either with all transceivers enabled in only one direction or all transceivers disabled.

switching characteristics (see Note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_L = 500 \Omega$, $T_A = 25^\circ\text{C}$	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$, $C_L = 50 \text{ pF}$, $R_L = 500 \Omega$, $T_A = \text{MIN to MAX}^{\ddagger\ddagger}$			UNIT		
			'F243			SN54F243	SN74F243		
			MIN	TYP	MAX	MIN	MAX		
t_{PLH}	A or B	B or A	1.7	3.6	5.2	1.2	6.5	1.2	ns
t_{PHL}			1.7	3.6	5.2	1.2	8.5	1.2	
t_{PZH}	Enable	A or B	1.2	3.9	5.7	1.2	8	1.2	ns
t_{PZL}			1.2	5.4	7.5	1.2	10.5	1.2	
t_{PHZ}	Disable	A or B	1.2	4.1	6	1	7.5	1	ns
t_{PLZ}			2	4.5	6	2	8.5	2	

† For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.

NOTE 3: Load circuits and waveforms are shown in Section 1.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw