


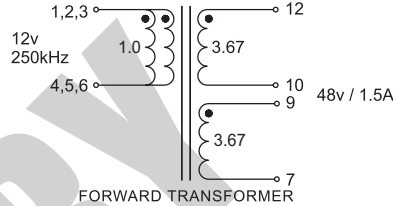
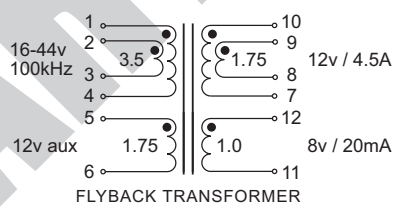
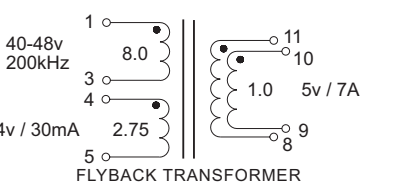
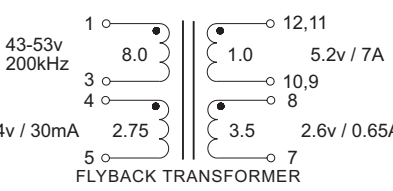
HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EFD25 Platforms - SMT



-  **Power Range:** Up to 105W
-  **Height:** 13.7mm Max
-  **Footprint:** 32.0mm x 26.4mm Max
-  **Topology:** Forward and Flyback

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

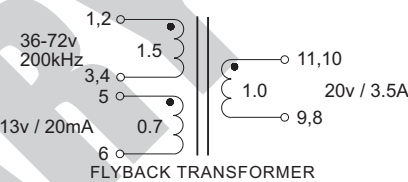
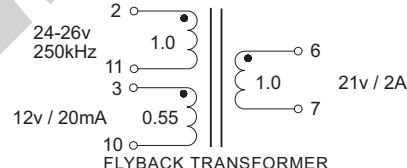
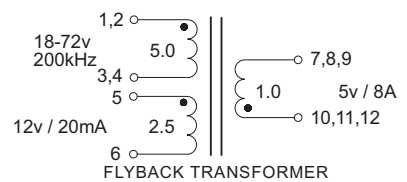
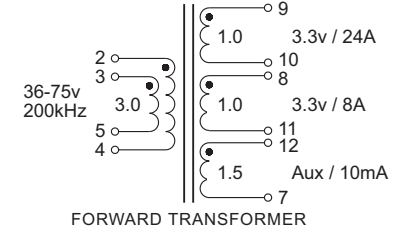
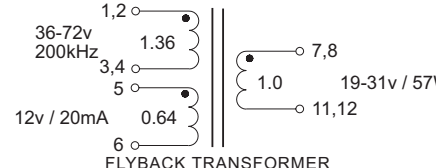
PA0700NL	Pri. Inductance	(1,2,3-4,5,6)	21.4μH ±40%	 FORWARD TRANSFORMER
	Lk. Inductance	(1,2,3-4,5,6) with (7,9,10,12) shorted	0.5μH MAX	
	DCR	(1,2,3-4,5,6)	4mΩ MAX	
		(12-10)	45mΩ MAX	
		(9-7)	40mΩ MAX	
	Hi-Pot	Pri-Sec	2250Vdc	
PA1188	K1 Factor	57.5		 FLYBACK TRANSFORMER
	Pri. Inductance	(1,2-3,4)	26.5μH ±15%	
	Lk. Inductance	(1,2-3,4) with (7,8,9,10) shorted	0.36μH MAX	
	DCR	(1-4)=(2-3)	50mΩ MAX	
		(5-6)	30mΩ MAX	
		(10-7)=(9-8)	20mΩ MAX	
		(12-11)	16mΩ MAX	
PA1434NL	Hi-Pot	Pri-Sec	1500Vdc	 FORWARD TRANSFORMER
	K1 Factor	326.4		
	Pri. Inductance	(2,3-4,5)	30.9μH ±10%	
	Lk. Inductance	(2,3-4,5) with (11,10,9,8) shorted	0.5μH MAX	
	DCR	(2,3-4,5)	36mΩ MAX	
PA1468NL		(11,10,9,8)	19mΩ MAX	 FLYBACK TRANSFORMER
	Hi-Pot	Pri-Sec	1800Vrms	
	K1 Factor	1075.7		
	Pri. Inductance	(1-3)	199.7μH ±12%	
	Lk. Inductance	(1-3) with (11,10,9,8) shorted	3.4μH MAX	
PA1543NL	DCR	(1-3)	142mΩ MAX	 FLYBACK TRANSFORMER
		(11-8)	73mΩ MAX	
		(11,10,9,8)	7.5mΩ MAX	
		(8-7)	265mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
	K1 Factor	1616.4		
PA1785NL	Pri. Inductance	(2,3-4,5)	98μH ±30%	 FORWARD TRANSFORMER
	Lk. Inductance	(2,3-4,5) with (7,8,9,10,11,12) shorted	1μH MAX	
	DCR	(2-4)	15.5mΩ MAX	
		(3-5)	22mΩ MAX	
		(12,11,10-9,8,7)	2.5mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	24.6		

HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EFD25 Platforms - SMT



Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA1799NL	Pri. Inductance	(1,2-11,12)	3.61μH ±12%	
	Lk. Inductance	(1,2-11,12) with (4,5,6,7,8,9) shorted	0.1μH MAX	
	DCR	(2-11)	5mΩ MAX	
		(1-12)	6mΩ MAX	
		(4,5,6-7,8,9)	9.3mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
K1 Factor	207.5			
PA1849NL	Pri. Inductance	(1,2-3,4)	30.8μH ±7%	
	Lk. Inductance	(1,2-3,4) with (8,9,10,11) shorted	0.75μH MAX	
	DCR	(1,2-3,4)	36mΩ MAX	
		(10,11-8,9)	20mΩ MAX	
		(5-6)	130mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
K1 Factor	354.0			
PA1927NL	Pri. Inductance	(2-11)	23.7μH ±10%	
	Lk. Inductance	(2-11) with (6,7) shorted	0.5μH MAX	
	DCR	(2-11)	14mΩ MAX	
		(6-7)	14mΩ MAX	
		(3-1)	110mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vdc	
K1 Factor	454.0			
PA2226NL	Pri. Inductance	(1,2-3,4)	25μH ±10%	
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	0.5μH MAX	
	DCR	(1,2-3,4)	16mΩ MAX	
		(5-6)	60mΩ MAX	
		(10,11,12-7,8,9)	2.5mΩ MAX	
	Hi-Pot	Pri-Sec	2250Vdc	
K1 Factor	431.0			
PA2247NL	Pri. Inductance	(2,3-4,5)	40.5μH ±30%	
	Lk. Inductance	(2,3-4,5) with (7,8,9,10,11,12) shorted	3.5μH MAX	
	DCR	(2-4)	22mΩ MAX	
		(3-5)	22mΩ MAX	
		(9-10)	4mΩ MAX	
		(8-11)	4mΩ MAX	
		(12-7)	170mΩ MAX	
	Hi-Pot	Pri-Sec	2000Vrms	
K1 Factor	28.7			
PA2459NL	Pri. Inductance	(1,2-3,4)	57.8μH ±10%	
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,11,12) shorted	0.46μH MAX	
	DCR	(1,2-3,4)	53mΩ MAX	
		(5-6)	94mΩ MAX	
		(7,8-11,12)	33mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	524.5			

HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EFD25 Platforms - SMT



Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA2464NL	Pri. Inductance	(1,2-3,4)	40.5μH ±10%	
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	n/a μH MAX	
	DCR	(1,2-3,4)	48mΩ MAX	
		(5-6)	167mΩ MAX	
		(8-7)	17mΩ MAX	
		(12-11)	18mΩ MAX	
		(10-9)	102mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	436.4		
PA2532NL	Pri. Inductance	(1,2-3,4)	12.2μH ±10%	
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	0.196 μH MAX	
	DCR	(1,2-3,4)	18mΩ MAX	
		(5-6)	72mΩ MAX	
		(8-7)	9.3mΩ MAX	
		(12-11)	9.3mΩ MAX	
		(10-9)	35mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	131.5		
PA2548NL	Pri. Inductance	(1,2-3,4)	11.2μH ±10%	
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	n/a μH MAX	
	DCR	(1,2-3,4)	18mΩ MAX	
		(5-6)	73mΩ MAX	
		(8-7)	20mΩ MAX	
		(12-11)	21mΩ MAX	
	Hi-Pot	Pri-Sec	2250Vrms	
	K1 Factor	241.4		

HIGH FREQUENCY WIRE WOUND TRANSFORMERS

EFD25 Platforms - SMT



Notes

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:

$$B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$$

4. In high volt-μsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:

$$CoreLoss \text{ (W)} = 2.98E-13 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$$

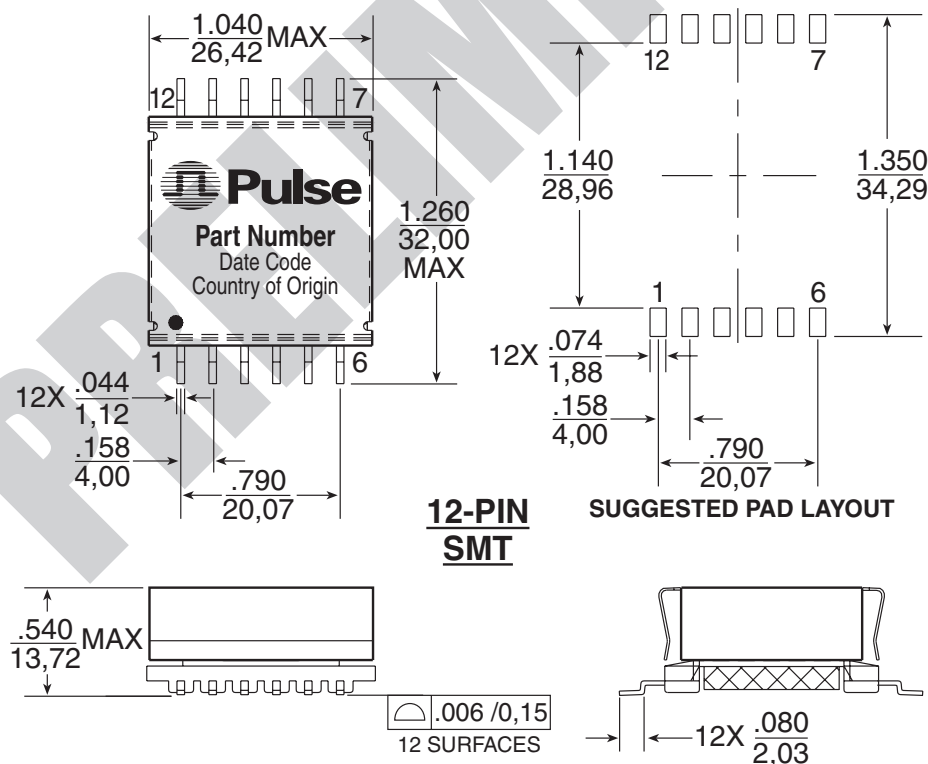
where ΔB can be calculated as:

$$\text{For Flyback Topology: } \Delta B = K1_Factor * \Delta(A)$$

$$\text{For Forward Topology: } \Delta B = K1_Factor * Volt\text{-}\mu sec$$

5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0700NL becomes PA0700NLT). Pulse complies with industry standard tape and reel specification EIA481.
6. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical



For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.
www.pulseeng.com

TEL: 858 674 8100
FAX: 858 674 8262

Pulse European Headquarters

Einsteinstrasse 1
D-71083 Herrenberg
Germany

TEL: 49 7032 7806 0
FAX: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejian Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

TEL: 886 3 4643715
FAX: 886 3 4641911

This is a "Preliminary" product data sheet. Products mentioned on this data sheet are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners. For current information on this product, please contact the Pulse office nearest you and ask for the "Power Applications Engineer." © Copyright, 2008. Pulse Engineering, Inc. All rights reserved.