
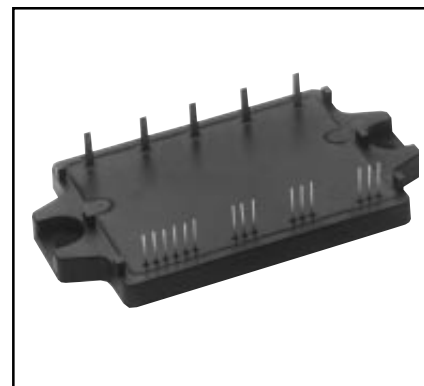


Intellimod™ Modules

Three Phase Converter
IGBT Inverter Output
15 Amperes/1200 Volt

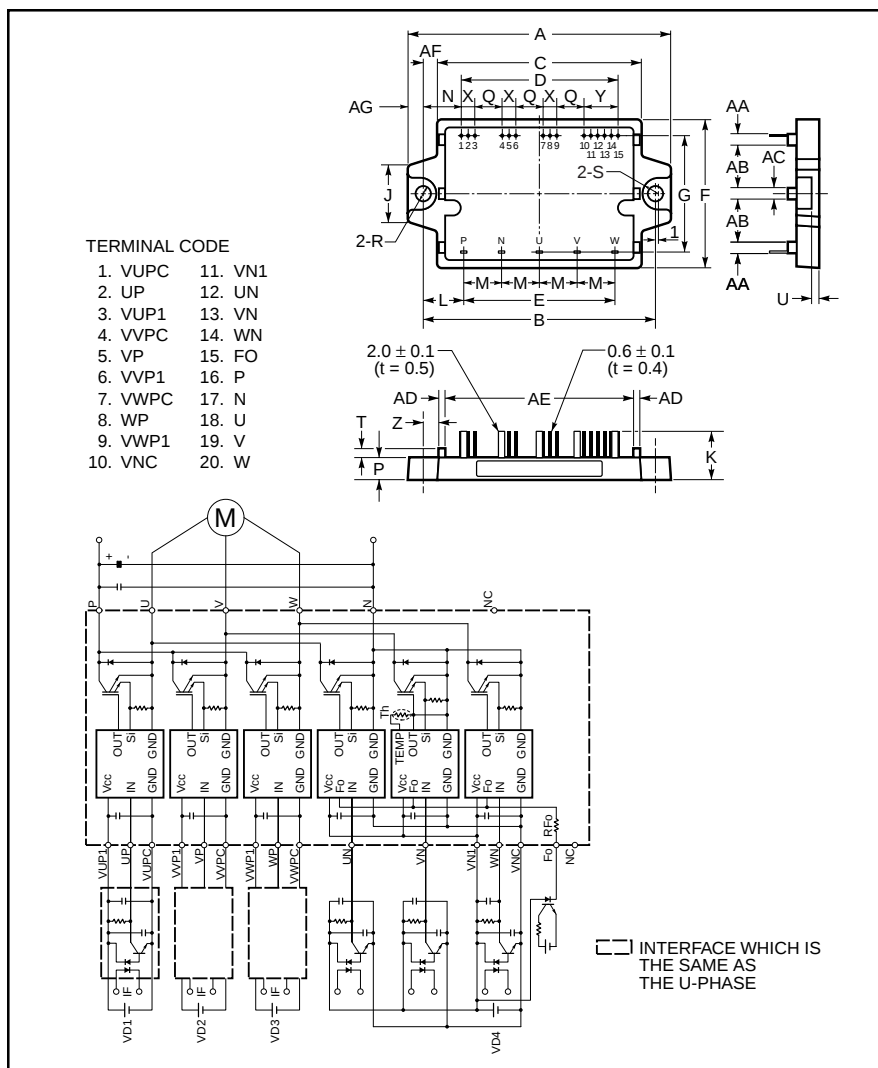

Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free wheel-diode power devices.

Features:

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
 - Short Circuit
 - Over Current
 - Over Temperature
 - Under Voltage

Applications:

- ☐ Inverters
- ☐ UPS
- ☐ Motion/Servo Control
- ☐ Power Supplies

Ordering Information:

Example: Select the Complete part number from the table below -i.e. PM15CZF120 is a 1200V, 15 Ampere Intellimod™ Intelligent Power Module.

Type	Current Rating Amperes	V _{CE} Volts (x 10)
PM	15	120

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	3.86±0.04	98.0±1.0
B	3.43±0.02	87.0±0.5
C	2.99	76.0
D	2.30	58.42
E	2.20±0.03	56.0±0.8
F	2.21±0.04	56.0±1.0
G	1.73±0.03	44.0±0.8
J	0.83	21.0
K	0.71±0.04	18.0±1.0
L	0.61	15.5
M	0.55±0.01	14.0±0.3
N	0.56	14.29
P	0.32±0.02	8.0±0.5
Q	0.40	10.16

Dimensions	Inches	Millimeters
R	0.22 Dia.	5.5 Dia.
S	0.24 Rad.	6.0 Rad.
T	0.14	3.5
U	0.12±0.02	3.0±0.5
X	0.1±0.01	2.54±0.3
Y	0.1±0.01	2.54±0.3
Z	0.24	6.0
AA	0.12	3.0
AB	0.69	17.5
AC	0.16	4.0
AD	0.10	2.5
AE	2.76	70.0
AF	0.22	5.5
AG	0.22	5.5

PM15CZF120

Intellimod™ Modules

Three Phase Converter IGBT Inverter Output

15 Amperes/1200 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM15CZF120	Units
Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	T_C	-20 to 100	$^\circ\text{C}$
Mounting Torque M5 Mounting Screws	—	17	in-lb
Module Weight (Typical)	—	80	Grams
Supply Voltage Protected by OC and SC ($V_D = 13.5 \sim 16.5\text{V}$, Inverter Part)	$V_{CC(prot)}$	800	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{RMS}	2500	Volts

Control Sector

Supply Voltage Applied between ($V_{UP1}-V_{UPC}$, $V_{VP1}-V_{VPC}$, $V_{WP1}-V_{WPC}$, $V_{N1}-V_{NC}$)	V_D	20	Volts
Input Voltage Applied between (U_P , V_P , W_P , U_N , V_N , W_N)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between F_O and V_{NC})	V_{FO}	20	Volts
Fault Output Current	I_{FO}	20	mA

IGBT Inverter Sector

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{CIN} = 15\text{V}$)	V_{CES}	1200	Volts
Collector Current, $\pm$	I_C	15	Amperes
Peak Collector Current, $\pm$	I_{CP}	30	Amperes
Supply Voltage (Applied between P-N)	V_{CC}	900	Volts
Supply Voltage, Surge (Applied between P-N, Surge Value)	$V_{CC(surge)}$	1000	Volts
Collector Dissipation	P_C	83	Watts

PM15CZF120
Intellimod™ Modules
Three Phase Converter IGBT Inverter Output
15 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Sector						
Over Current Trip Level	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$	22	37	–	Amperes
Short Circuit Trip Level	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$, $V_D = 15\text{V}$	–	56	–	Amperes
Over Current Delay Time	$t_{\text{off}}(\text{OC})$	$V_D = 15\text{V}$	–	10	–	μS
Over Temperature Protection	OT	Trip Level	100	110	120	$^\circ\text{C}$
	OT_R	Reset Level	–	90	–	$^\circ\text{C}$
Supply Circuit Under Voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
	UV_R	Reset Level	–	12.5	–	Volts
Supply Voltage	V_D	Applied between $V_{\text{UP}1}-V_{\text{UPC}}$, $V_{\text{VP}1}-V_{\text{VPC}}$, $V_{\text{WP}1}-V_{\text{WPC}}$, $V_{\text{N}1}-V_{\text{NC}}$	13.5	15.0	16.5	Volts
Circuit Current	I_D	$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{N}1}-V_{\text{NC}}$	–	18	25	mA
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$, $V_{\text{XP}1}-V_{\text{XPC}}$	–	7	10	mA
Input ON Threshold Voltage	$V_{\text{CIN}(\text{on})}$	Applied between	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN}(\text{off})}$	$U_P, V_P, W_P, U_N, V_N, W_N$	1.7	2.0	2.3	Volts
PWM Input Frequency	f_{PWM}	3- $\emptyset$ Sinusoidal	–	15	20	kHz
Fault Output Current	$I_{\text{FO}(\text{H})}$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	–	–	0.01	mA
	$I_{\text{FO}(\text{L})}$	$V_D = 15\text{V}$, $V_{\text{FO}} = 15\text{V}$	–	10	15	mA
Minimum Fault Output Pulse Width	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	–	mS

PM15CZF120

Intellimod™ Modules

Three Phase Converter IGBT Inverter Output

15 Amperes/1200 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Cutoff Current	I_{CES}	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$	–	–	1	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$	–	–	10	mA
FwDi Forward Voltage	V_{EC}	$-I_C = 15A, V_D = 15V, V_{CIN} = 15V$	–	2.5	3.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 15A, T_j = 25^\circ\text{C}$	–	2.7	3.7	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 15A, T_j = 125^\circ\text{C}$	–	2.5	3.4	Volts
Inductive Load Switching Times	t_{on}		0.3	0.6	1.3	μS
	t_{rr}	$V_D = 15V, V_{CIN} = 0 \sim 15V,$	–	0.15	–	μS
	$t_{C(on)}$	$V_{CC} = 600V, I_C = 15A,$	–	0.3	1.0	μS
	t_{off}	$T_j = 125^\circ\text{C}, \text{ Inductive Load}$	–	1.8	3.3	μS
	$t_{C(off)}$		–	0.8	1.5	μS


Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	–	–	1.5	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Each FwDi	–	–	4.5	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	–	–	0.067	$^\circ\text{C/Watt}$

Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	0 ~ 800	Volts
	V_D	Applied between V_{UP1} - V_{UPC} , V_{N1} - V_{NC} , V_{VP1} - V_{VPC} , V_{WP1} - V_{WPC}	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N$	$4.0 \sim V_D$	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	5 ~ 20	kHz
Minimum Dead Time	t_{DEAD}	Input Signal	≥ 3.0	μS

PM15CZF120
Intellimod™ Modules
Three Phase Converter IGBT Inverter Output
15 Amperes/1200 Volts

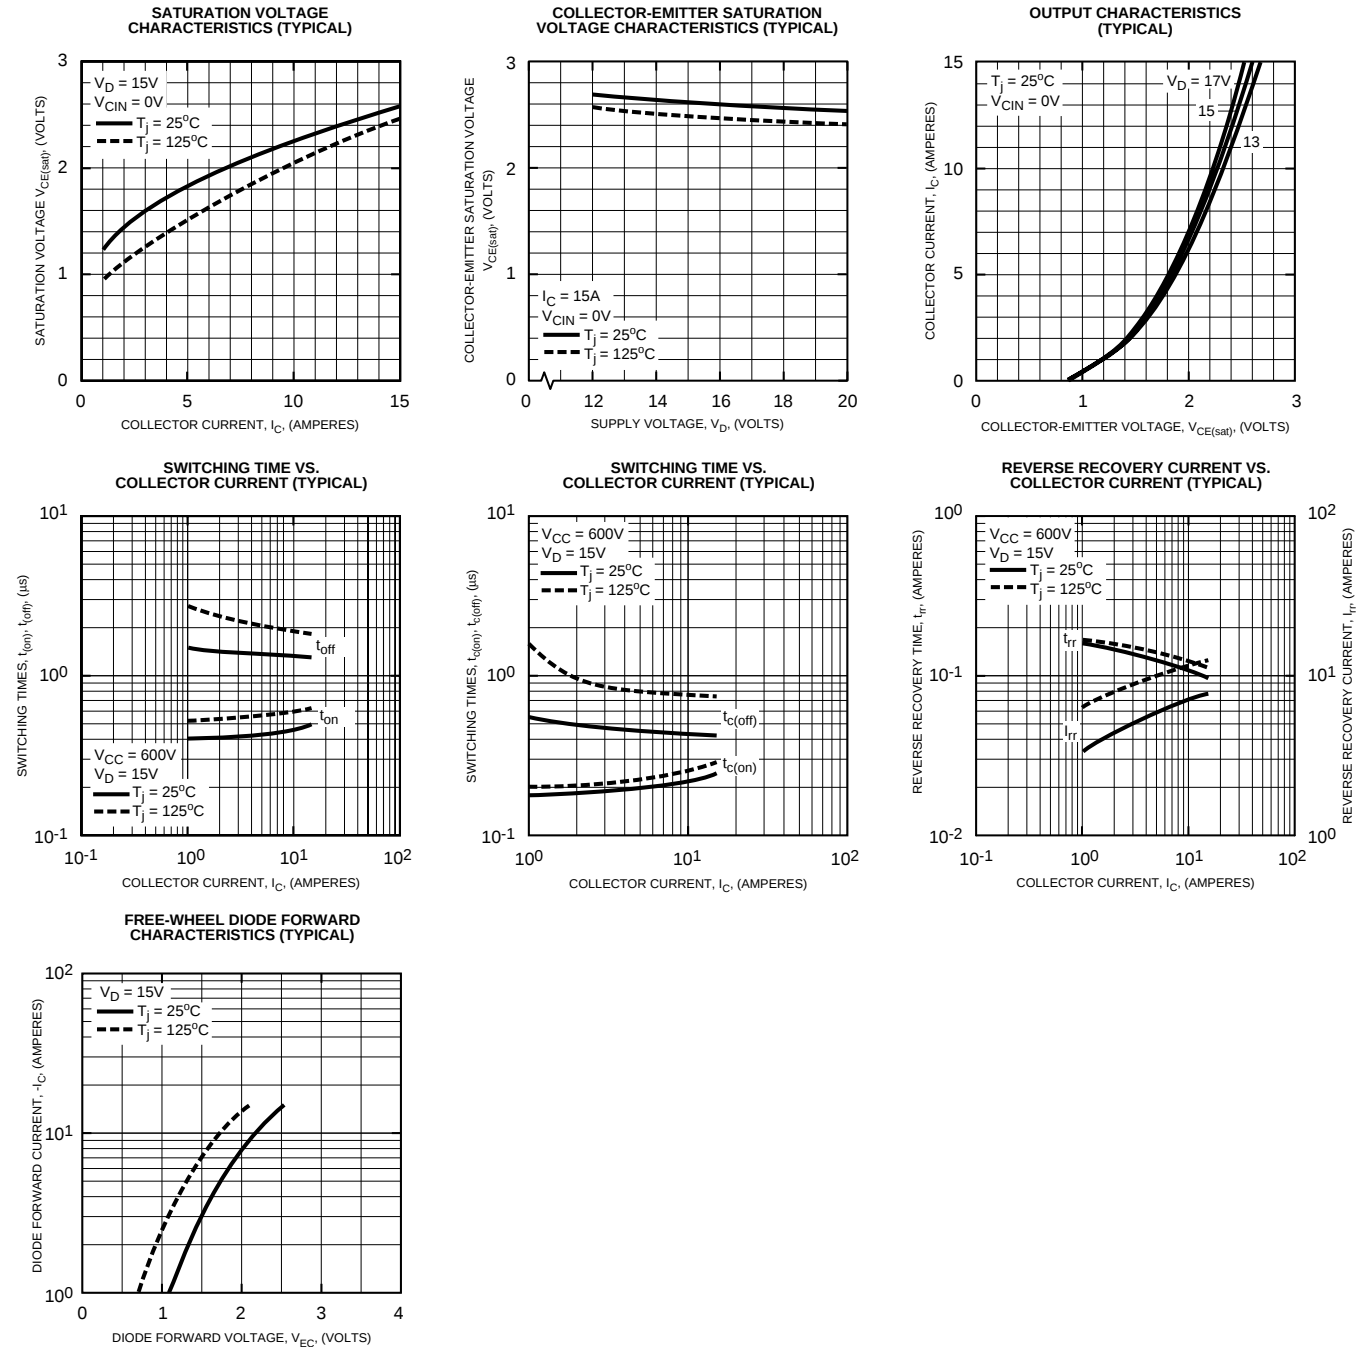

PM15CZF120

Intellimod™ Modules

Three Phase Converter IGBT Inverter Output

15 Amperes/1200 Volts

