

---

### LOW NOISE 150mA LDO REGULATOR

---

NO.EA-149-070720

#### OUTLINE

The RP103x Series are CMOS-based voltage regulator ICs with high output voltage accuracy, extremely low supply current, low ON-resistance, and high ripple rejection. Each of these ICs consists of a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit.

These ICs perform with low dropout voltage and a chip enable function. The line transient response and load transient response of the RP103x Series are excellent, thus these ICs are very suitable for the power supply for hand-held communication equipment.

The output voltage of these ICs is fixed with high accuracy. Since the packages for these ICs are PLP1010-4, SOT23-5, SC82-AB, therefore high density mounting of the ICs on boards is possible.


#### FEATURES

- Supply Current .....Typ. 36 $\mu$ A
- Standby Mode .....Typ. 0.1 $\mu$ A
- Dropout Voltage.....Typ. 0.21V ( $I_{OUT}=150\text{mA}$ ,  $V_{OUT}=2.8\text{V}$ )
- Ripple Rejection .....Typ. 75dB ( $f=1\text{kHz}$ )
- Temperature-Drift Coefficient of Output Voltage .....Typ.  $\pm 30\text{ppm}/^{\circ}\text{C}$
- Line Regulation .....Typ. 0.02%/V
- Output Voltage Accuracy ..... $\pm 1.0\%$
- Packages.....PLP1010-4, SOT-23-5, SC-82AB
- Input Voltage Range.....1.7V to 5.25V
- Output Voltage.....1.2V, 1.3V, 1.5V, 1.8V, 1.85V, 1.9V, 2.0V, 2.3V, 2.5V  
2.6V, 2.7V, 2.8V, 2.85V, 2.9V, 3.0V, 3.1V, 3.3V
- Built-in Fold Back Protection Circuit.....Typ. 40mA (Current at short mode)
- Ceramic capacitors are recommended to be used with this IC .... 0.47 $\mu$ F or more

#### APPLICATIONS

- Power source for portable communication equipment.
- Power source for electrical appliances such as cameras, VCRs and camcorders.
- Power source for battery-powered equipment.
- Power source for home appliances.

# BLOCK DIAGRAMS

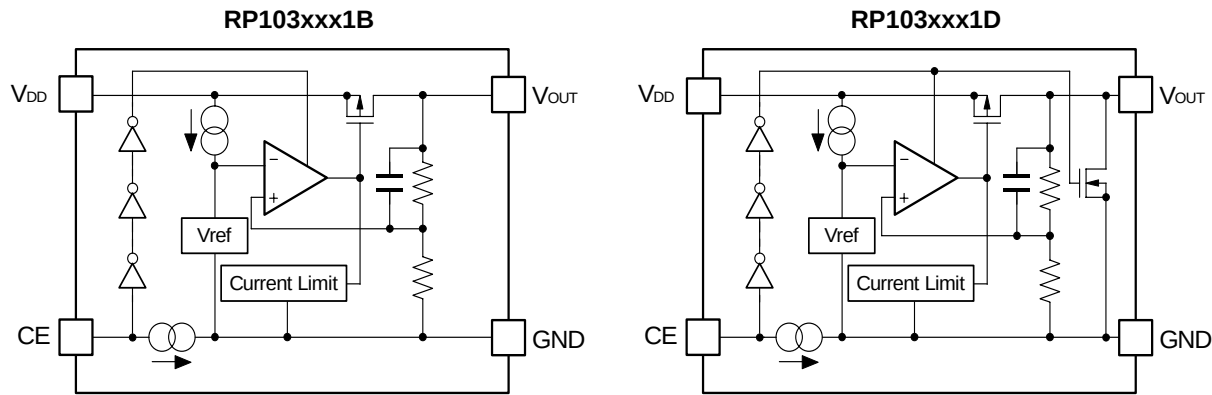

# SELECTION GUIDE

The output voltage, auto discharge function\*, and the taping type for the ICs can be selected at the user's request.

The selection can be made with designating the part number as shown below;


RP103xxx1x-xx-X ←Part Number  
↑ ↑ ↑ ↑ ↑  
a b c d e

| Code | Contents                                                                                                                                                                                                                                                              |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| a    | Designation of Package Type:<br>K: PLP1010-4<br>N: SOT-23-5<br>Q: SC-82AB                                                                                                                                                                                             |
| b    | Setting Output Voltage (V <sub>OUT</sub> ):<br>The following 16 kinds of voltage are standard.<br>1.2V, 1.3V, 1.5V, 1.8V, 1.85V, 1.9V, 2.0V, 2.3V, 2.5V, 2.6V, 2.7V, 2.8V, 2.85V, 2.9V, 3.0V, 3.1V, 3.3V<br>Exceptions:1.85V=RP103x181x5-xx-x, 2.85V=RP103x281x5-xx-x |
| c    | Designation of Mask Option<br>B: active high, without auto discharge function* at OFF state.<br>D: active high, with auto discharge function* at OFF state.                                                                                                           |
| d    | Designation of Taping Type:<br>Ex. TR (refer to Taping Specifications; TR type is the standard direction.)                                                                                                                                                            |
| e    | Designation of composition of pin plating:<br>-F: Lead free plating (SOT-23-5, SC-82AB)<br>None: Au plating (PLP1010-4)                                                                                                                                               |


\*) When the mode is into standby with CE signal, auto discharge transistor turns on, and it makes the turn-off speed faster than normal type.

## PIN CONFIGURATIONS


### • PLP1010-4

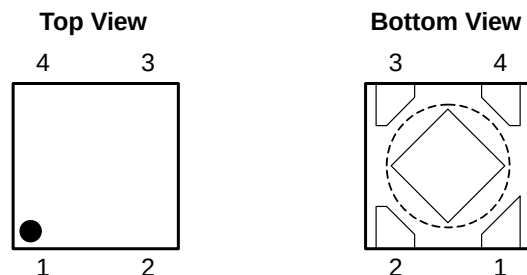

### • SOT-23-5



### • SC-82AB



## PIN DESCRIPTIONS

### • PLP1010-4

| Pin No. | Symbol    | Description                  |
|---------|-----------|------------------------------|
| 1       | $V_{OUT}$ | Output Pin                   |
| 2       | GND       | Ground Pin                   |
| 3       | CE        | Chip Enable Pin ("H" Active) |
| 4       | $V_{DD}$  | Input Pin                    |

\*) Tab in the  parts have GND level.  
(They are connected to the back side of this IC.)  
Do not connect to other wires or land patterns.

### • SOT-23-5

| Pin No. | Symbol    | Description                  |
|---------|-----------|------------------------------|
| 1       | $V_{DD}$  | Input Pin                    |
| 2       | GND       | Ground Pin                   |
| 3       | CE        | Chip Enable Pin ("H" Active) |
| 4       | NC        | No Connection                |
| 5       | $V_{OUT}$ | Output Pin                   |

### • SC-82AB

| Pin No. | Symbol    | Description                  |
|---------|-----------|------------------------------|
| 1       | CE        | Chip Enable Pin ("H" Active) |
| 2       | GND       | Ground Pin                   |
| 3       | $V_{OUT}$ | Output Pin                   |
| 4       | $V_{DD}$  | Input Pin                    |

**ABSOLUTE MAXIMUM RATINGS**

| Symbol    | Item                           | Rating               | Unit |
|-----------|--------------------------------|----------------------|------|
| $V_{IN}$  | Input Voltage                  | 6.0                  | V    |
| $V_{CE}$  | Input Voltage (CE Pin)         | 6.0                  | V    |
| $V_{OUT}$ | Output Voltage                 | -0.3 to $V_{IN}+0.3$ | V    |
| $I_{OUT}$ | Output Current                 | 180                  | mA   |
| $P_D$     | Power Dissipation* (PLP1010-4) | 400                  | mW   |
|           | Power Dissipation* (SOT-23-5)  | 420                  |      |
|           | Power Dissipation* (SC-82AB)   | 380                  |      |
| $T_{opt}$ | Operating Temperature Range    | -40 to 85            | °C   |
| $T_{stg}$ | Storage Temperature Range      | -55 to 125           | °C   |

\*) For Power Dissipation, please refer to PACKAGE INFORMATION to be described.

## ELECTRICAL CHARACTERISTICS

### • RP103xxx1B/D

$V_{IN}$ =Set  $V_{OUT}+1V$  for  $V_{OUT}$  options greater than 1.5V.  $V_{IN}=2.5V$  for  $V_{OUT} \leq 1.5V$ .

$I_{OUT}=1mA$ ,  $C_{IN}=C_{OUT}=0.47\mu F$ , unless otherwise noted.


  values indicate  $-40^{\circ}C \leq T_a \leq 85^{\circ}C$ , unless otherwise noted.

$T_{opt}=25^{\circ}C$

| Symbol                          | Item                                            | Conditions                                                                                                                      |                               | Min.                                                                 | Typ.     | Max.                                                                 | Unit             |
|---------------------------------|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------|----------|----------------------------------------------------------------------|------------------|
| $V_{OUT}$                       | Output Voltage                                  | $T_{opt}=25^{\circ}C$                                                                                                           | $V_{OUT} > 2.0V$              | $\times 0.99$                                                        |          | $\times 1.01$                                                        | V                |
|                                 |                                                 |                                                                                                                                 | $V_{OUT} \leq 2.0V$           | -20                                                                  |          | +20                                                                  | mV               |
|                                 |                                                 | $-40^{\circ}C \leq T_{opt} \leq 85^{\circ}C$                                                                                    | $V_{OUT} > 2.0V$              | <span style="border: 1px solid black; padding: 0 2px;">×0.985</span> |          | <span style="border: 1px solid black; padding: 0 2px;">×1.015</span> | V                |
|                                 |                                                 |                                                                                                                                 | $V_{OUT} \leq 2.0V$           | <span style="border: 1px solid black; padding: 0 2px;">-30</span>    |          | <span style="border: 1px solid black; padding: 0 2px;">+30</span>    | mV               |
| $I_{OUT}$                       | Output Current                                  |                                                                                                                                 |                               | <span style="border: 1px solid black; padding: 0 2px;">150</span>    |          |                                                                      | mA               |
| $\Delta V_{OUT}/\Delta I_{OUT}$ | Load Regulation                                 | $1mA \leq I_{OUT} \leq 150mA$                                                                                                   |                               |                                                                      | 10       | <span style="border: 1px solid black; padding: 0 2px;">30</span>     | mV               |
| $V_{DIF}$                       | Dropout Voltage                                 | $I_{OUT}=150mA$                                                                                                                 | $1.2V \leq V_{OUT} < 1.5V$    |                                                                      | 0.50     | <span style="border: 1px solid black; padding: 0 2px;">0.62</span>   | V                |
|                                 |                                                 |                                                                                                                                 | $1.5V \leq V_{OUT} < 1.7V$    |                                                                      | 0.38     | <span style="border: 1px solid black; padding: 0 2px;">0.47</span>   |                  |
|                                 |                                                 |                                                                                                                                 | $1.7V \leq V_{OUT} < 2.0V$    |                                                                      | 0.34     | <span style="border: 1px solid black; padding: 0 2px;">0.42</span>   |                  |
|                                 |                                                 |                                                                                                                                 | $2.0V \leq V_{OUT} < 2.5V$    |                                                                      | 0.28     | <span style="border: 1px solid black; padding: 0 2px;">0.36</span>   |                  |
|                                 |                                                 |                                                                                                                                 | $2.5V \leq V_{OUT} < 2.8V$    |                                                                      | 0.22     | <span style="border: 1px solid black; padding: 0 2px;">0.30</span>   |                  |
|                                 |                                                 |                                                                                                                                 | $2.8V \leq V_{OUT} \leq 3.3V$ |                                                                      | 0.21     | <span style="border: 1px solid black; padding: 0 2px;">0.27</span>   |                  |
| $I_{SS}$                        | Supply Current                                  | $I_{OUT}=0mA$                                                                                                                   |                               |                                                                      | 36       | <span style="border: 1px solid black; padding: 0 2px;">50</span>     | $\mu A$          |
| $I_{standby}$                   | Supply Current (Standby)                        | $V_{CE}=0V$                                                                                                                     |                               |                                                                      | 0.1      | 1.0                                                                  | $\mu A$          |
| $\Delta V_{OUT}/\Delta V_{IN}$  | Line Regulation                                 | Set $V_{OUT}+0.5V \leq V_{IN} \leq 5.0V$                                                                                        |                               |                                                                      | 0.02     | <span style="border: 1px solid black; padding: 0 2px;">0.10</span>   | %/V              |
| RR                              | Ripple Rejection                                | $f=1kHz$ , Ripple 0.2Vp-p<br>$V_{IN}$ =Set $V_{OUT}+1V$ , $I_{OUT}=30mA$<br>(In case that $V_{OUT} \leq 2.0V$ , $V_{IN}=3.0V$ ) |                               |                                                                      | 75       |                                                                      | dB               |
| $V_{IN}$                        | Input Voltage*                                  |                                                                                                                                 |                               | <span style="border: 1px solid black; padding: 0 2px;">1.7</span>    |          | <span style="border: 1px solid black; padding: 0 2px;">5.25</span>   | V                |
| $\Delta V_{OUT}/\Delta T_{opt}$ | Output Voltage Temperature Coefficient          | $-40^{\circ}C \leq T_{opt} \leq 85^{\circ}C$                                                                                    |                               |                                                                      | $\pm 30$ |                                                                      | ppm/ $^{\circ}C$ |
| $I_{lim}$                       | Short Current Limit                             | $V_{OUT}=0V$                                                                                                                    |                               |                                                                      | 40       |                                                                      | mA               |
| $I_{PD}$                        | CE Pull-down Current                            |                                                                                                                                 |                               |                                                                      | 0.3      |                                                                      | $\mu A$          |
| $V_{CEH}$                       | CE Input Voltage "H"                            |                                                                                                                                 |                               | <span style="border: 1px solid black; padding: 0 2px;">1.5</span>    |          |                                                                      | V                |
| $V_{CEL}$                       | CE Input Voltage "L"                            |                                                                                                                                 |                               |                                                                      |          | <span style="border: 1px solid black; padding: 0 2px;">0.3</span>    | V                |
| en                              | Output Noise                                    | BW=10Hz to 100kHz<br>$I_{OUT}=30mA$                                                                                             |                               |                                                                      | 60       |                                                                      | $\mu V_{rms}$    |
| $R_{LOW}$                       | Low Output Nch Tr. ON Resistance (of D version) | $V_{IN}=4.0V$<br>$V_{CE}=0V$                                                                                                    |                               |                                                                      | 30       |                                                                      | $\Omega$         |

\*) When Input Voltage is 5.5V, the total operational time must be within 500hrs.

## TYPICAL APPLICATION

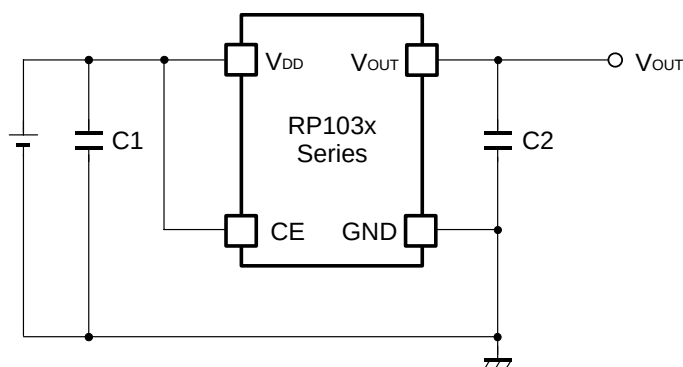

(External Components)

C2 0.47 $\mu$ F MURATA: GRM155B30J474KE18B

## TECHNICAL NOTES

When using these ICs, consider the following points:

### Phase Compensation


In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, use a capacitor C2 with good frequency characteristics and ESR (Equivalent Series Resistance). (Note: If additional ceramic capacitors are connected with parallel to the output pin with an output capacitor for phase compensation, the operation might be unstable. Because of this, test these ICs with as same external components as ones to be used on the PCB.)

### PCB Layout


Make  $V_{DD}$  and GND lines sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect a capacitor C1 with a capacitance value as much as 0.47 $\mu$ F or more between  $V_{DD}$  and GND pin, and as close as possible to the pins.

Set external components, especially the output capacitor C2, as close as possible to the ICs, and make wiring as short as possible.


## TEST CIRCUITS

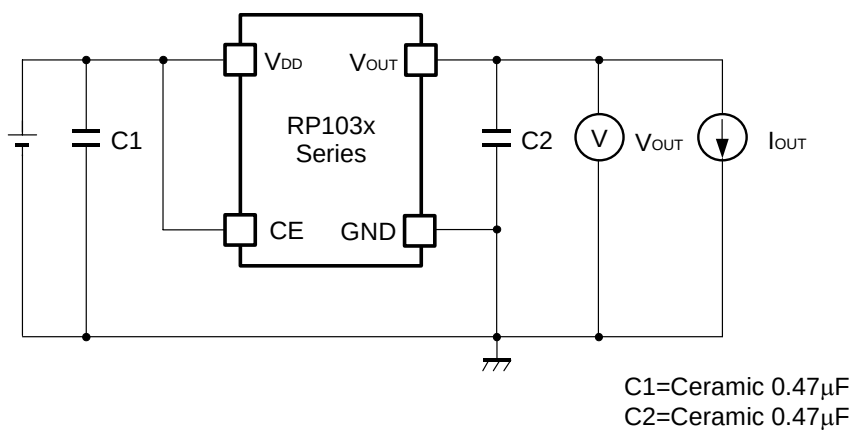


Basic Test Circuit

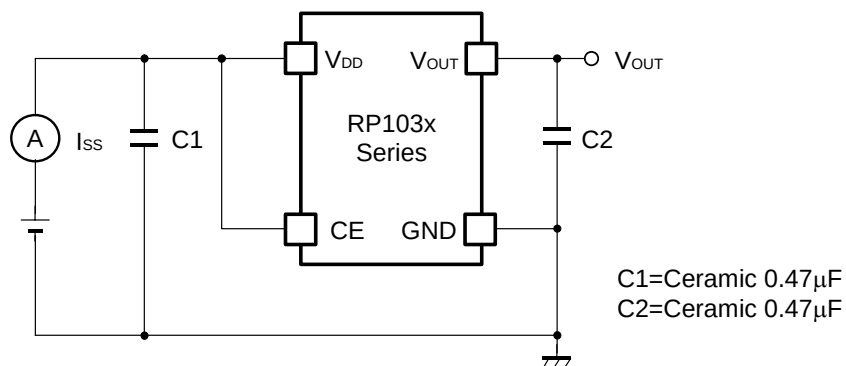

Test Circuit for Supply Current

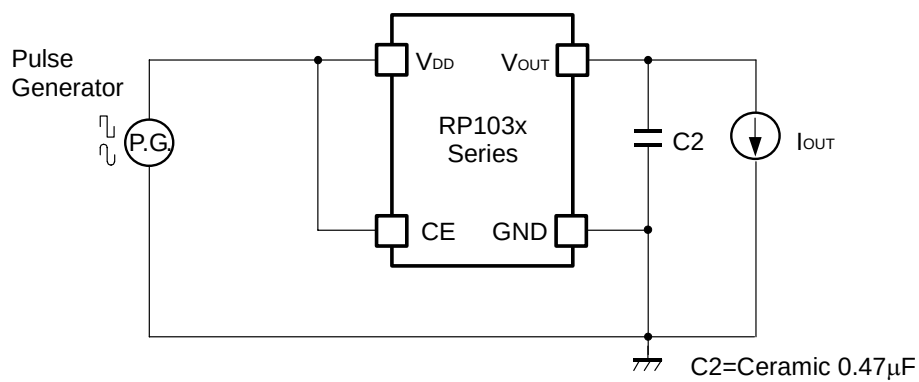

Test Circuit for Ripple Rejection



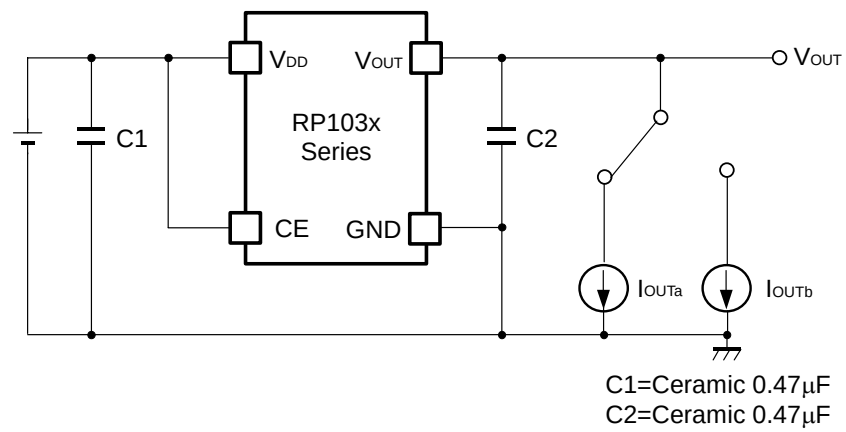


**Test Circuit for Load Transient Response**






## TYPICAL CHARACTERISTICS

### 1) Output Voltage vs. Output Current ( $C_1=0.47\mu\text{F}$ , $C_2=0.47\mu\text{F}$ , $T_{\text{opt}}=25^\circ\text{C}$ )

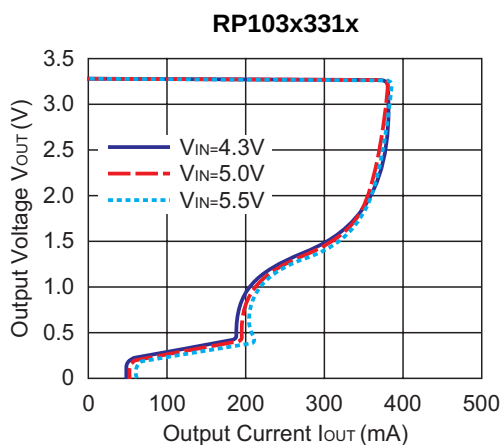
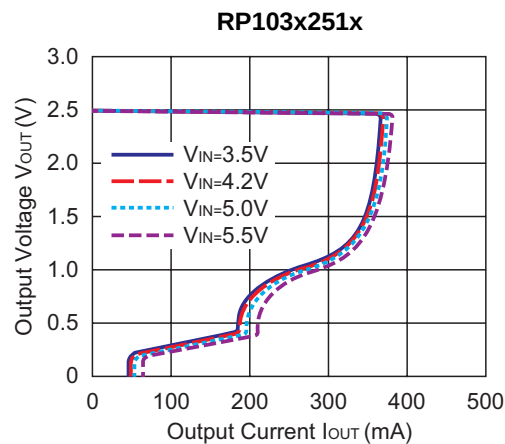
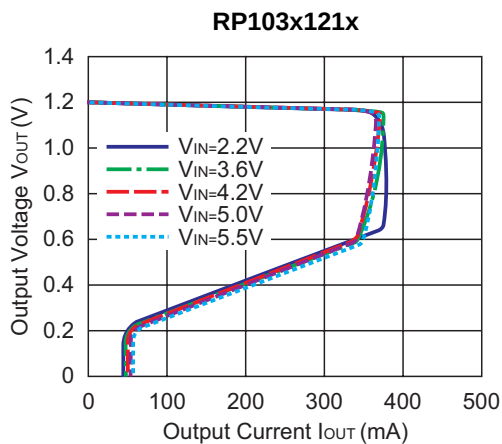


### 2) Output Voltage vs. Input Voltage ( $C_1=0.47\mu\text{F}$ , $C_2=0.47\mu\text{F}$ , $T_{\text{opt}}=25^\circ\text{C}$ )


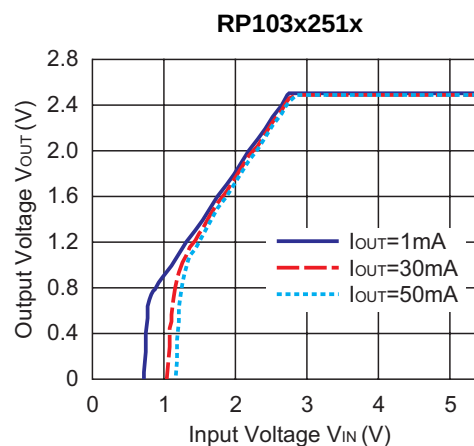
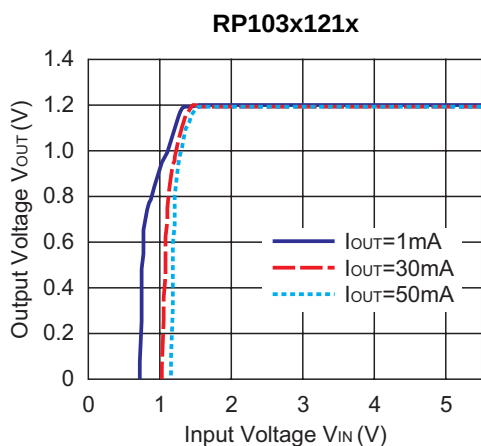


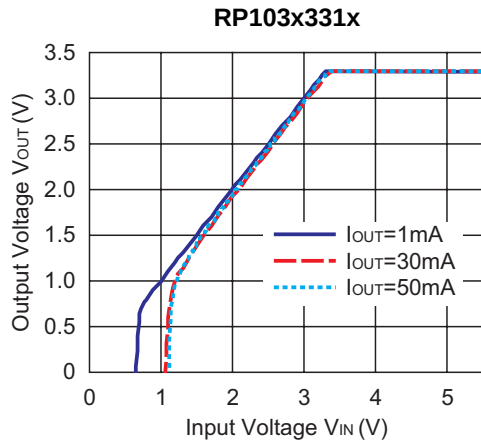



**3) Supply Current vs. Input Voltage ( $C1=0.47\mu\text{F}$ ,  $C2=0.47\mu\text{F}$ ,  $T_{opt}=25^\circ\text{C}$ )**

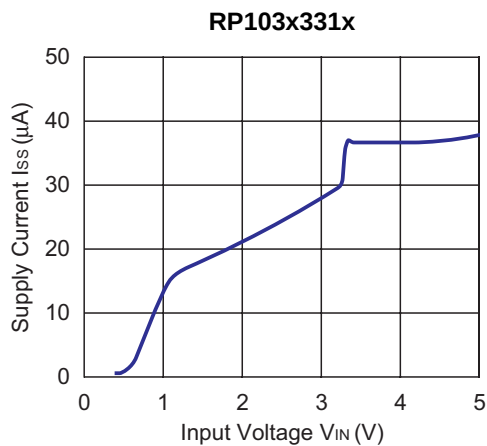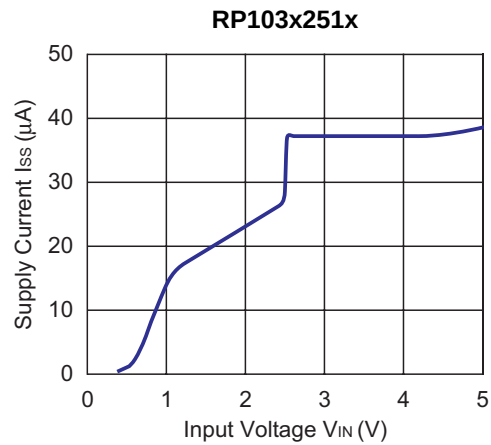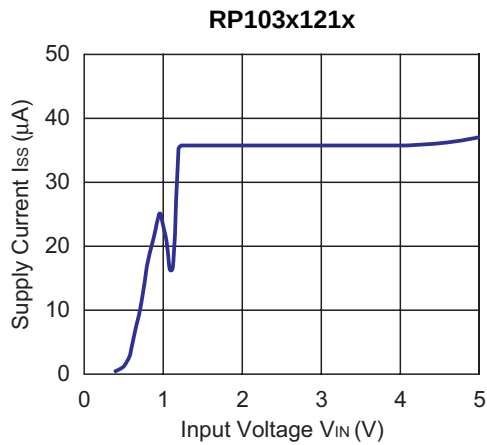


4) Output Voltage vs. Temperature ( $C_1=0.47\mu\text{F}$ ,  $C_2=0.47\mu\text{F}$ ,  $I_{\text{OUT}}=1\text{mA}$ )

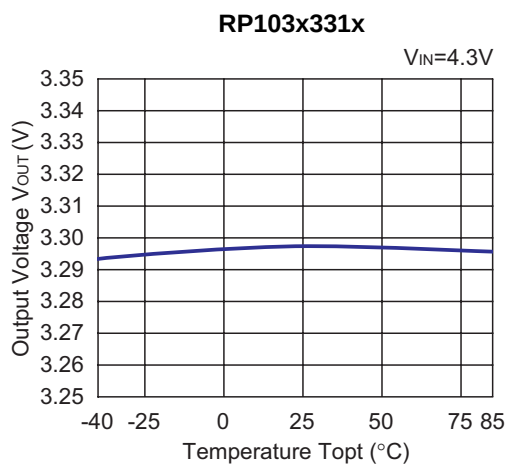
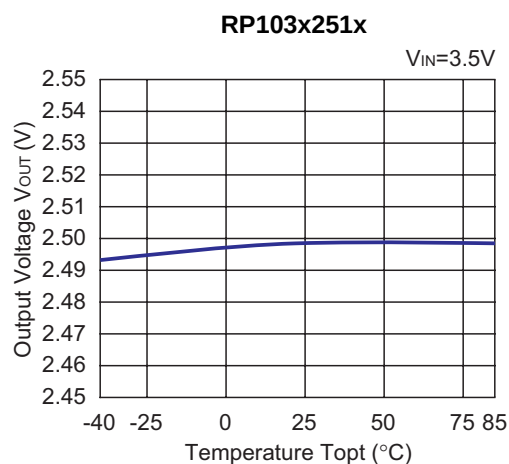
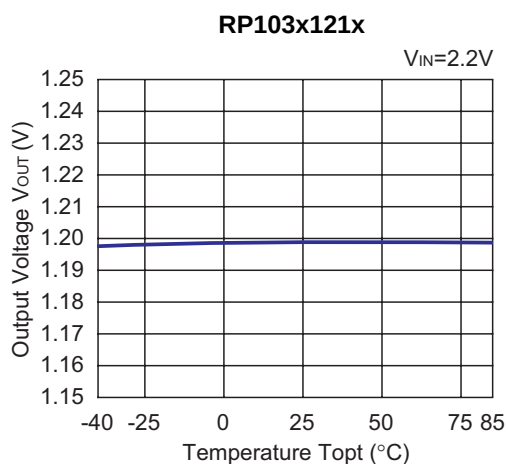


5) Supply Current vs. Temperature ( $C_1=0.47\mu\text{F}$ ,  $C_2=0.47\mu\text{F}$ ,  $I_{\text{OUT}}=0\text{mA}$ )

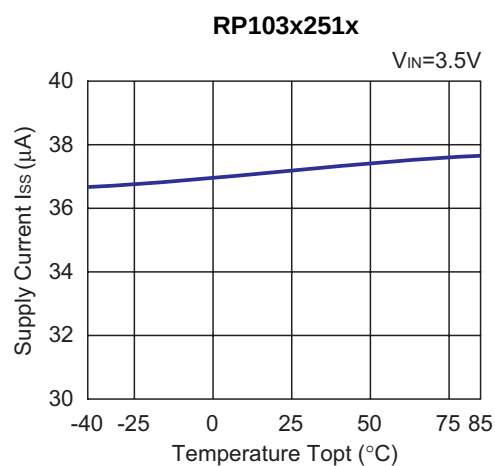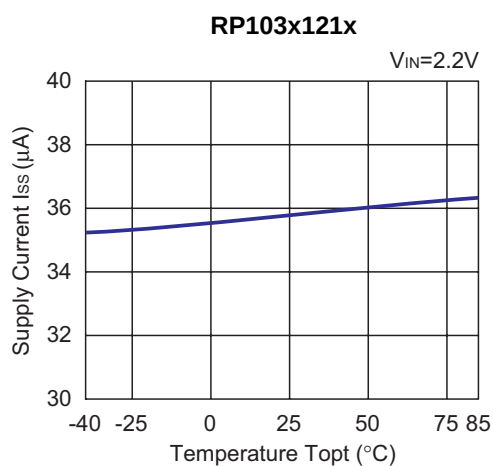


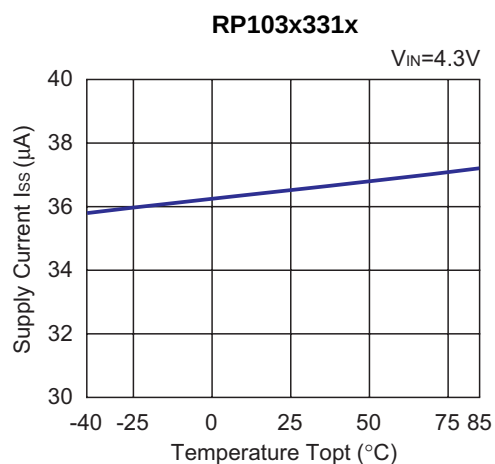



## 6) Dropout Voltage vs. Output Current ( $C1=0.47\mu F, C2=0.47\mu F$ )

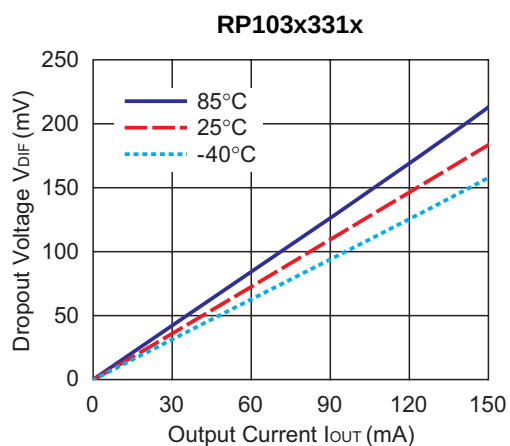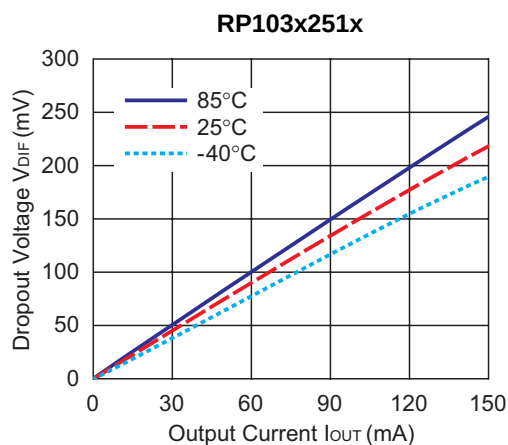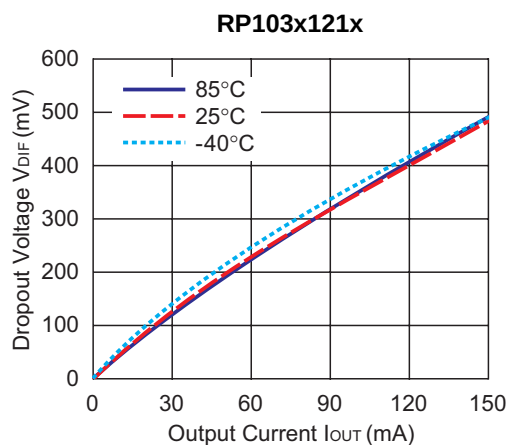



7) Dropout Voltage vs. Set Output Voltage ( $C_1=0.47\mu\text{F}$ ,  $C_2=0.47\mu\text{F}$ ,  $T_{\text{opt}}=25^\circ\text{C}$ )

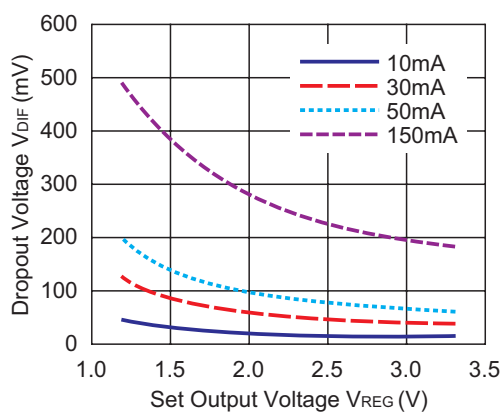


8) Ripple Rejection vs. Input Bias Voltage ( $C_1=0.47\mu\text{F}$ ,  $C_2=0.47\mu\text{F}$ ,  $\text{Ripple}=0.2\text{V}_{\text{P-P}}$ ,  $T_{\text{opt}}=25^\circ\text{C}$ )


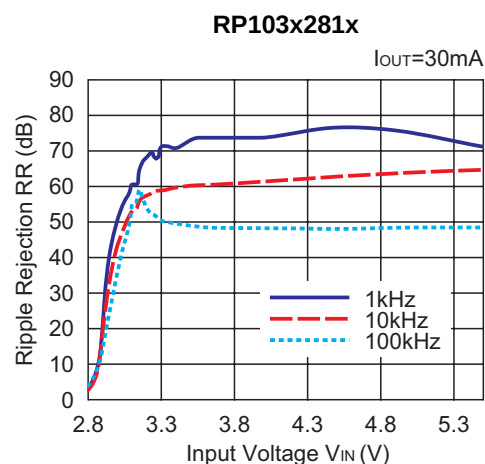
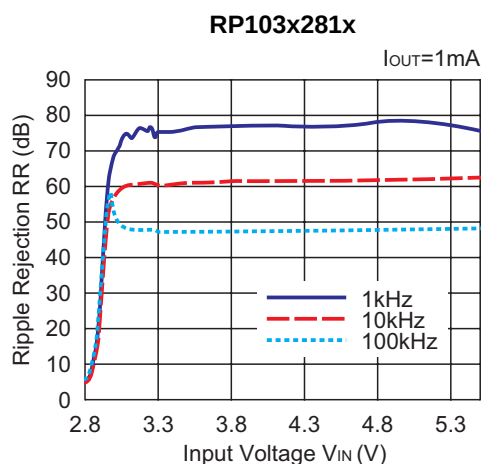


9) Ripple Rejection vs. Frequency ( $C_1=\text{none}$ ,  $C_2=0.47\mu\text{F}$ ,  $\text{Ripple}=0.2\text{V}_{\text{P-P}}$ )

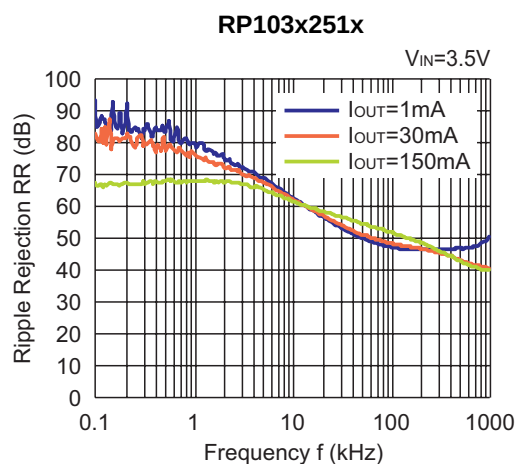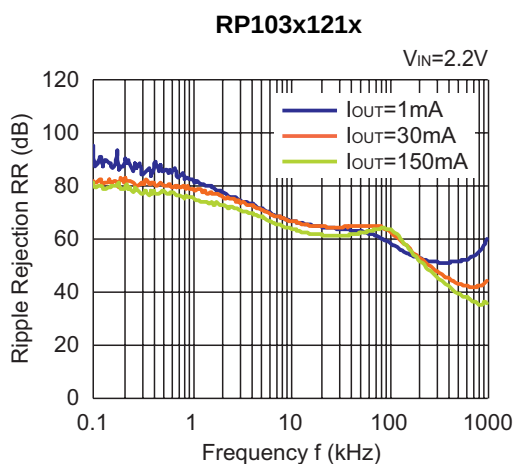


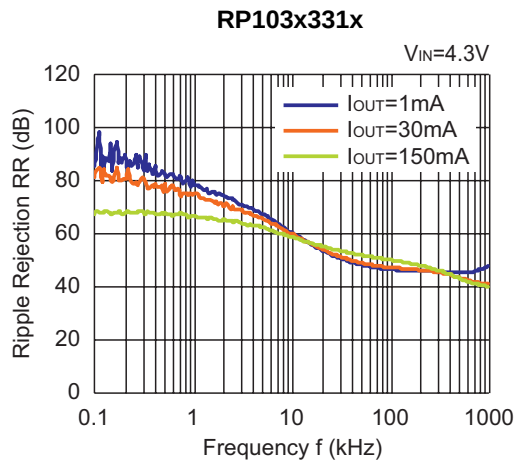







**10) Input Transient Response ( $I_{OUT}=30mA$ ,  $t_r=t_f=5\mu s$ ,  $T_{opt}=25^\circ C$ )**

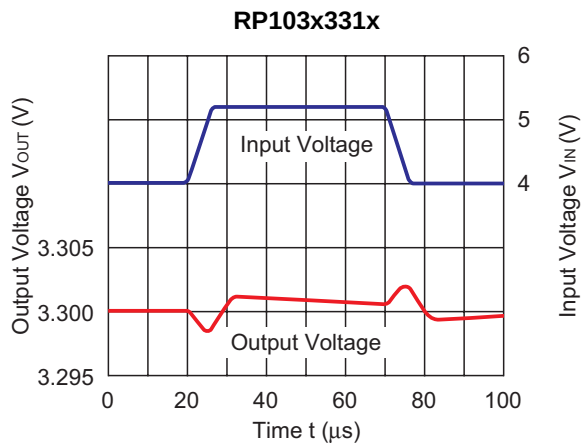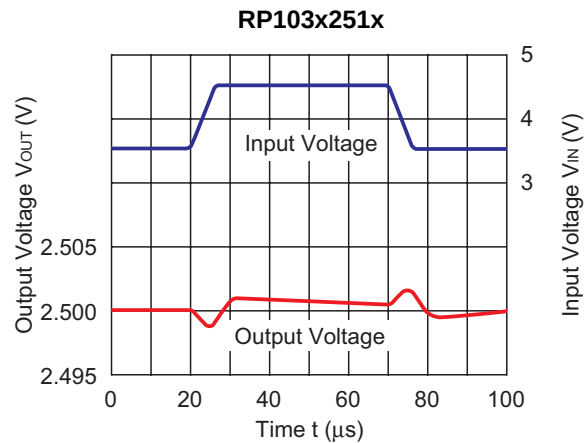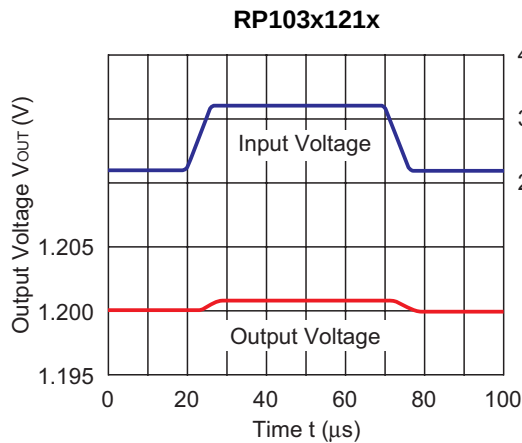




# 11) Load Transient Response ( $C1=0.47\mu\text{F}$ , $C2=0.47\mu\text{F}$ , $T_{\text{opt}}=25^{\circ}\text{C}$ )

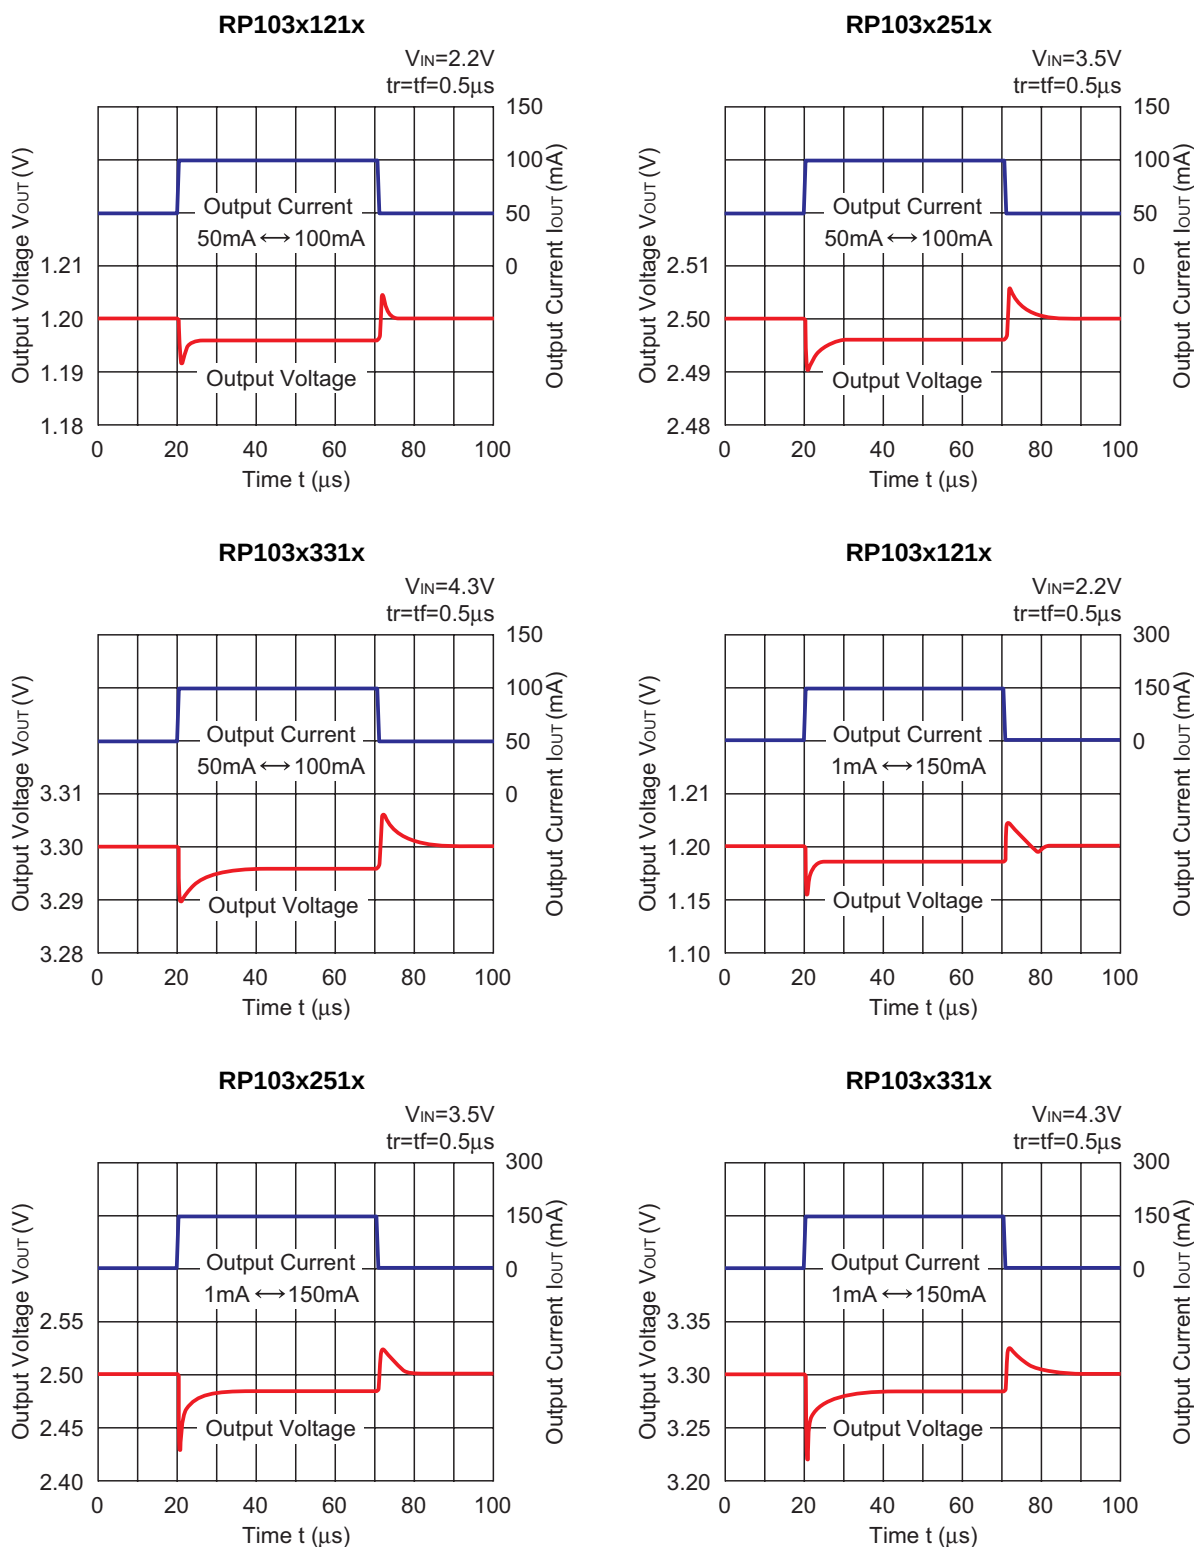



12) Turn On Speed with CE pin ( $C_1=0.47\mu\text{F}$ ,  $C_2=0.47\mu\text{F}$ ,  $T_{\text{opt}}=25^\circ\text{C}$ )

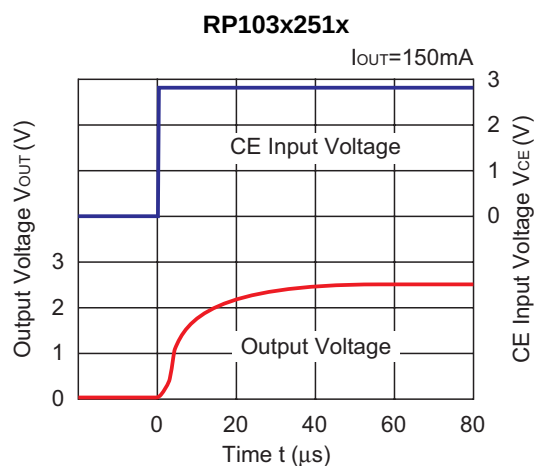
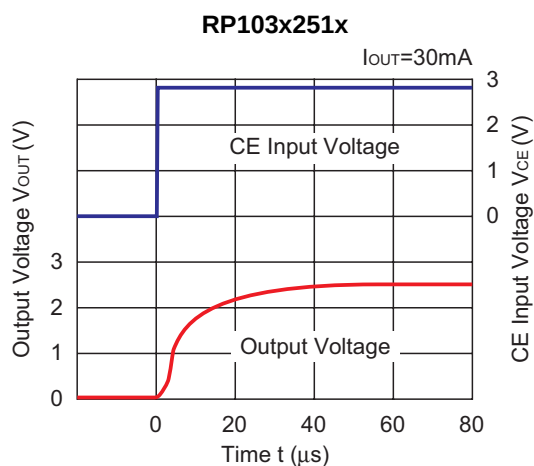
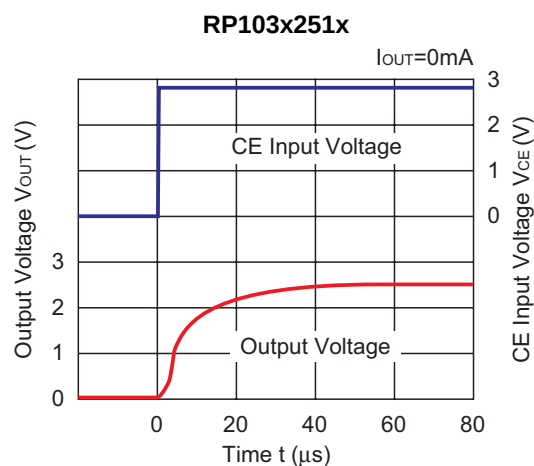
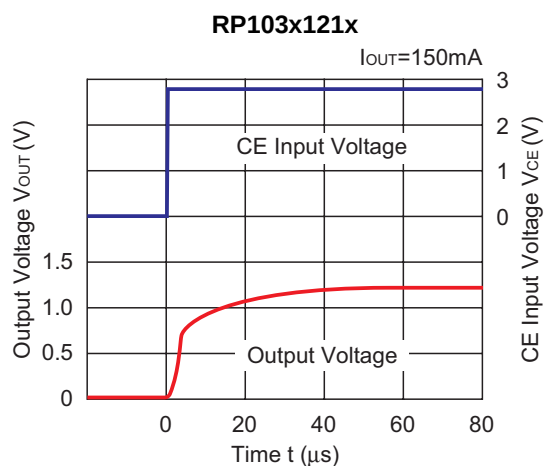
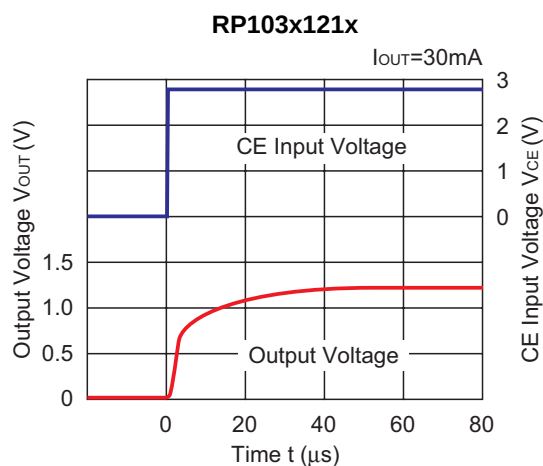
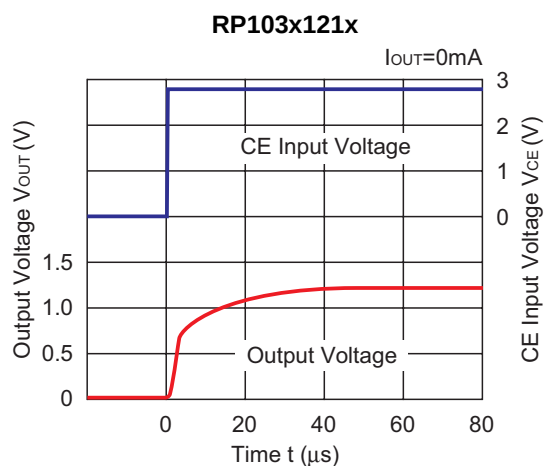





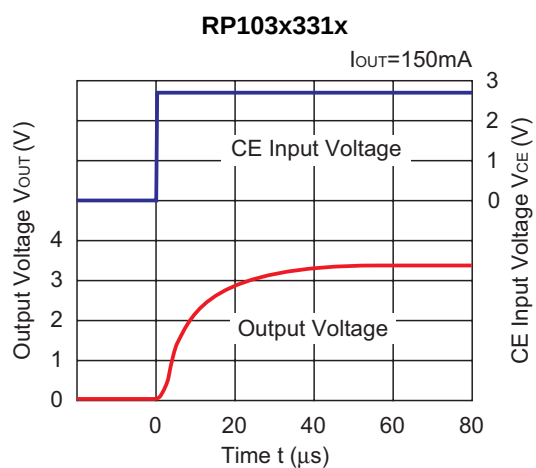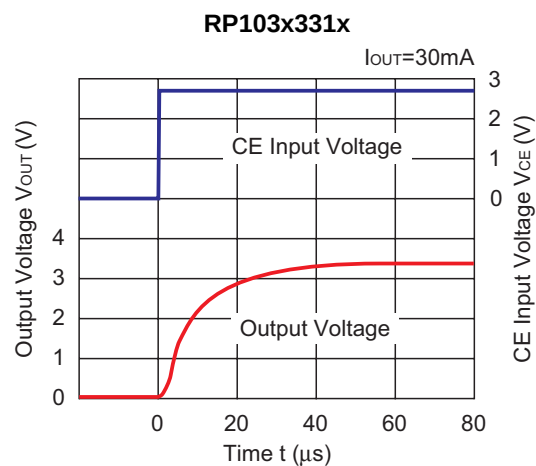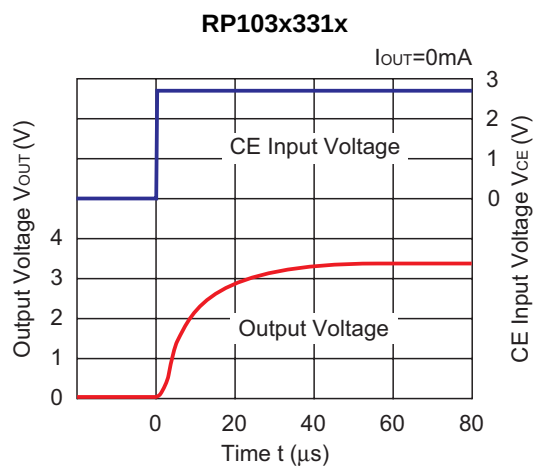





### 13) Turn Off Speed with CE pin (D Version) ( $C1=0.47\mu F$ , $C2=0.47\mu F$ , $T_{opt}=25^{\circ}C$ )

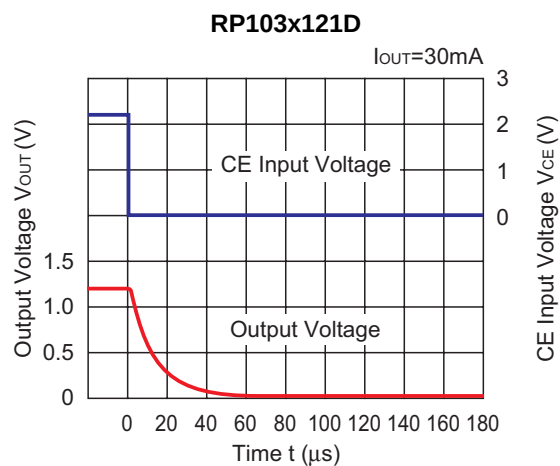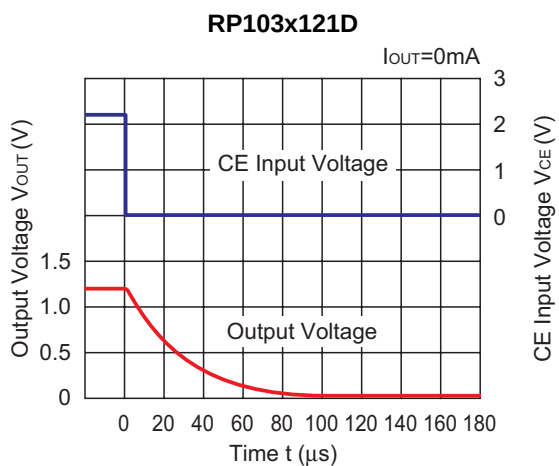

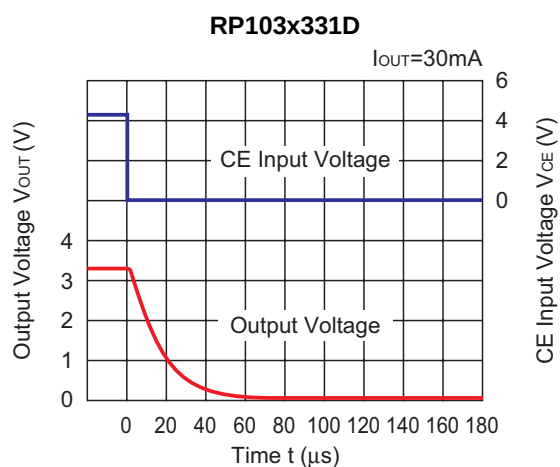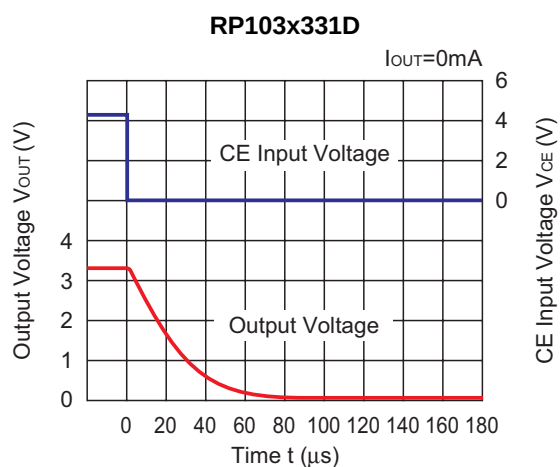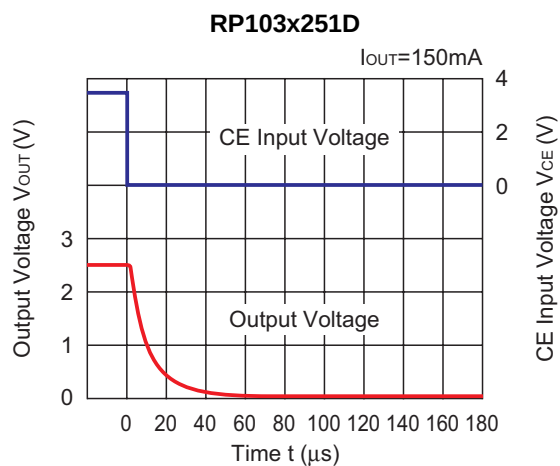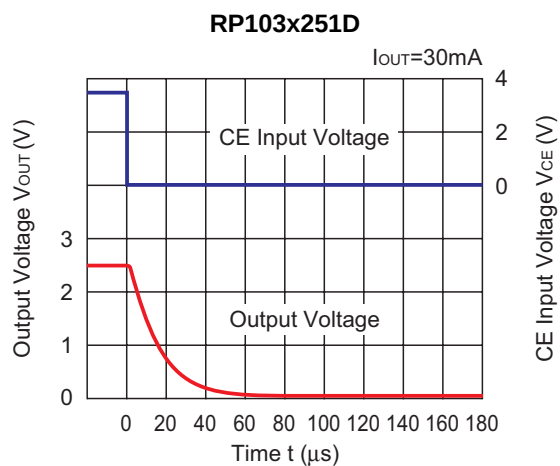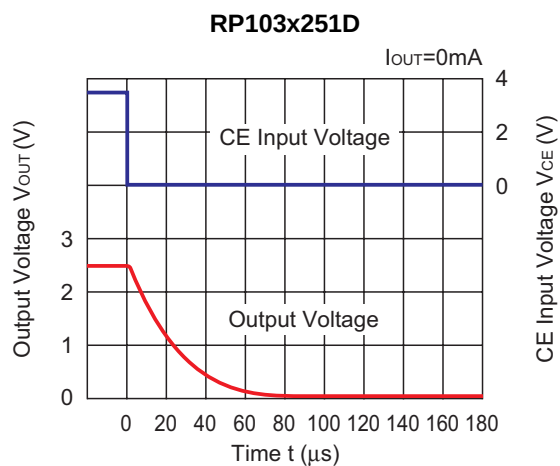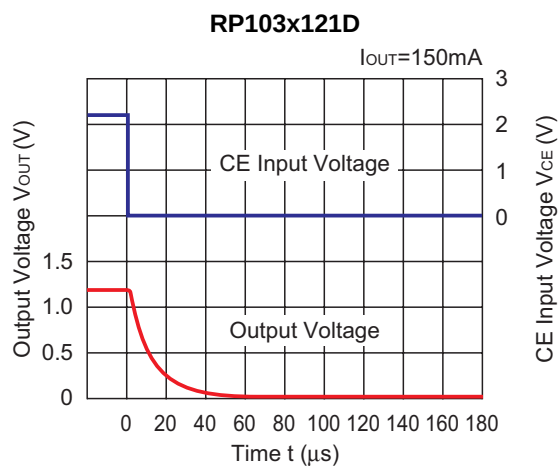

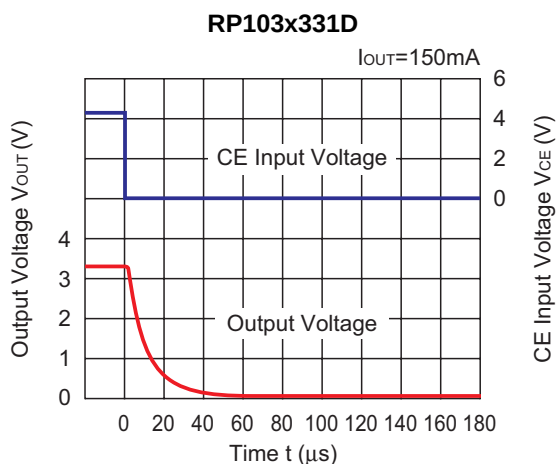

#### 14) Dropout Voltage vs. Temperature ( $C1=0.47\mu F$ , $C2=0.47\mu F$ )

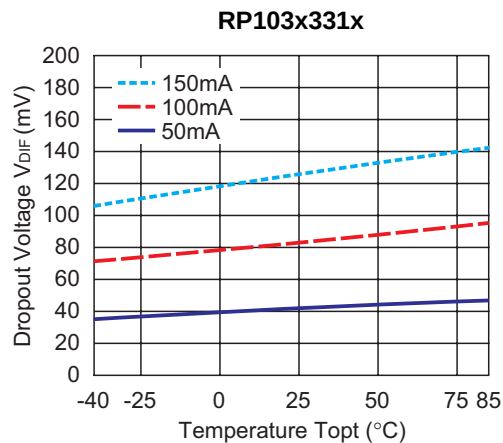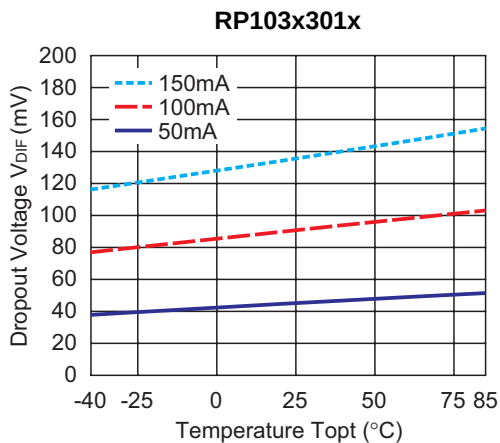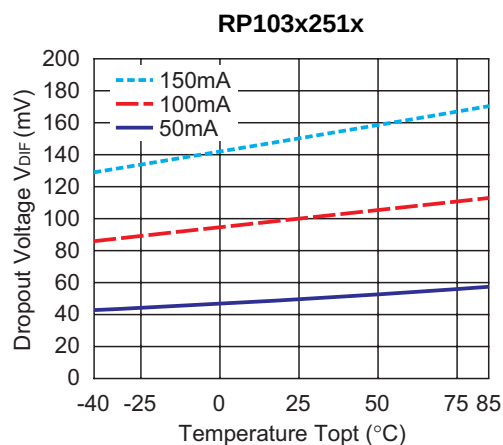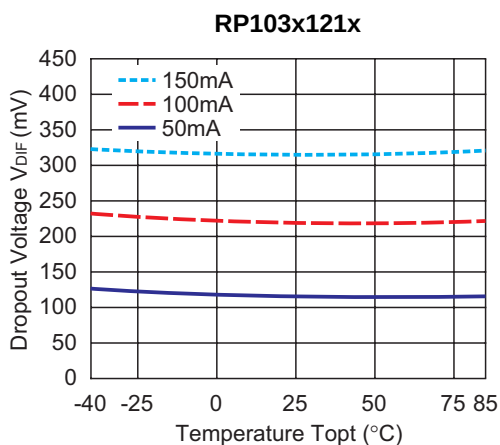

## ESR vs. Output Current

When using these ICs, consider the following points:



The relations between  $I_{OUT}$  (Output Current) and ESR of an output capacitor are shown below.

The conditions when the white noise level is under  $40\mu\text{V}$  (Avg.) are marked as the hatched area in the graph.

### Measurement conditions

Frequency Band : 10Hz to 2MHz

Temperature :  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$

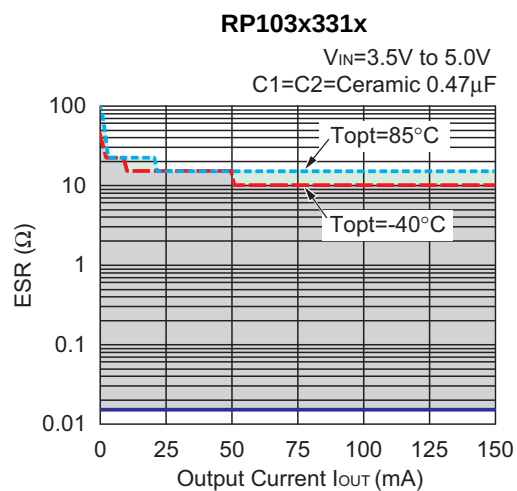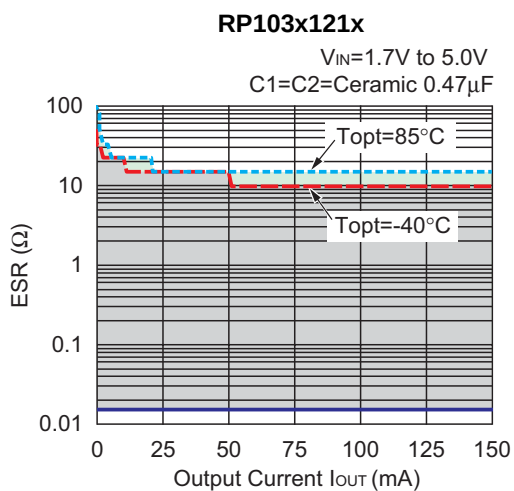


Unit: mm

The drawing consists of three views of a mechanical part:

- Front View (Top Left):** A square with side lengths of 1.00. It features a vertical centerline and a horizontal centerline. A feature is indicated by a dimension of  $\times 4$  and a tolerance of  $\pm 0.05$ .
- Top View (Bottom Left):** A rectangular view showing the top of the part. It has a width of 0.65 and a height of 0.05. A feature is indicated by a dimension of 0.05 and a tolerance of  $\pm 0.05$ .
- Bottom View (Right):** A complex view showing the bottom of the part. It has a width of 0.65 and a height of 0.05. It features a central diamond-shaped hole with a width of 0.48 and a height of 0.05. The hole is positioned 0.25 from the left and right edges. The bottom view also shows a feature with a dimension of 0.05 and a tolerance of  $\pm 0.05$ .

[illegible]

(1reel=10000pcs)

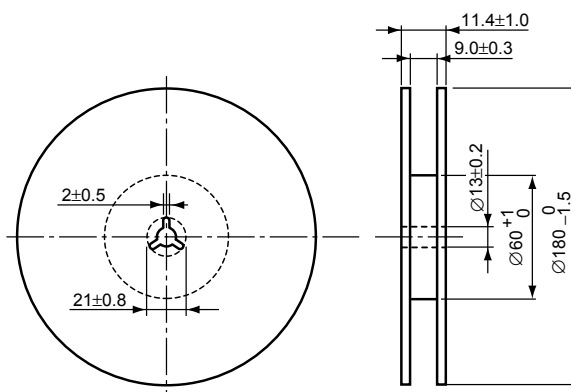

**RICOH**

## POWER DISSIPATION (PLP1010-4)


This specification is at mounted on board. Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:

### Measurement Conditions


|                  | Standard Land Pattern                            |
|------------------|--------------------------------------------------|
| Environment      | Mounting on Board (Wind velocity=0m/s)           |
| Board Material   | Glass cloth epoxy plastic (Double sided)         |
| Board Dimensions | 40mm × 40mm × 1.6mm                              |
| Copper Ratio     | Top side : Approx. 50% , Back side : Approx. 50% |
| Through-hole     | φ0.54mm × 24pcs                                  |

### Measurement Result (T<sub>opt</sub>=25°C, T<sub>jmax</sub>=125°C)

|                    | Standard Land Pattern                                                        |
|--------------------|------------------------------------------------------------------------------|
| Power Dissipation  | 400mW                                                                        |
| Thermal Resistance | $\theta_{ja} = (125 - 25^\circ\text{C}) / 0.4\text{W} = 250^\circ\text{C/W}$ |
| Thermal Resistance | $\theta_{jc} = 67^\circ\text{C/W}$                                           |

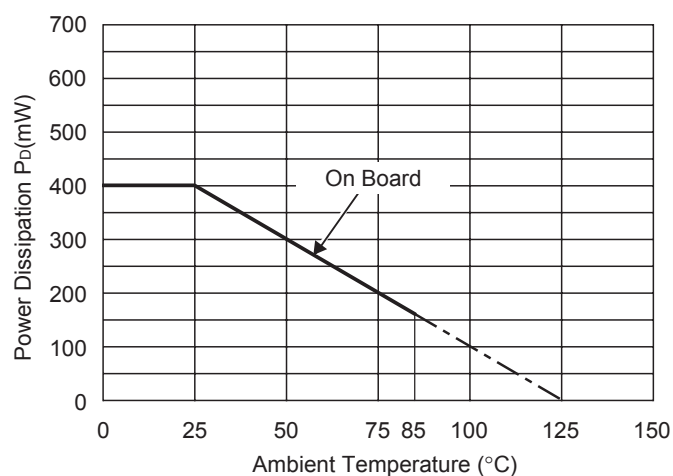


Power Dissipation

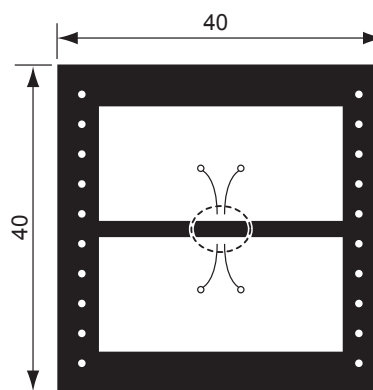

Measurement Board Pattern

○ IC Mount Area (Unit : mm)

## RECOMMENDED LAND PATTERN

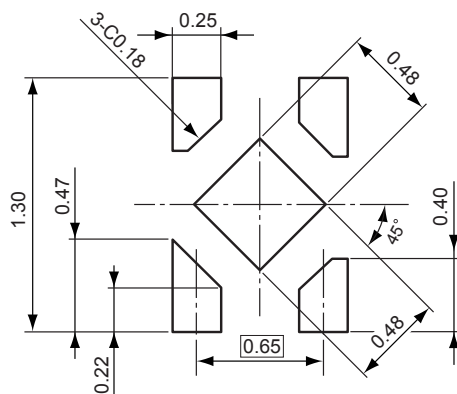


(Unit: mm)

# RICOH


## • SOT-23-5 (SC-74A)

Unit: mm

## PACKAGE DIMENSIONS

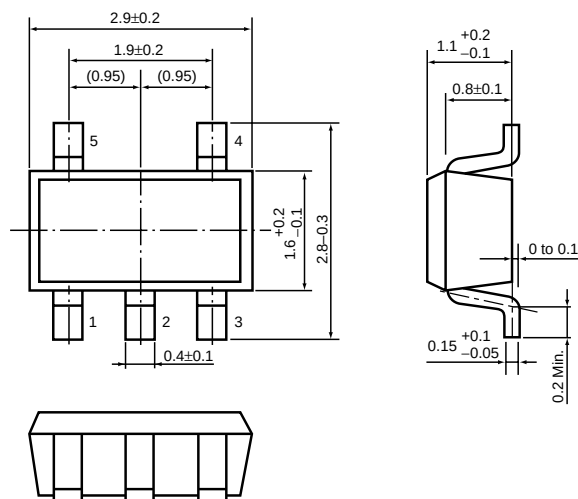


## TAPING SPECIFICATION

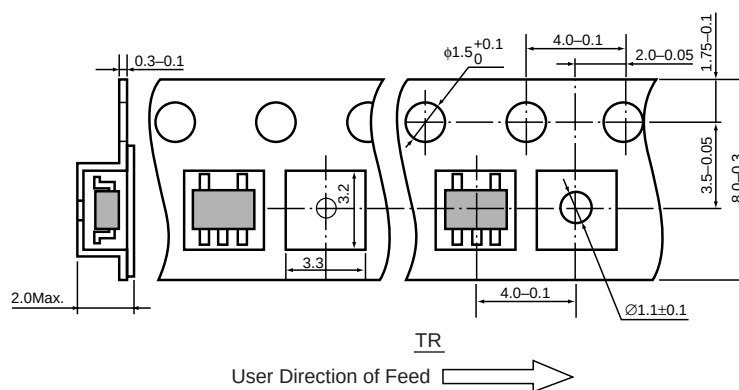

## TAPING REEL DIMENSIONS REUSE REEL (EIAJ-RRM-08Bc)

(1reel=3000pcs)

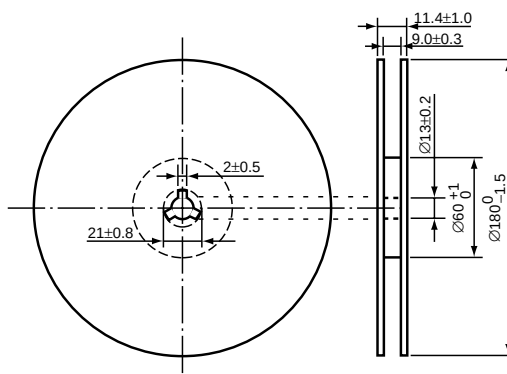**RICOH**

## POWER DISSIPATION (SOT-23-5)

This specification is at mounted on board. Power Dissipation ( $P_D$ ) depends on conditions of mounting on board.

This specification is based on the measurement at the condition below:

(Power Dissipation (SOT-23-5) is substitution of SOT-23-6.)



### Measurement Conditions

|                  | Standard Land Pattern                            |
|------------------|--------------------------------------------------|
| Environment      | Mounting on Board (Wind velocity=0m/s)           |
| Board Material   | Glass cloth epoxy plactic (Double sided)         |
| Board Dimensions | 40mm × 40mm × 1.6mm                              |
| Copper Ratio     | Top side : Approx. 50% , Back side : Approx. 50% |
| Through-hole     | φ0.5mm × 44pcs                                   |

### Measurement Result

( $T_{opt}=25^{\circ}\text{C}$ ,  $T_{jmax}=125^{\circ}\text{C}$ )


|                    | Standard Land Pattern                                                     | Free Air                 |
|--------------------|---------------------------------------------------------------------------|--------------------------|
| Power Dissipation  | 420mW                                                                     | 250mW                    |
| Thermal Resistance | $\theta_{ja}=(125-25^{\circ}\text{C})/0.42\text{W}=263^{\circ}\text{C/W}$ | 400 $^{\circ}\text{C/W}$ |

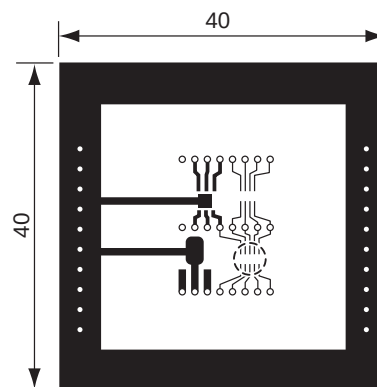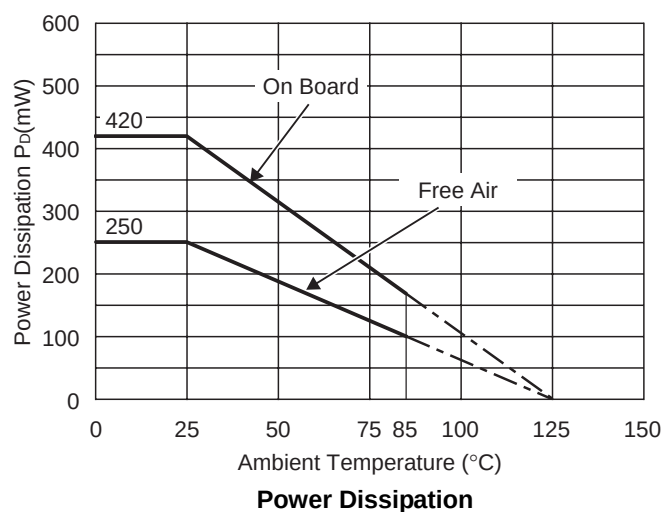

Measurement Board Pattern

○ IC Mount Area Unit : mm

## RECOMMENDED LAND PATTERN

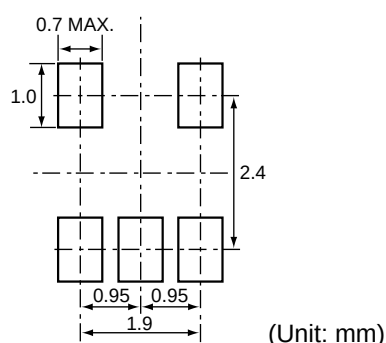


# RICOH




## • SC-82AB

Unit: mm

## PACKAGE DIMENSIONS

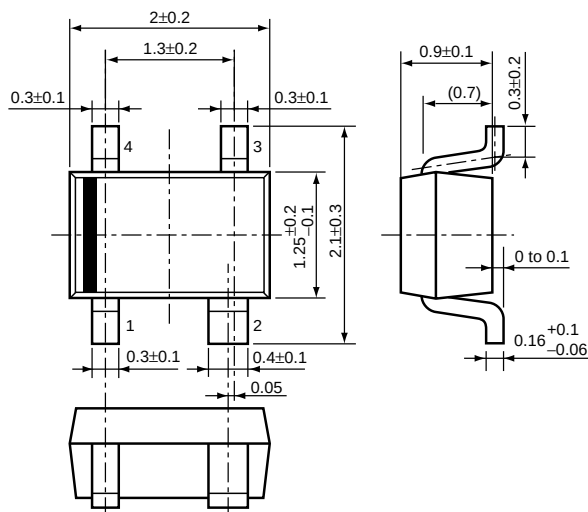


## TAPING SPECIFICATION

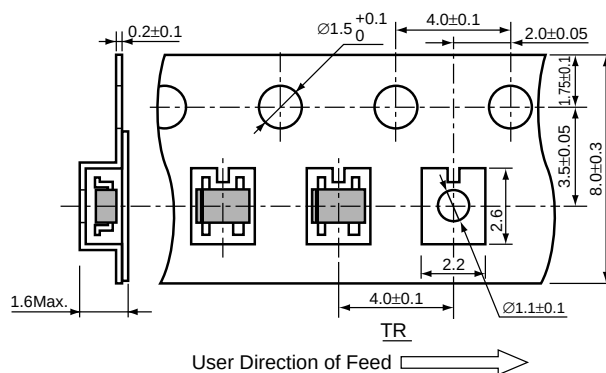

## TAPING REEL DIMENSIONS

(1reel=3000pcs)

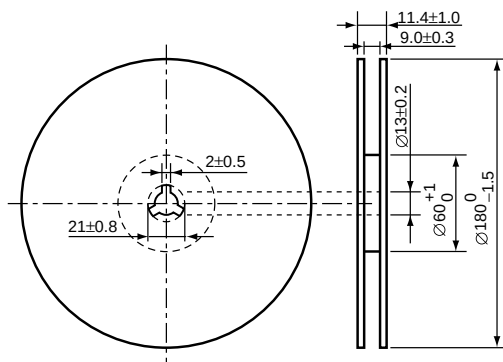**RICOH**

## POWER DISSIPATION (SC-82AB)

This specification is at mounted on board. Power Dissipation ( $P_D$ ) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:



### Measurement Conditions

|                  | Standard Land Pattern                            |
|------------------|--------------------------------------------------|
| Environment      | Mounting on Board (Wind velocity=0m/s)           |
| Board Material   | Glass cloth epoxy plastic (Double sided)         |
| Board Dimensions | 40mm × 40mm × 1.6mm                              |
| Copper Ratio     | Top side : Approx. 50% , Back side : Approx. 50% |
| Through-hole     | φ0.5mm × 44pcs                                   |

### Measurement Result

( $T_{opt}=25^{\circ}\text{C}$ ,  $T_{jmax}=125^{\circ}\text{C}$ )


|                    | Standard Land Pattern                                                     | Free Air                 |
|--------------------|---------------------------------------------------------------------------|--------------------------|
| Power Dissipation  | 380mW                                                                     | 150mW                    |
| Thermal Resistance | $\theta_{ja}=(125-25^{\circ}\text{C})/0.38\text{W}=263^{\circ}\text{C/W}$ | 667 $^{\circ}\text{C/W}$ |

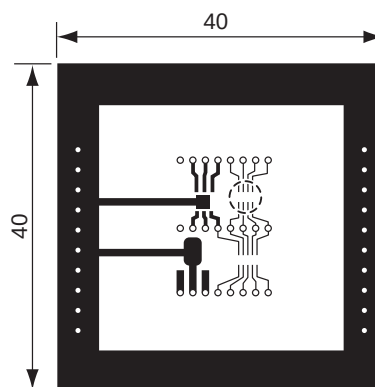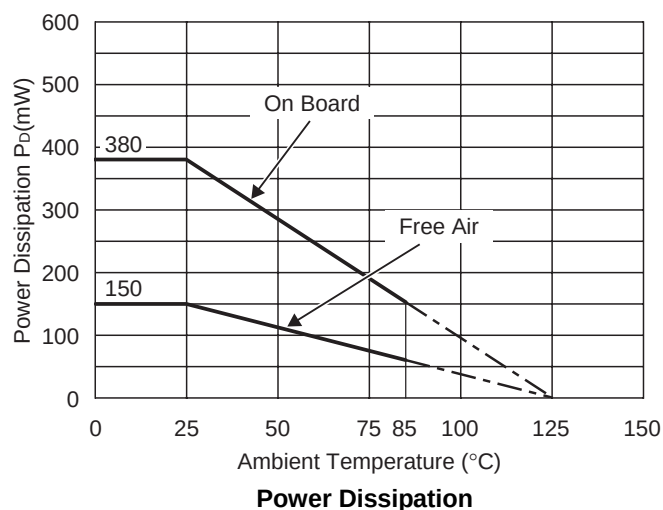

Measurement Board Pattern

○ IC Mount Area (Unit : mm)


## RECOMMENDED LAND PATTERN



(Unit: mm)

## RP103K SERIES MARK SPECIFICATION

### • PLP1010-4



①, ② : Product Code (Refer to Part Number vs. Product Code)

③, ④ : Lot Number


### • Part Number vs. Product Code

| Part Number | Product Code |   |
|-------------|--------------|---|
|             | ①            | ② |
| RP103K121B  | 7            | A |
| RP103K131B  | 7            | B |
| RP103K151B  | 7            | C |
| RP103K181B  | 7            | D |
| RP103K181B5 | 7            | E |
| RP103K191B  | 7            | F |
| RP103K201B  | 7            | G |
| RP103K251B  | 7            | H |
| RP103K261B  | 7            | J |
| RP103K271B  | 7            | K |
| RP103K281B  | 7            | L |
| RP103K281B5 | 7            | M |
| RP103K291B  | 7            | N |
| RP103K301B  | 7            | P |
| RP103K311B  | 7            | Q |
| RP103K331B  | 7            | R |
| RP103K231B  | 7            | S |

| Part Number | Product Code |   |
|-------------|--------------|---|
|             | ①            | ② |
| RP103K121D  | 8            | A |
| RP103K131D  | 8            | B |
| RP103K151D  | 8            | C |
| RP103K181D  | 8            | D |
| RP103K181D5 | 8            | E |
| RP103K191D  | 8            | F |
| RP103K201D  | 8            | G |
| RP103K251D  | 8            | H |
| RP103K261D  | 8            | J |
| RP103K271D  | 8            | K |
| RP103K281D  | 8            | L |
| RP103K281D5 | 8            | M |
| RP103K291D  | 8            | N |
| RP103K301D  | 8            | P |
| RP103K311D  | 8            | Q |
| RP103K331D  | 8            | R |
| RP103K231D  | 8            | S |

## RP103N SERIES MARK SPECIFICATION

## ● SOT-23-5



①, ②, ③ : Product Code (Refer to Part Number vs. Product Code)

④, ⑤ : Lot Number


## ● Part Number vs. Product Code

| Part Number | Product Code |   |   |
|-------------|--------------|---|---|
|             | ①            | ② | ③ |
| RP103N121B  | 8            | 0 | A |
| RP103N131B  | 8            | 0 | B |
| RP103N151B  | 8            | 0 | C |
| RP103N181B  | 8            | 0 | D |
| RP103N181B5 | 8            | 0 | E |
| RP103N191B  | 8            | 0 | F |
| RP103N201B  | 8            | 0 | G |
| RP103N251B  | 8            | 0 | H |
| RP103N261B  | 8            | 0 | J |
| RP103N271B  | 8            | 0 | K |
| RP103N281B  | 8            | 0 | L |
| RP103N281B5 | 8            | 0 | M |
| RP103N291B  | 8            | 0 | N |
| RP103N301B  | 8            | 0 | P |
| RP103N311B  | 8            | 0 | Q |
| RP103N331B  | 8            | 0 | R |
| RP103N231B  | 8            | 0 | S |

| Part Number | Product Code |   |   |
|-------------|--------------|---|---|
|             | ①            | ② | ③ |
| RP103N121D  | 8            | 1 | A |
| RP103N131D  | 8            | 1 | B |
| RP103N151D  | 8            | 1 | C |
| RP103N181D  | 8            | 1 | D |
| RP103N181D5 | 8            | 1 | E |
| RP103N191D  | 8            | 1 | F |
| RP103N201D  | 8            | 1 | G |
| RP103N251D  | 8            | 1 | H |
| RP103N261D  | 8            | 1 | J |
| RP103N271D  | 8            | 1 | K |
| RP103N281D  | 8            | 1 | L |
| RP103N281D5 | 8            | 1 | M |
| RP103N291D  | 8            | 1 | N |
| RP103N301D  | 8            | 1 | P |
| RP103N311D  | 8            | 1 | Q |
| RP103N331D  | 8            | 1 | R |
| RP103N231D  | 8            | 1 | S |

## RP103Q SERIES MARK SPECIFICATION

### • SC-82AB



①, ② : Product Code (Refer to Part Number vs. Product Code)

③, ④ : Lot Number

### • Part Number vs. Product Code

| Part Number | Product Code |   |
|-------------|--------------|---|
|             | ①            | ② |
| RP103Q121B  | G            | 0 |
| RP103Q131B  | G            | 1 |
| RP103Q151B  | G            | 2 |
| RP103Q181B  | G            | 3 |
| RP103Q181B5 | G            | 4 |
| RP103Q191B  | G            | 5 |
| RP103Q201B  | G            | 6 |
| RP103Q251B  | G            | 7 |
| RP103Q261B  | G            | 8 |
| RP103Q271B  | G            | 9 |
| RP103Q281B  | H            | 0 |
| RP103Q281B5 | H            | 1 |
| RP103Q291B  | H            | 2 |
| RP103Q301B  | H            | 3 |
| RP103Q311B  | H            | 4 |
| RP103Q331B  | H            | 5 |
| RP103Q231B  | H            | 6 |

| Part Number | Product Code |   |
|-------------|--------------|---|
|             | ①            | ② |
| RP103Q121D  | J            | 0 |
| RP103Q131D  | J            | 1 |
| RP103Q151D  | J            | 2 |
| RP103Q181D  | J            | 3 |
| RP103Q181D5 | J            | 4 |
| RP103Q191D  | J            | 5 |
| RP103Q201D  | J            | 6 |
| RP103Q251D  | J            | 7 |
| RP103Q261D  | J            | 8 |
| RP103Q271D  | J            | 9 |
| RP103Q281D  | K            | 0 |
| RP103Q281D5 | K            | 1 |
| RP103Q291D  | K            | 2 |
| RP103Q301D  | K            | 3 |
| RP103Q311D  | K            | 4 |
| RP103Q331D  | K            | 5 |
| RP103Q231D  | K            | 6 |