



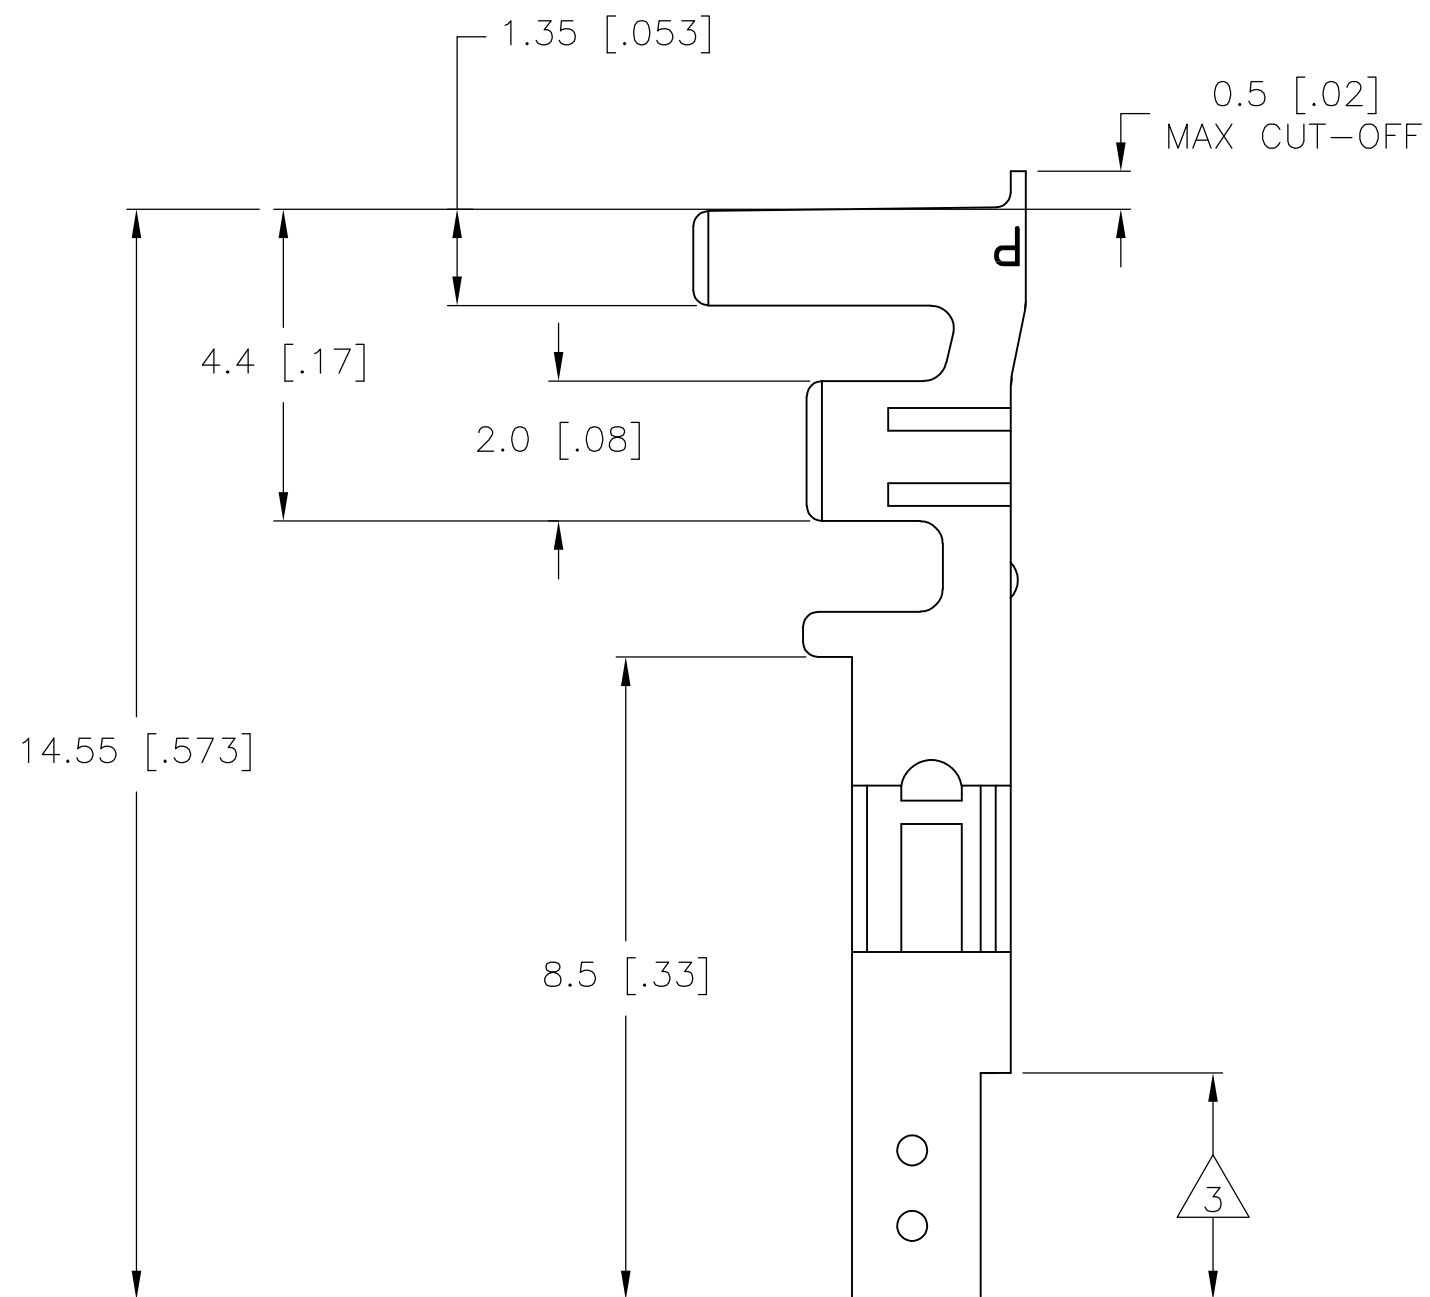


- 1 WIRE RANGE: 0.2–0.8mm² (24–18 AWG).
- 2 INSULATION RANGE: 1.5–2.4 DIA.
- 3 FINISH: 0.76μm MIN GOLD OVER 1.27μm MIN NICKEL REQUIRED ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 4 FINISH: 2.54μm MIN TIN ON ALL SURFACES IN THIS AREA.

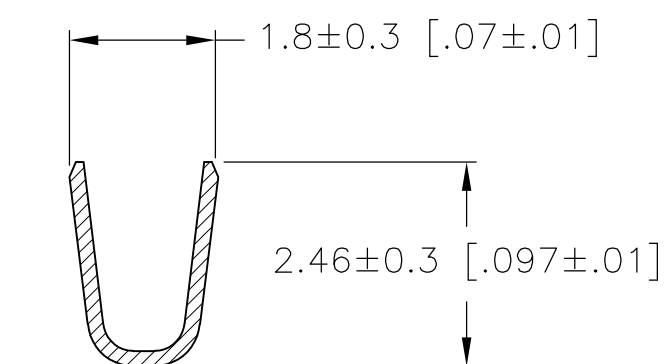

SECTION C-C

GOLD		PHOS. BRZ.	1586315-4
PRE-TIN		PHOS. BRZ.	1586315-3
GOLD		BRASS	1586315-2
PRE-TIN		BRASS	1586315-1
FINISH:		MATERIAL:	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. HOOVER 14-OCT-2003		 TE Connectivity	
		CHK D. COLEY 14-OCT-2003			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: APVD D. COLEY 14-OCT-2003		NAME TERMINAL LOOSE PIECE, SOCKET VAL-U-LOK(TM)	
		PRODUCT SPEC			
MATERIAL		APPLICATION SPEC		SIZE A2	
FINISH		WEIGHT		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-1586315	
				RESTRICTED TO —	
				SCALE 10:1	
				SHEET 1 OF 1	
				REV B1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586315-2](#)