

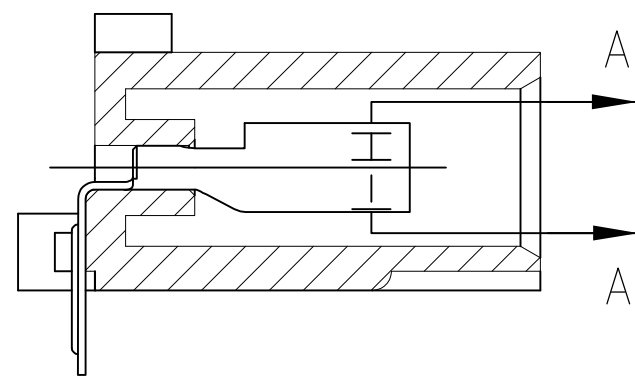
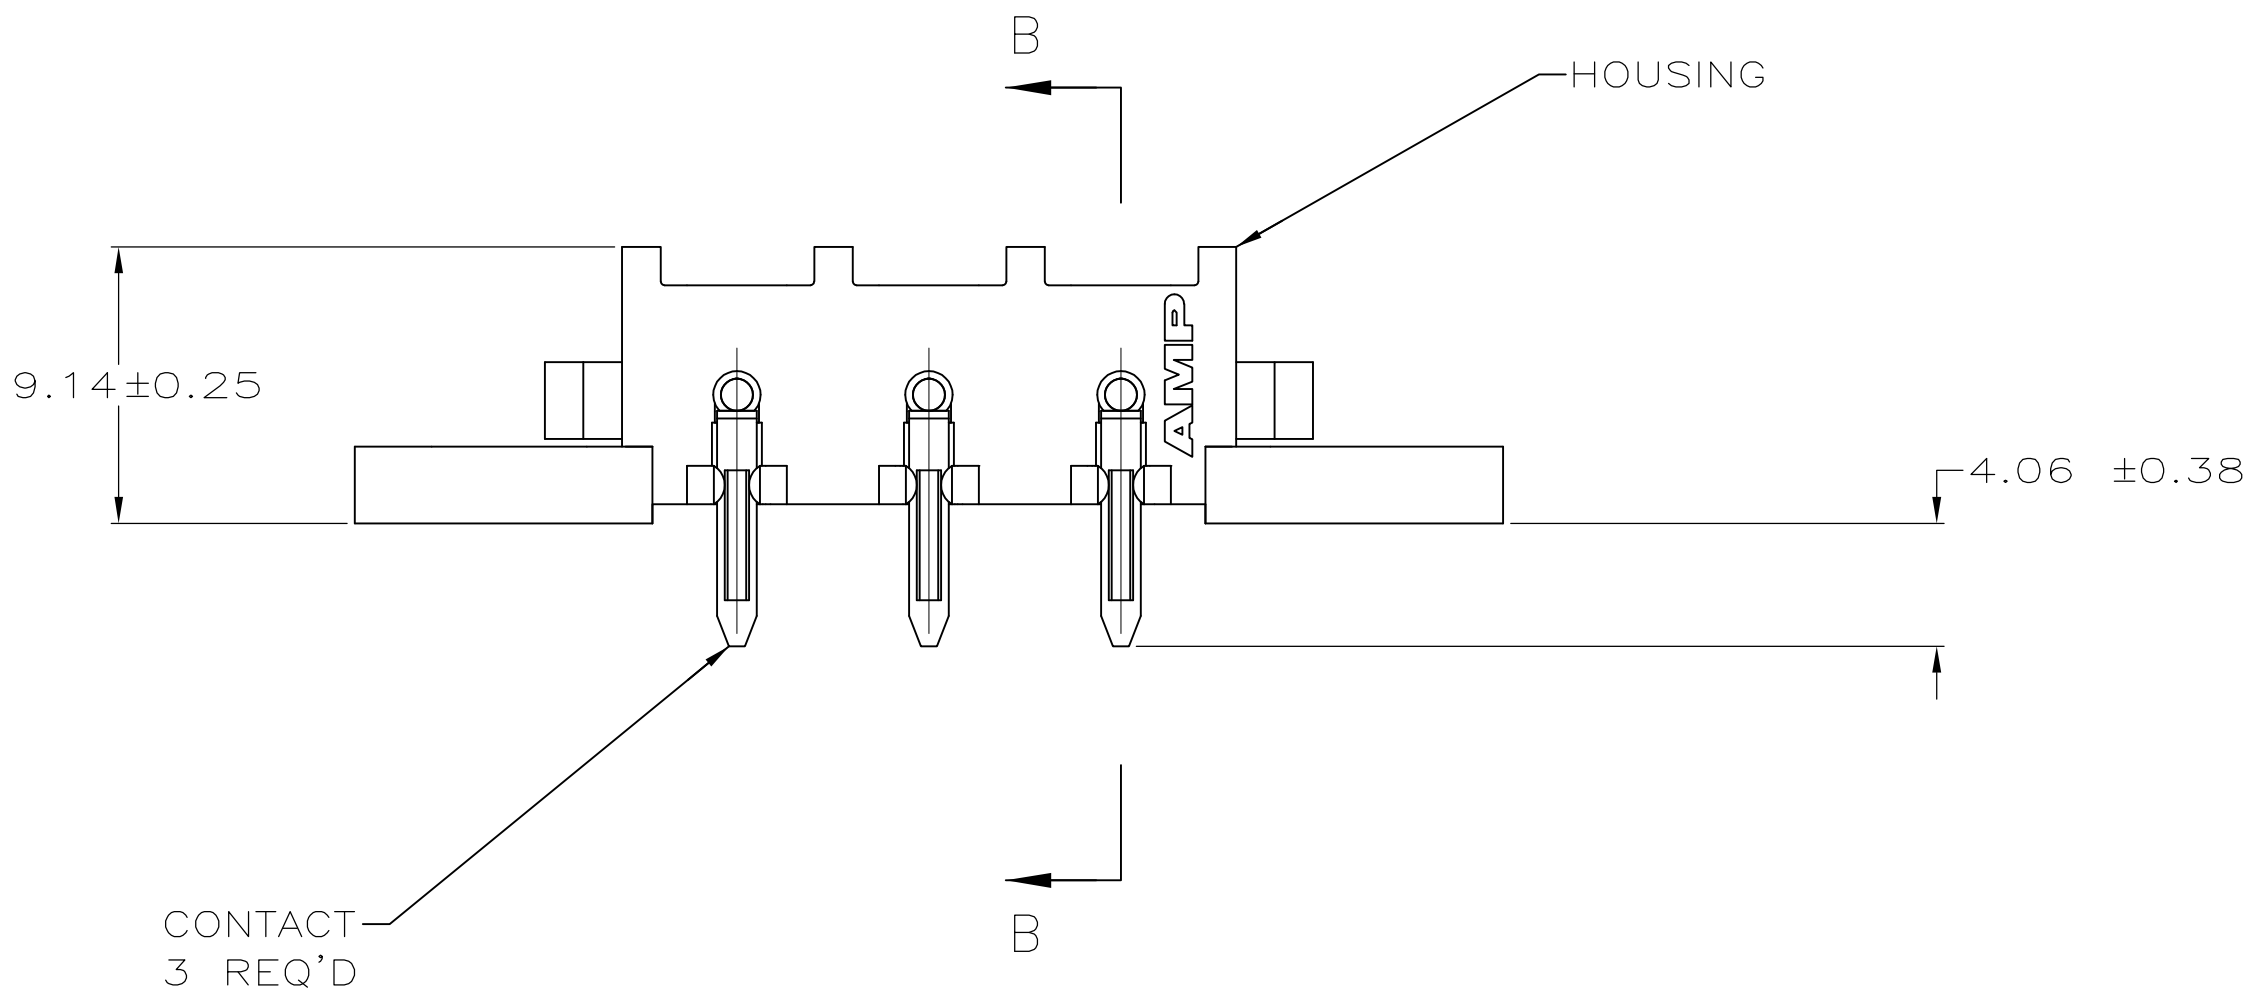
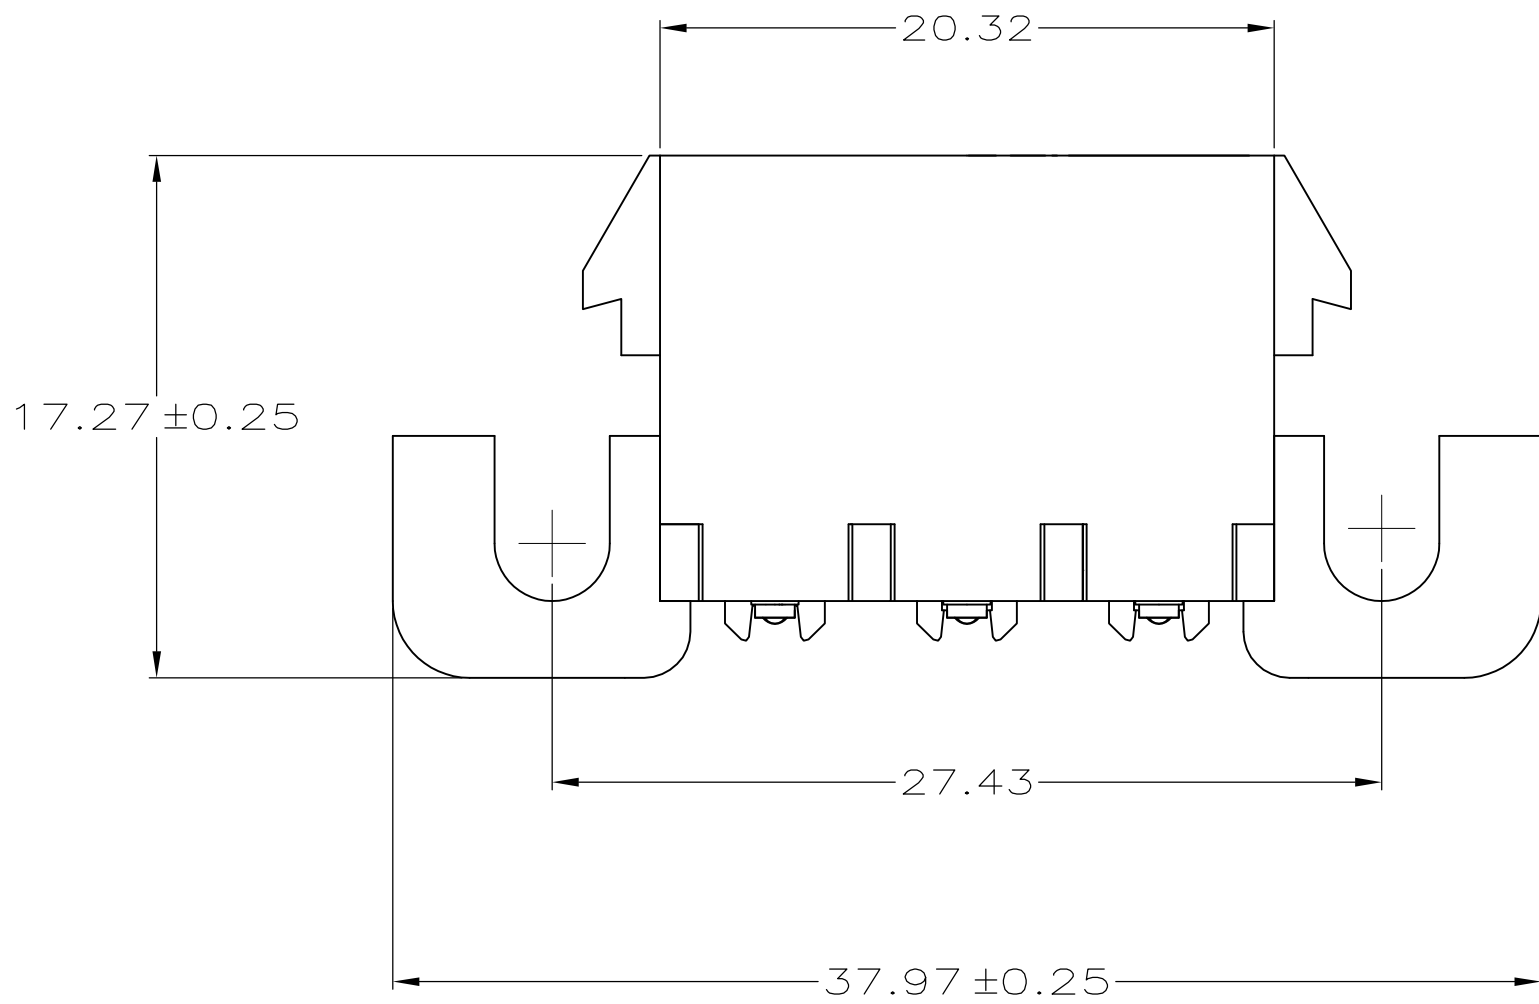



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
CM	00		B4	REVISED PER ECR-16-012254	01SEP2016	BW EW

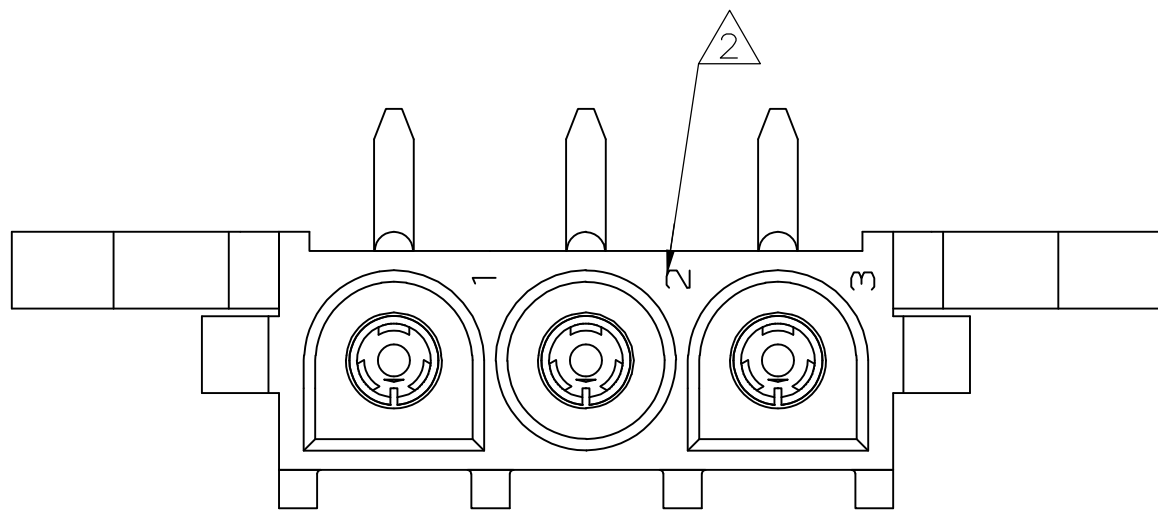

SECTION B-B

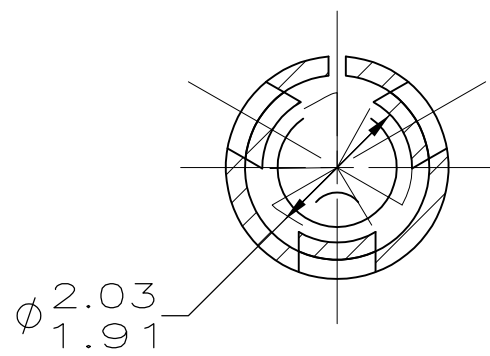

SECTION A-A
SCALE 10:1

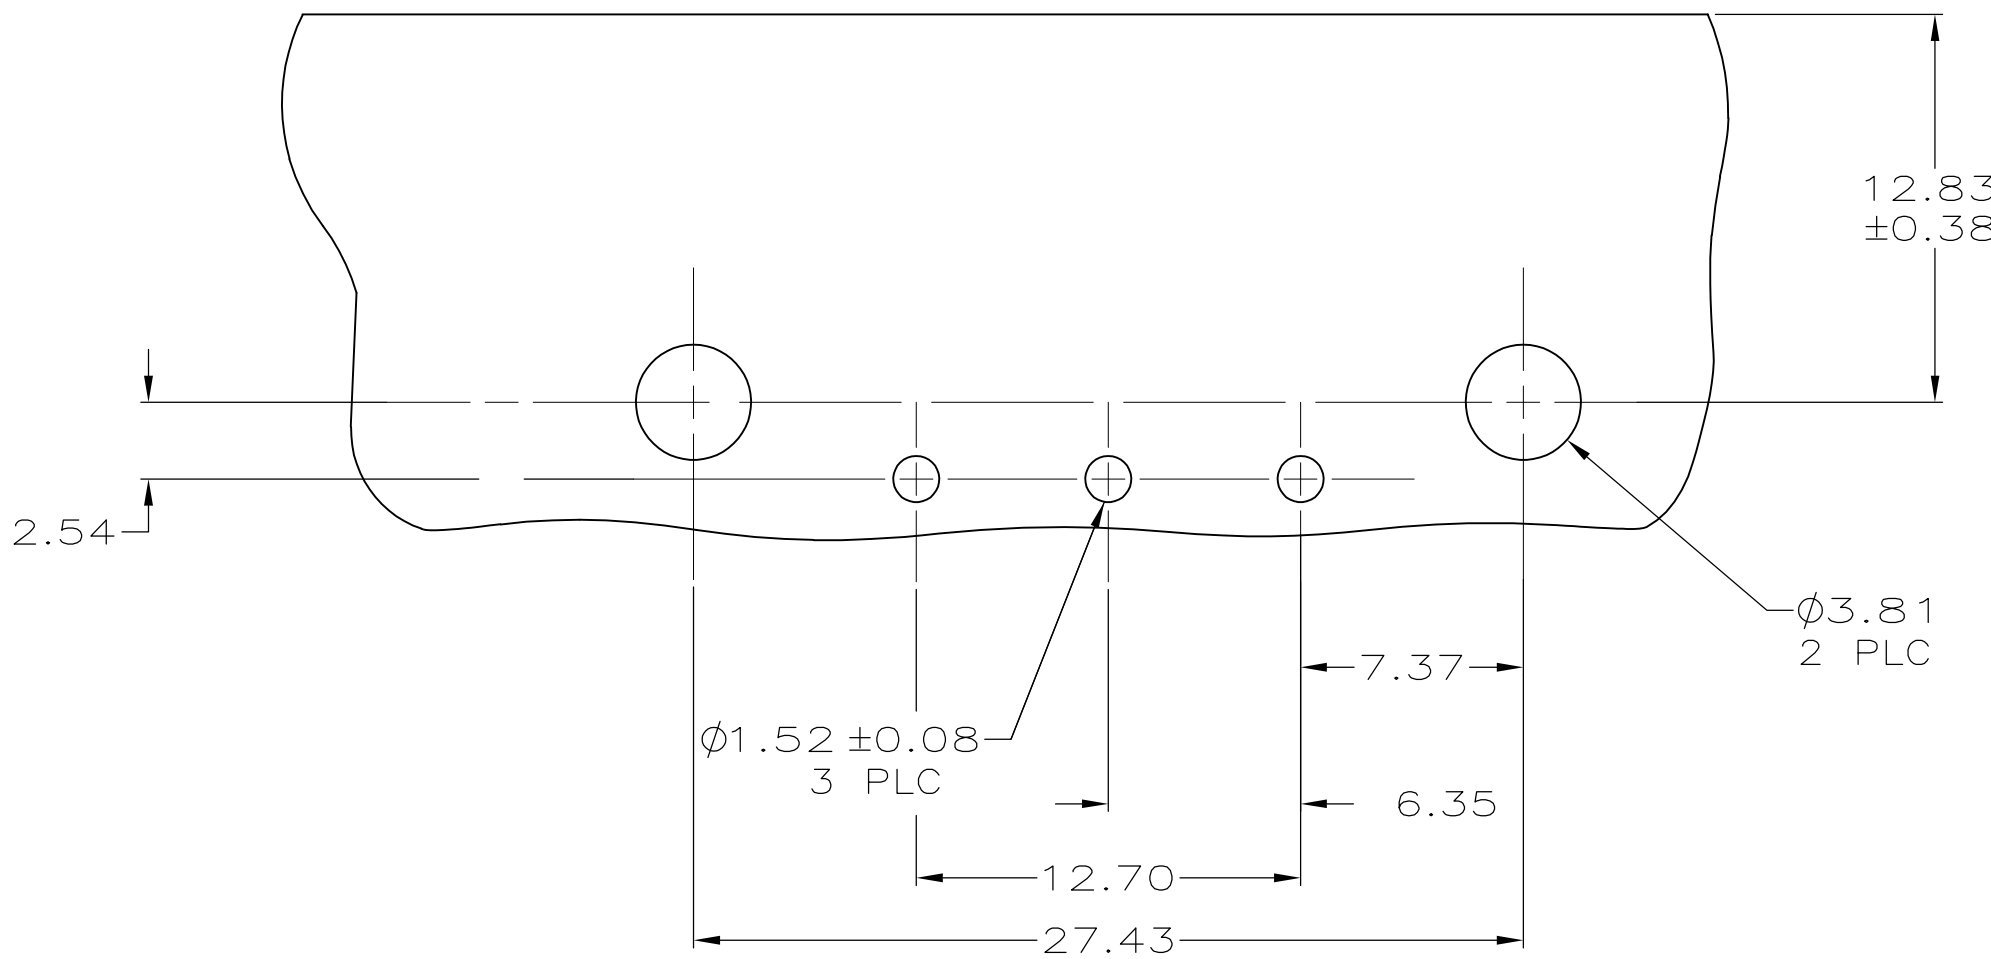

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

2.54	.100		
2.03	.080	37.97	1.495
1.91	.075	27.43	1.080
1.57	.062	20.32	.800
1.52	.060	17.27	.680
1.27	.050	12.83	.505
0.38	.015	12.70	.500
0.25	.010	9.14	.360
0.13	.005	7.37	.290
0.08	.003	6.35	.250
0.00127	0.000050	4.06	.160
0.00076	0.000030	3.81	.150
MM	IN	MM	IN
CONVERSION TABLE			

1. PARTS COMPLY WITH TE SOLDERABILITY SPECIFICATION 109-11-5.
2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. FLAMMABILITY V2 FOR THICKNESS 0.38mm, 1.5mm, qnd 3.0mm PER IEC 60695-11-10.
4. GLOW-WIRE FLAMMABILITY (GWI) 800°C FOR THICKNESS 0.38mm AND 0.75mm PER IEC 60695-2-12.
5. GLOW-WIRE FLAMMABILITY (GWI) 960°C FOR THICKNESS 1.5mm AND 3.0mm PER IEC 60695-2-12.
6. GLOW-WIRE IGNITION (GWIT) 825°C FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-2-13.
7. MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC 60335. (INL GLOW WIRE TEST 750°C WITHOUT FLAME)
8. PRELIMINARY PART NOT RELEASED FOR PRODUCTION.

3	PH BRZ,TIN	NYLON UL 94V-0	1586893-3
	PH BRZ,TIN	NYLON UL 94V-2	1586893-1
	CONTACT	HOUSING	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 14MAR2008 CHK D. COLEY 14MARCH2008 APVD D. COLEY 14MAR2008	TE Connectivity
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -	NAME SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT,3 POSITION, UNIVERSAL MATE-N-LOK(TM)
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT A100779C=1586893
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1 REV B4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1586893-3](#)