

STANDARD RIBBON CABLES ROUND 'N' FLAT

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS



Specifications:

Conductors: 28 AWG, 7/36 Tinned Copper

Color code: Gray with Red Edge

Insulation: PVC, .010" WALL

Thickness: .035" $\pm$.003"

Pitch: .050" $\pm$.003"

Shielding: Aluminium/Polyester Foil,

with Minimum 85% Coverage Tinned Copper Braid

Jacket: Black PVC, .030" nom Wall


Liner: Paper Liner Between Jacket and Braid

Temperature Rating: -20°C to +105°C (-4°F to 221°F)

Electrical:

Voltage: 300 Volts

Impedance: 75 ohms

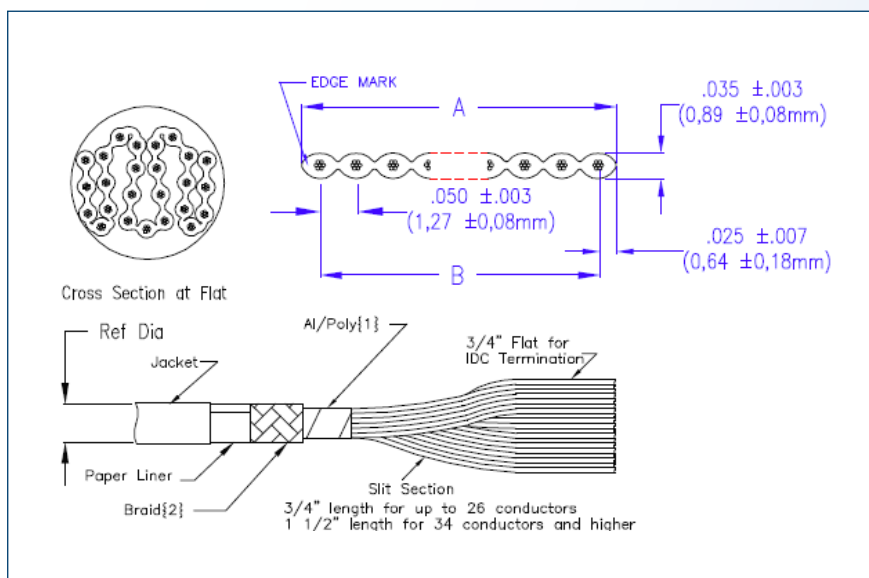

Part Numbers:

Part Number	No. Cond.	Width 'A'		Span 'B'		Ref. Dia. Inches
		Inches	(mm)	Inches	(mm)	
159-2801-009	9	.450	(11,43)	.400 $\pm$.007	(10,16 $\pm$ 0,18)	.270
159-2801-010	10	.500	(12,70)	.450 $\pm$.011	(11,43 $\pm$ 0,18)	.270
159-2801-015	15	.750	(19,05)	.700 $\pm$.011	(17,78 $\pm$ 0,28)	.300
159-2801-016	16	.800	(20,32)	.750 $\pm$.011	(19,05 $\pm$ 0,28)	.310
159-2801-020	20	1.000	(25,40)	.950 $\pm$.011	(24,13 $\pm$ 0,28)	.330
159-2801-024	24	1.200	(30,48)	1.150 $\pm$.011	(29,21 $\pm$ 0,28)	.350
159-2801-025	25	1.250	(31,75)	1.200 $\pm$.011	(30,48 $\pm$ 0,28)	.360
159-2801-026	26	1.300	(33,02)	1.250 $\pm$.011	(31,75 $\pm$ 0,28)	.360
159-2801-034	34	1.700	(43,18)	1.650 $\pm$.011	(41,91 $\pm$ 0,28)	.400
159-2801-036	36	1.800	(45,72)	1.750 $\pm$.015	(44,45 $\pm$ 0,38)	.410
159-2801-037	37	1.850	(47,00)	1.800 $\pm$.015	(45,72 $\pm$ 0,38)	.410
159-2801-040	40	2.000	(50,80)	1.950 $\pm$.015	(49,53 $\pm$ 0,38)	.430
159-2801-050	50	2.500	(63,50)	2.450 $\pm$.015	(62,23 $\pm$ 0,38)	.480
159-2801-060	60	3.000	(76,20)	2.950 $\pm$.015	(74,93 $\pm$ 0,38)	.520
159-2801-064	64	3.200	(81,28)	3.150 $\pm$.015	(80,01 $\pm$ 0,38)	.530