

4


3

2

1

used for:

4-40 UNC

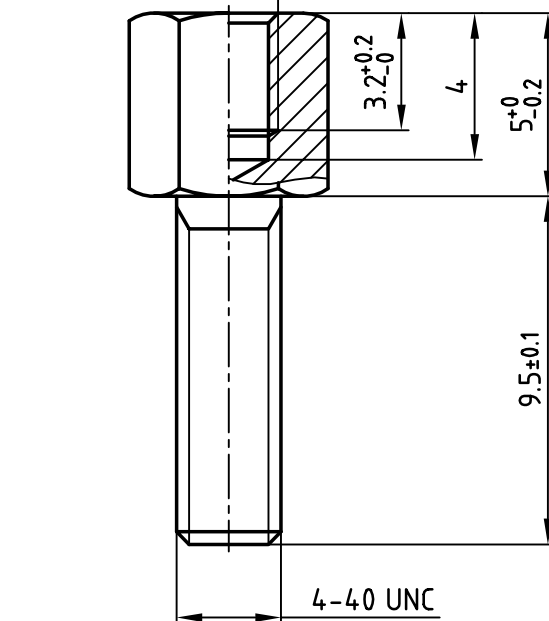

Part-No.

160X10269X-S5

160X00699A

Notes:

1. Part is splint and burrfree
2. Threaded core dimension 4-40 UNC: 2.257 ± 0.1
3. Test equipment measurement: 4-40 UNC-2B (thread inner)
4-40 UNC-2A (thread outer)

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance
ISO 2768-m



scale: 5:1
material: STAINLESS STEEL

2002	date	name
drawn	03.07.	Schmidt
appd.	03.07.	Mickenbecker
norm		
d-old		

CONEC[®]

title:
HEX BOLT
4-40 UNC / 4-40 UNC
14.5 mm long

dwg no: CAD/ 2000 DIN-A
4
sh: 1/1

product no: SEE TABLE

4

3

2

1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[160X10269X-S](#)