


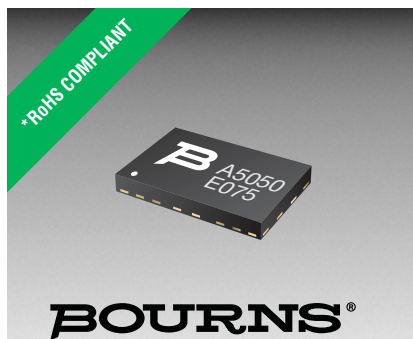

## Features

- Superior circuit protection
- Overcurrent and overvoltage protection
- Blocks surges up to rated limits
- High-speed performance
- Small SMT package
- Agency listing: 


## Applications

- Voice / VDSL cards
- Protection modules and dongles
- Process control equipment
- Test and measurement equipment
- General electronics

# TBU-CA Series - TBU® High-Speed Protectors

## General Information

The TBU-CA Series of Bourns® TBU® products are low capacitance single bidirectional high-speed protection components, constructed using MOSFET semiconductor technology, and designed to protect against faults caused by short circuits, AC power cross, induction and lightning surges.

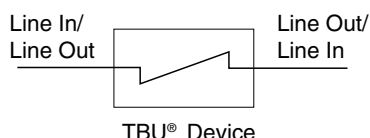

## Agency Listing

| Description |                      |
|-------------|----------------------|
| UL          | File Number: E315805 |

The TBU® high-speed protector placed in the system circuit will monitor the current with the MOSFET detection circuit triggering to provide an effective barrier behind which sensitive electronics will not be exposed to large voltages or currents during surge events. The TBU® device is provided in a surface mount DFN package and meets industry standard requirements such as RoHS and Pb Free solder reflow profiles.

## Absolute Maximum Ratings (@ T<sub>A</sub> = 25 °C Unless Otherwise Noted)

| Symbol            | Parameter                                                    | Part Number      | Value       | Unit |
|-------------------|--------------------------------------------------------------|------------------|-------------|------|
| V <sub>imp</sub>  | Peak impulse voltage withstand with duration less than 10 ms | TBU-CA025-xxx-WH | 250         | V    |
|                   |                                                              | TBU-CA040-xxx-WH | 400         |      |
|                   |                                                              | TBU-CA050-xxx-WH | 500         |      |
|                   |                                                              | TBU-CA065-xxx-WH | 650         |      |
|                   |                                                              | TBU-CA085-xxx-WH | 850         |      |
| V <sub>rms</sub>  | Continuous A.C. RMS voltage                                  | TBU-CA025-xxx-WH | 100         | V    |
|                   |                                                              | TBU-CA040-xxx-WH | 200         |      |
|                   |                                                              | TBU-CA050-xxx-WH | 250         |      |
|                   |                                                              | TBU-CA065-xxx-WH | 300         |      |
|                   |                                                              | TBU-CA085-xxx-WH | 425         |      |
| T <sub>op</sub>   | Operating temperature range                                  |                  | -55 to +125 | °C   |
| T <sub>stg</sub>  | Storage temperature range                                    |                  | -65 to +150 | °C   |
| T <sub>jmax</sub> | Maximum Junction Temperature                                 |                  | +125        | °C   |
| ESD               | HBM ESD protection per IEC 61000-4-2                         |                  | ±2          | kV   |

**BOURNS®**

**Asia-Pacific:** Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

**EMEA:** Tel: +36 88 520 390 • Fax: +36 88 520 211

**The Americas:** Tel: +1-951 781-5500 • Fax: +1-951 781-5700

**www.bourns.com**

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# TBU-CA Series - TBU® High-Speed Protectors

**BOURNS®**

## Electrical Characteristics (@ T<sub>A</sub> = 25 °C Unless Otherwise Noted)

| Symbol               | Parameter                                                                                         | Part Number                                                                    | Min. | Typ. | Max. | Unit |
|----------------------|---------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------|------|------|------|
| I <sub>trigger</sub> | Current required for the device to go from operating state to protected state                     | TBU-CAxxx-050-WH                                                               | 50   | 75   | 100  | mA   |
|                      |                                                                                                   | TBU-CAxxx-100-WH                                                               | 100  | 150  | 200  |      |
|                      |                                                                                                   | TBU-CAxxx-200-WH                                                               | 200  | 300  | 400  |      |
|                      |                                                                                                   | TBU-CAxxx-300-WH                                                               | 300  | 450  | 600  |      |
|                      |                                                                                                   | TBU-CAxxx-500-WH                                                               | 500  | 750  | 1000 |      |
| R <sub>device</sub>  | Series resistance of the TBU device                                                               | V <sub>imp</sub> = 250 V I <sub>trigger</sub> (min.) = 50 mA TBU-CA025-050-WH  |      | 13.3 | 15.3 | Ω    |
|                      |                                                                                                   | V <sub>imp</sub> = 250 V I <sub>trigger</sub> (min.) = 100 mA TBU-CA025-100-WH |      | 7.1  | 8.2  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 250 V I <sub>trigger</sub> (min.) = 200 mA TBU-CA025-200-WH |      | 4.2  | 4.8  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 250 V I <sub>trigger</sub> (min.) = 300 mA TBU-CA025-300-WH |      | 3.2  | 3.8  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 250 V I <sub>trigger</sub> (min.) = 500 mA TBU-CA025-500-WH |      | 2.6  | 3.0  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 400 V I <sub>trigger</sub> (min.) = 50 mA TBU-CA040-050-WH  |      | 14.3 | 16.5 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 400 V I <sub>trigger</sub> (min.) = 100 mA TBU-CA040-100-WH |      | 8.1  | 9.4  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 400 V I <sub>trigger</sub> (min.) = 200 mA TBU-CA040-200-WH |      | 5.2  | 6.0  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 400 V I <sub>trigger</sub> (min.) = 300 mA TBU-CA040-300-WH |      | 4.3  | 5.0  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 400 V I <sub>trigger</sub> (min.) = 500 mA TBU-CA040-500-WH |      | 3.6  | 4.2  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 500 V I <sub>trigger</sub> (min.) = 50 mA TBU-CA050-050-WH  |      | 15.7 | 18.0 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 500 V I <sub>trigger</sub> (min.) = 100 mA TBU-CA050-100-WH |      | 9.5  | 10.9 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 500 V I <sub>trigger</sub> (min.) = 200 mA TBU-CA050-200-WH |      | 6.6  | 7.5  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 500 V I <sub>trigger</sub> (min.) = 300 mA TBU-CA050-300-WH |      | 5.6  | 6.5  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 500 V I <sub>trigger</sub> (min.) = 500 mA TBU-CA050-500-WH |      | 5.0  | 5.7  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 650 V I <sub>trigger</sub> (min.) = 50 mA TBU-CA065-050-WH  |      | 17.7 | 20.3 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 650 V I <sub>trigger</sub> (min.) = 100 mA TBU-CA065-100-WH |      | 11.5 | 13.2 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 650 V I <sub>trigger</sub> (min.) = 200 mA TBU-CA065-200-WH |      | 8.6  | 9.8  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 650 V I <sub>trigger</sub> (min.) = 300 mA TBU-CA065-300-WH |      | 7.6  | 8.8  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 650 V I <sub>trigger</sub> (min.) = 500 mA TBU-CA065-500-WH |      | 7.0  | 8.0  |      |
|                      |                                                                                                   | V <sub>imp</sub> = 850 V I <sub>trigger</sub> (min.) = 50 mA TBU-CA085-050-WH  |      | 21.4 | 24.5 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 850 V I <sub>trigger</sub> (min.) = 100 mA TBU-CA085-100-WH |      | 15.2 | 17.4 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 850 V I <sub>trigger</sub> (min.) = 200 mA TBU-CA085-200-WH |      | 12.3 | 14.0 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 850 V I <sub>trigger</sub> (min.) = 300 mA TBU-CA085-300-WH |      | 11.3 | 13.0 |      |
|                      |                                                                                                   | V <sub>imp</sub> = 850 V I <sub>trigger</sub> (min.) = 500 mA TBU-CA085-500-WH |      | 10.7 | 12.2 |      |
| t <sub>block</sub>   | Time for the device to go from normal operating state to protected state                          |                                                                                |      |      | 1    | μs   |
| I <sub>Q</sub>       | Current through the triggered TBU® device with 50 Vdc circuit voltage                             |                                                                                | 0.25 | 0.50 | 1.00 | mA   |
| V <sub>reset</sub>   | Voltage below which the triggered TBU® device will transition to normal operating state           |                                                                                | 12   | 16   | 20   | V    |
| R <sub>th(j-l)</sub> | Junction to package pads - FR4 using recommended pad layout                                       |                                                                                |      | 98   |      | °C/W |
| R <sub>th(j-l)</sub> | Junction to package pads - FR4 using heat sink on board (6 cm <sup>2</sup> ) (1 in <sup>2</sup> ) |                                                                                |      | 40   |      | °C/W |

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# TBU-CA Series - TBU® High-Speed Protectors

**BOURNS®**

## Reference Application

The TBU® devices are general use protectors used in a wide variety of applications. The maximum voltage rating of the TBU® device should never be exceeded. Where necessary, an OVP should be employed to limit the maximum voltage. A cost-effective protection solution combines Bourns® TBU® protection devices with a pair of Bourns® MOVs. For bandwidth sensitive applications, a Bourns® GDT may be substituted for the MOV.

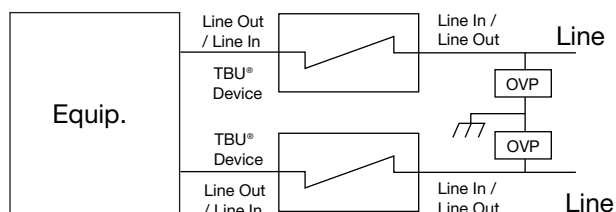

## Basic TBU Operation


The TBU® device, constructed using MOSFET semiconductor technology, placed in the system circuit will monitor the current with the MOSFET detection circuit triggering to provide an effective barrier behind which sensitive electronics are not exposed to large voltages or currents during surge events. The TBU® device operates in approximately 1  $\mu$ s - once line current exceeds the TBU® device's trigger current  $I_{TRIP}$ . When operated, the TBU® device restricts line current to less than 1 mA typically. When operated, the TBU® device will block all voltages including the surge up to rated limits.

After the surge, the TBU® device resets when the voltage across the TBU® device falls to the  $V_{RESET}$  level. The TBU® device will automatically reset on lines which have no DC bias or have DC bias below  $V_{RESET}$  (such as unpowered signal lines).


If the line has a normal DC bias above  $V_{RESET}$ , the voltage across the TBU® device may not fall below  $V_{RESET}$  after the surge. In such cases, special care needs to be taken to ensure that the TBU® device will reset, with software monitoring as one method used to accomplish this. Bourns application engineers can provide further assistance.

## Performance Graphs


### Typical V-I Characteristics (TBU-CA050-300-WH)

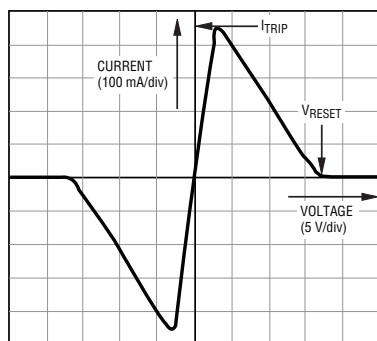


### Typical Trigger Current vs. Temperature

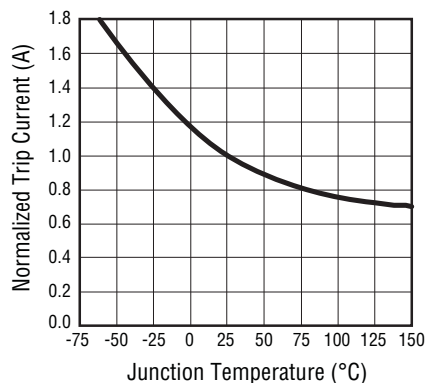

### Power Derating Curve

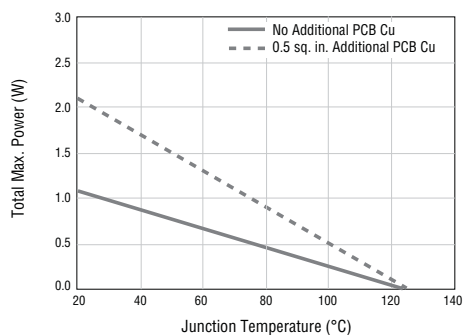

### Typical Resistance vs. Temperature

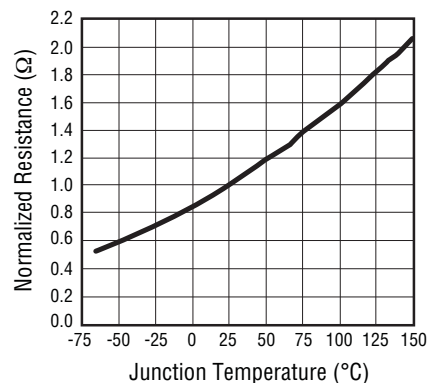

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

# TBU-CA Series - TBU® High-Speed Protectors


**BOURNS®**

## Product Dimensions

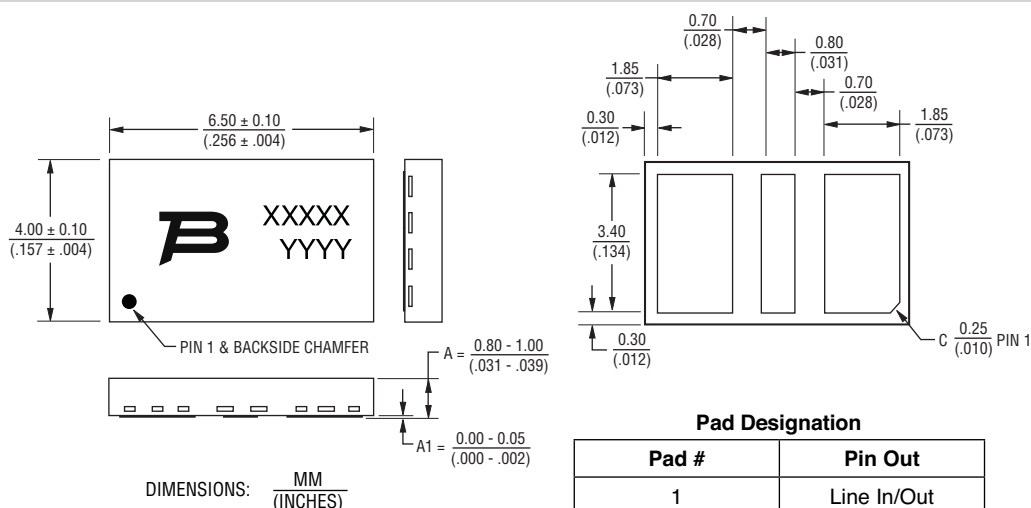

## Recommended Pad Layout

TBU® High-Speed Protectors have a 100 % matte-tin termination finish. For improved thermal dissipation, the recommended layout uses PCB copper areas which extend beyond the exposed solder pad. The exposed solder pads should be defined by a solder mask which matches the pad layout of the TBU® device in size and spacing. It is recommended that they should be the same dimension as the TBU® pads but if smaller solder pads are used, they should be centered on the TBU® package terminal pads and not more than 0.10-0.12 mm (0.004-0.005 in.) smaller in overall width or length. Solder pad areas should not be larger than the TBU® pad sizes to ensure adequate clearance is maintained. The recommended stencil thickness is 0.10-0.12 mm (0.004-0.005 in.) with a stencil opening size 0.025 mm (0.0010 in.) less than the solder pad size. Extended copper areas beyond the solder pad significantly improve the junction to ambient thermal resistance, resulting in operation at lower junction temperatures with a corresponding benefit of reliability. All pads should be soldered to the PCB, including pads marked as NC or NU but no electrical connection should be made to these pads. For minimum parasitic capacitance, it is recommended that signal, ground or power signals are not routed beneath any pad.

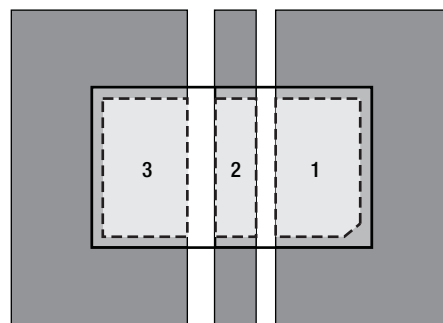


Dark grey areas show added PCB copper area for better thermal resistance.

# TBU-CA Series - TBU® High-Speed Protectors

**BOURNS®**

## Reflow Profile

| Profile Feature                                                                                                                                                                                       | Pb-Free Assembly                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Average Ramp-Up Rate (T <sub>smax</sub> to T <sub>p</sub> )                                                                                                                                           | 3 °C/sec. max.                  |
| Preheat <ul style="list-style-type: none"> <li>- Temperature Min. (T<sub>smin</sub>)</li> <li>- Temperature Max. (T<sub>smax</sub>)</li> <li>- Time (t<sub>smin</sub> to t<sub>smax</sub>)</li> </ul> | 150 °C<br>200 °C<br>60-180 sec. |
| Time maintained above: <ul style="list-style-type: none"> <li>- Temperature (T<sub>L</sub>)</li> <li>- Time (t<sub>L</sub>)</li> </ul>                                                                | 217 °C<br>60-150 sec.           |
| Peak/Classification Temperature (T <sub>p</sub> )                                                                                                                                                     | 260 °C                          |
| Time within 5 °C of Actual Peak Temp. (t <sub>p</sub> )                                                                                                                                               | 20-40 sec.                      |
| Ramp-Down Rate                                                                                                                                                                                        | 6 °C/sec. max.                  |
| Time 25 °C to Peak Temperature                                                                                                                                                                        | 8 min. max.                     |

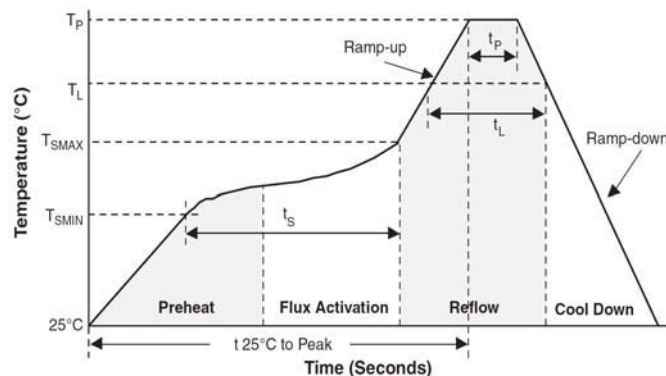

## How to Order

**TBU - CA 085 - 500 - WH**

TBU® Product \_\_\_\_\_

Series \_\_\_\_\_  
CA = Bi-Series

Impulse Voltage Rating \_\_\_\_\_  
025 = 250 V  
040 = 400 V  
050 = 500 V  
065 = 650 V  
085 = 850 V

Trigger Current \_\_\_\_\_  
050 = 50 mA  
100 = 100 mA  
200 = 200 mA  
300 = 300 mA  
500 = 500 mA

Hold to Trip Ratio Suffix \_\_\_\_\_  
W = Hold to Trip Ratio

Package Suffix \_\_\_\_\_  
H = DFN Package

## Typical Part Marking

MANUFACTURER'S TRADEMARK

**B**

PIN 1

XXXXXX

YYYY

MANUFACTURING DATE CODE


PRODUCT CODE

- 1ST DIGIT INDICATES PRODUCT FAMILY:  
A = TBU-CA SERIES
- 2ND & 3RD DIGITS INDICATE IMPULSE VOLTAGE:  
25 = 250 V    40 = 400 V    50 = 500 V  
65 = 650 V    85 = 850 V
- 4TH & 5TH DIGITS INDICATE TRIGGER CURRENT:  
05 = 50 mA    10 = 100 mA    20 = 200 mA  
30 = 300 mA    50 = 500 mA

6-MONTH PERIOD CODES:

|                  |                  |                  |
|------------------|------------------|------------------|
| A = JAN-JUN 2009 | C = JAN-JUN 2010 | E = JAN-JUN 2011 |
| B = JUL-DEC 2009 | D = JUL-DEC 2010 | F = JUL-DEC 2011 |

## Thermal Resistance vs Additional PCB Cu Area

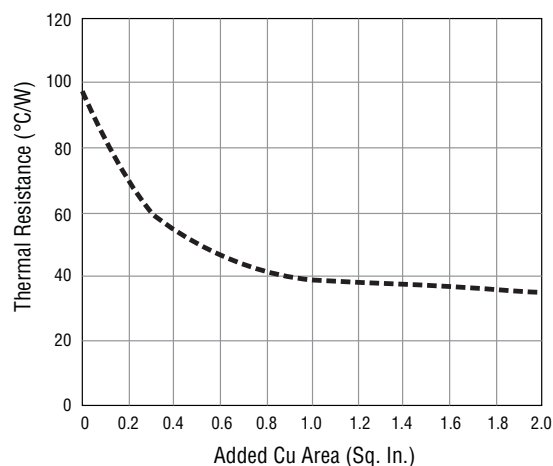

Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

# TBU-CA Series - TBU® High-Speed Protectors

**BOURNS®**

## Packaging Specifications

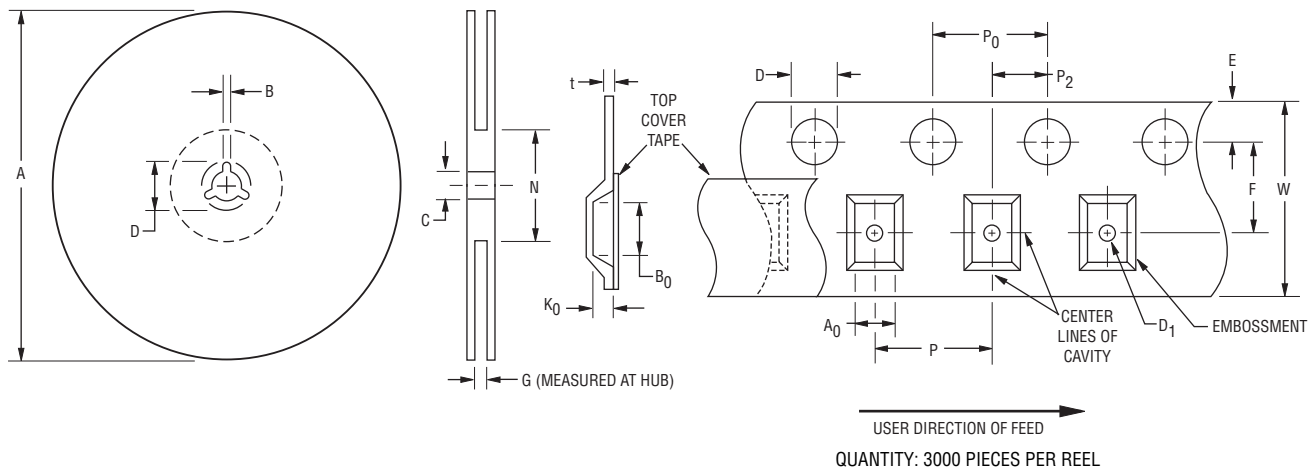

| A        |          | B      |        | C      |        | D      |      | G      | N       |
|----------|----------|--------|--------|--------|--------|--------|------|--------|---------|
| Min.     | Max.     | Min.   | Max.   | Min.   | Max.   | Min.   | Max. | Ref.   | Ref.    |
| 326      | 330      | 1.5    | 2.5    | 12.8   | 13.5   | 20.2   | -    | 16.5   | 102     |
| (12.835) | (13.002) | (.059) | (.098) | (.504) | (.531) | (.795) |      | (.650) | (4.016) |

| A0     |        | B0     |        | D      |        | D1     |        | E      |        | F      |        |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Min.   | Max.   | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   |
| 4.3    | 4.5    | 6.7    | 6.9    | 1.5    | 1.6    | 1.5    | -      | 1.65   | 1.85   | 7.4    | 7.6    |
| (.169) | (.177) | (.264) | (.272) | (.059) | (.063) | (.059) |        | (.065) | (.073) | (.291) | (.299) |
| K0     |        | P      |        | P0     |        | P2     |        | t      |        | W      |        |
| Min.   | Max.   | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   | Min.   | Max.   |
| 1.0    | 1.2    | 7.9    | 8.1    | 3.9    | 4.1    | 1.9    | 2.1    | 0.25   | 0.35   | 15.7   | 16.3   |
| (.039) | (.047) | (.311) | (.319) | (.159) | (.161) | (.075) | (.083) | (.010) | (.014) | (.618) | (.642) |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

REV. 06/15

"TBU" is a registered trademark of Bourns, Inc. in the United States and other countries.

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Bourns:

[TBU-CA025-050-WH](#) [TBU-CA025-100-WH](#) [TBU-CA025-200-WH](#) [TBU-CA025-300-WH](#) [TBU-CA025-500-WH](#) [TBU-CA040-050-WH](#) [TBU-CA040-100-WH](#) [TBU-CA040-200-WH](#) [TBU-CA040-300-WH](#) [TBU-CA040-500-WH](#) [TBU-CA050-050-WH](#) [TBU-CA050-100-WH](#) [TBU-CA050-200-WH](#) [TBU-CA050-300-WH](#) [TBU-CA050-500-WH](#) [TBU-CA065-050-WH](#) [TBU-CA065-100-WH](#) [TBU-CA065-200-WH](#) [TBU-CA065-300-WH](#) [TBU-CA065-500-WH](#) [TBU-CA085-050-WH](#) [TBU-CA085-100-WH](#) [TBU-CA085-200-WH](#) [TBU-CA085-300-WH](#) [TBU-CA085-500-WH](#) [PN-DESIGNKIT-27](#)