


# BNC Female Connector

161-9323

KOBICONN

BNC Female Connector

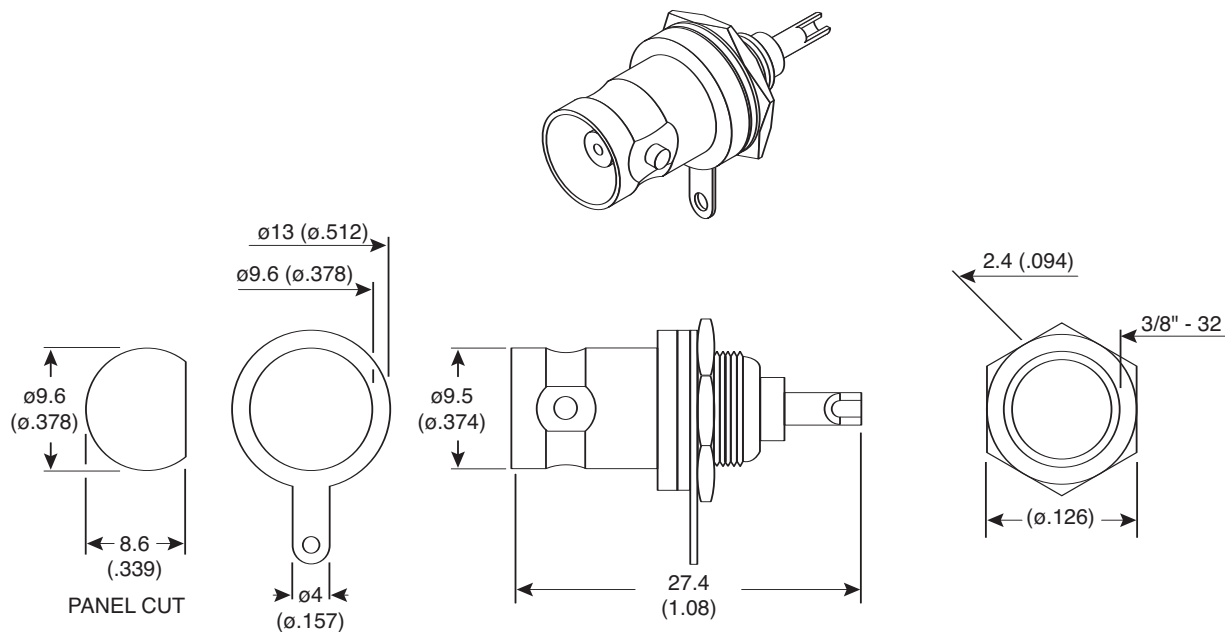

Dimensions: mm (In.)

| SPECIFICATIONS                          |                           |
|-----------------------------------------|---------------------------|
| Type:                                   | BNC chassis receptacle    |
| Voltage rating:                         | 500VAC                    |
| Contact resistance:                     | 3m $\Omega$ max @ 1A DC   |
| Insulation resistance:                  | 1G $\Omega$ min. @ 500VDC |
| Withstand voltage:                      | 1500VAC for 1 minute      |
| Frequency range:                        | Frequency range: 0~4GHz   |
| VSWR:                                   | 1.2 max. @ 0~2GHz         |
| Impedance:                              | 50 $\Omega$               |
| Insulator:                              | Delrin                    |
| Pin:                                    | gold plated brass         |
| Body:                                   | die cast nickel plated    |
| All other metal is nickel plated brass. |                           |

Date Last Revised: 1-14-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC- 300231

161-9323

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kobiconn:](#)

[161-9323](#)