

TCP3500 Series

3-phase 3500 W AC-DC Industrial PSU

The TCP3500 series is a universal 3-phase AC-DC converter with adjustable DC output and universal 3-phase AC input. Conduction cooling (No Fans) makes this power supply series suitable for a wide variety of Industrial Applications that can utilize conduction or liquid cooling, negating the use of fans.

Emphasis is given on reliability and long life. Parallel operation is possible up to 16 units (50.4 kW). Passive or active current share system can be selected.

The PSU includes DSP which enables monitoring of electrical parameters (including input voltage of all 3 phases) and controlling the PSU from system controller.

An RS485 bus is used for command, monitoring and diagnostic information that can be supplied to a system controller.



Key Features & Benefits

- World-Wide 3-phase Input Voltage Range (nom. 115 - 277 V / 200 - 480 V)
- Power Factor > 0.94
- High Power Density 16 W/in³
- 94% Typical Efficiency
- Parallel Operation up to 16 Units (50.4 kW)
- Cold-Plate Cooling System
- -25 to 50 °C of Cold-Plate Surface,
-25 to 70 °C of Ambient Air Temperature
- Possibility to Install 4 Units in 2U 19" Rack
- Advanced Performance for Fast Dynamic and Pulsed Load – up to 100 kHz (Optional)
- RS485 Interfaces
- Wide Adjustable Output Voltage Range
- Fast Output Voltage Set Response (5 ms)
- Active Current Sharing



bel POWER
SOLUTIONS &
PROTECTION
a bel group

belpowersolutions.com

1. MODEL SELECTION

MODEL	INPUT VOLTAGE RANGE	NOMINAL OUTPUT VOLTAGE	OUTPUT VOLTAGE RANGE	MAX OUTPUT CURRENT	MAX OUTPUT POWER	AVAILABILITY
TCP3500-H048G	180 – 528 Vrms, 50/60 Hz	48 V	Adjustable 10 – 50 VDC	73 ADC or pulse ¹	3500 W	Mass production
TCP3500-1048G	180 – 528 Vrms, 50/60 Hz	48 V	Adjustable 10 – 50 VDC	73 ADC	3500 W	Mass production
TCP3500-H060G	180 – 528 Vrms, 50/60 Hz	60 V	Adjustable 20 – 60 VDC	65 ADC or pulse ¹	3500 W	Consult factory
TCP3500-1024G	180 – 528 Vrms, 50/60 Hz	24 V	Adjustable 10 – 30 VDC	145 ADC	3500 W	Consult factory

¹ PSU model with pulse load operation capability 0 – 100 kHz, 0 – 100% Duty, 0 A/Iout_max.

2. INPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Input Voltage	3-phase (L-N / L-L), 3 wires + PE	115 - 277 / 200 - 480			V
	Permitted variation (L-N / L-L)	104 - 305 / 180 - 528			V
Input Frequency		50/60			Hz
	Permitted variation	47		63	Hz
Input Current	per Line at 3 x 180 V (line to line)			14	Arms
Fuse	3 x 20 A, Fast acting				

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Output Voltage	Adjustable or fixed (see Model Selection table)				
Output Power Rating	High Line and Low Line		3500		W
Output Current	Fixed or Adjustable (60 – 100%)				
Efficiency	Typical, High Line and load above 40%		94		%
Voltage Setting Accuracy			± 0.5		%
Line Regulation	$I_o = 0.5 * I_{o_nom}$		±0.5		%
Load Regulation			±0.3		%
Thermal Drift			±0.02		%/°C
Transient Response	load variation 10-100% and back:		±5		%
	Recovery time:			2	ms
	load variation 50-100% and back:		±3		%
	Recovery time:			0.4	ms
Ripple	Vout_nom (BW 20 MHz)			1.5	%
Output Start Up				2	s
Rise Time				250	ms

4. PROTECTION SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Over Temperature Protection	Cooling Plate surface (PSU bottom side)	55			°C
Input Under Voltage Protection	3-phase (L-N / L-L)			104 / 180	V
Input Over Voltage Protection	3-phase (L-N / L-L)	305 / 528			V
Reversed Sense Output Protection	Latch type				
Output Under Voltage Protection	Latch type – Fixed HW, based on Nominal Output Voltage	10		18	%
Output Over Voltage Protection	Latch type – Fixed HW, based on Nominal Output Voltage Resettable – Floating SW, based on Output Voltage Set Point (configurable)	115 +4		125 +6	% V
Output Over Current	PSU starts operate as current source, based on Maximal Output Current Latch type – Fixed SW, based on Maximal Measured Output Current	104 114		112 122	% %
Short Circuit Protection	Fast Acting Fuse for min. 120% of Rated Output Current				
Alarms	Input under and over voltage Output under and over voltage Output overload Over temperature				

5. SAFETY, REGULATORY AND EMC SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION		SPECIFICATION
Emission Requirements			
Radiated Emission	EN55011		Class A
Conducted Emissions	EN55011		Class A
Immunity Requirements			
Electrostatic Discharge	IEC 61000-4-2	Level 4: ±8 kV contact, ±15 kV air	Criterion B
Radiated Electromagnetic Field	IEC 61000-4-3	10 V/m	Criterion B
Electrical Fast Transient (EFT)/Burst	IEC 61000-4-4	Level 3: ±2/1 kV	Criterion B
Surge Immunity		Level 3: ±1 kV DM, ±2 kV CM	Criterion B
RF Conducted Immunity	Level 3: 10 V		Criterion A
Useful Life Assessment	>5 years life at ambient temperature of +70 °C and case temperature 55 °C >10 years of predicted electrolytic capacitor life at 55 °C of case temperature and 100% load.		

6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Humidity	Operating range according IEC 60068-2-78	10		90	RH
Operating Temperature	Cold-plate cooling: of base plate of ambient air temperature	-25 -25		+55 +70	°C
Storage Temperature		-40		+85	°C

7. MONITORING AND CONTROL

7.1 GUI (GRAPHIC USER INTERFACE) AND RS485 COMMUNICATION PROTOCOL

Bel Power Solutions provides a Windows® XP/Vista/Win7 compatible Bel Power Solutions I²C User Interface allowing the programming and monitoring of the TCP3500 power supply. The I²C Utility can be downloaded from: belpowersolutions.com.

For detailed information please see Communication Manual (BCA.00129) or contact Bel Power Solutions sales representative.

7.2 LED SIGNALING

LED NAME	COLOR	STATUS	OPERATING CONDITIONS
AC-OK	Green	ON Blinking	AC Input Voltage is within operation range FW upgrade via RS485-1
DC-OK	Green	ON	Output is Enabled and Operational
OT/FAIL	Orange	ON	Over Temperature conditions inside the unit or FAIL appeared (e.g. Overload)

8. CONNECTORS

PARAMETER	DESCRIPTION / CONDITION
Input Connector	4-pin, Pitch 7.62 mm (Weidmüller 1081850000, see Figure 1)
Output Connector	Bus bars, screw size M4, see Fig.1
Signal Input Connector	15-pin D-SUB Male (Würth Elektronik, 61801529221, see Figure 1)
Signal Output Connector	15-pin D-SUB Female (Würth Elektronik, 61801529321, see Figure 1)

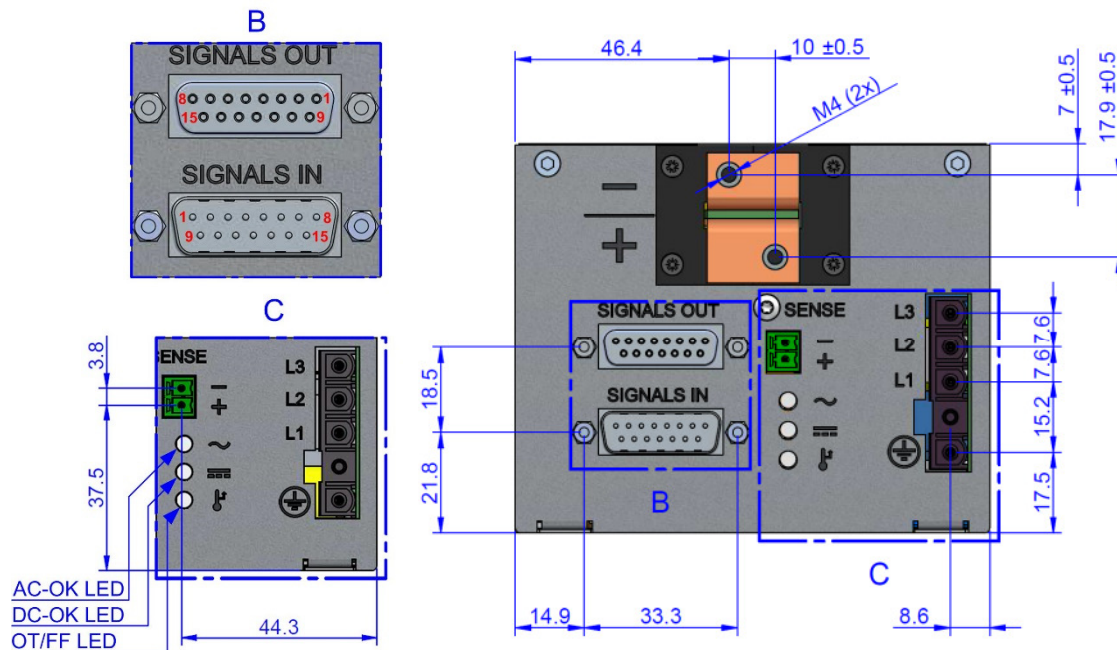


Figure 1. Rear View - Connectors Position

8.1 INPUT POWER CONNECTOR: PINOUT

SIGNAL NAME	PIN #	TYPE	RECOMMENDED WIRES	V MAX I MAX
Earth		Earth / Chassis	Min. 2.5 mm ²	528 Vrms (line to line) 16 Arms (per line)
AC Line 1	L1	Input Power AC Fused	Min. 2.5 mm ²	
AC Line 2	L2	Input Power AC Fused	Min. 2.5 mm ²	
AC Line 3	L3	Input Power AC Fused	Min. 2.5 mm ²	

Connector type: Weidmüller 1081850000
Mating part: Weidmüller 1173520000

8.2 POWER OUTPUTS CONNECTOR: +/- BUSBARS

SIGNAL NAME	PIN #	TYPE	SIGNAL REFERENCE	LOW LEVEL HIGH LEVEL	V MAX I MAX
Vout+	+	Output Power DC	Vout-	-	50 VDC 73 ADC
Vout-	-	Output Power DC	-	-	

Connector type: Busbar see Figure 1
Mating part: Ring terminal for M4 screw, with appropriate cross section for wire.

8.3 SIGNAL INPUT CONNECTOR: PINOUT

SIGNAL NAME	PIN #	TYPE	SIGNAL REFERENCE	LOW LEVEL HIGH LEVEL	V MAX I MAX
RS485-1A	1	RS485 Half Duplex, Differential pair 1	RS485-1B	+/-60 mA @ 60 Ω, 0 pF ²	-7 to 12 VDC 8 mA
RS485-2A	2	RS485 Half Duplex, Differential pair 2	RS485-2B	+/-60 mA @ 60 Ω, 50 pF ²	-7 to 12 VDC 8 mA
ADDR-INIT IN	3	The unit's address change required	SRTN	<0.4 VDC >2.5 VDC	3.6 VDC 0.2 mA
IN OK	4	AC Power Fail Warning - open collector, external pull-up needed to max. 7 V	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
OUT OK	5	Output Voltage Fault - open collector, external pull-up needed to max. 7 V	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
INHIBIT	6	Output Inhibit - Open circuit or "High" to SRTN shuts OFF Vout	SRTN	<0.4 VDC >2.5 VDC	3.6 VDC 0.2 mA
ENABLE	7	Power Supply Enable pin – for unit enable short this pin to SRTN	SRTN	<0.4 VDC >2.5 VDC	3.6 VDC 0.2 mA
SRTN ¹	8	Signal Return	-	-	-
RS485-1B	9	RS485 Half Duplex, Differential pair 1	RS485-1B	+/-60 mA @ 60 Ω, 50 pF ²	-7 to 12 VDC 8 mA
RS485-2B	10	RS485 Half Duplex, Differential pair 2	RS485-2B	+/-60 mA @ 60 Ω, 50 pF ²	-7 to 12 VDC 8 mA
Not Connected	11	-	-	-	-
OT/FAIL	12	Over Temperature /PSU Fail, open collector, external pull-up needed to max. 7 VDC	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
PS-PRESENT	13	Power Supply Seated – signal internally connected through 10 Ohm resistor to SRTN	SRTN	-	1 VDC 100 mA
ACSH	14	Active Current Share	SRTN	0.2 VDC 5.0 VDC	7 VDC 0.7 mA
Margin	15	Optional – analog signal for Output Voltage adjustment – Not connected	-	-	-

¹ SRTN and Vout- are connected together inside the power supply

² 120Ω resistors connection required between RS485-xA and RS485-xB on both sides externally

Connector type: Würth Elektronik, 61801529221
Mating part: Würth Elektronik, 61801529321

8.4 SIGNAL OUTPUT CONNECTOR: PINOUT

SIGNAL NAME	PIN #	TYPE	SIGNAL REFERENCE	LOW LEVEL HIGH LEVEL	V MAX I MAX
RS485-1A	1	RS485 Half Duplex, Differential pair 1	RS485-1B	+/-60 mA @ 60 Ω , 50 pF ²	-7 to 12 VDC 8 mA
RS485-2A	2	RS485 Half Duplex, Differential pair 2	RS485-2B	+/-60 mA @ 60 Ω , 50 pF ²	-7 to 12 VDC 8 mA
ADDR-INIT OUT	3	The unit's address change accepted	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
IN OK	4	AC Power Fail Warning - open collector, external pull-up needed to max. 7 V	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
OUT OK	5	Output Voltage Fault - open collector, external pull-up needed to max. 7 V	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
INHIBIT	6	Output Inhibit - Open circuit or "High" to SRTN shuts OFF Vout	SRTN	<0.4 VDC >2.5 VDC	3.6 VDC 0.2 mA
ENABLE	7	Power Supply Enable pin – for unit enable short this pin to SRTN	SRTN	<0.4 VDC >2.5 VDC	3.6 VDC 0.2 mA
SRTN ¹	8	Signal Return	-	-	-
RS485-1B	9	RS485 Half Duplex, Differential pair 1	RS485-1B	+/-60 mA @ 60 Ω , 50 pF ²	-7 to 12 VDC 8 mA
RS485-2B	10	RS485 Half Duplex, Differential pair 2	RS485-2B	+/-60 mA @ 60 Ω , 50 pF ²	-7 to 12 VDC 8 mA
NC	11	-	-	-	-
OT/FAIL	12	Over Temperature /PSU Fail, open collector, external pull-up needed to max. 7 VDC	SRTN	<0.4 VDC Pull up	7 VDC 20 mA
PS-PRESENT OUT	13	Power Supply Seated – last unit in string will pull down this signal (external short to SRTN) and informs Master Controller that all units in string are seated and connected	SRTN	<0.4 VDC >2.5 VDC	3.6 VDC 0.2 mA
ACSH	14	Active Current Share	SRTN	0.2 VDC 5.0 VDC	7 VDC 0.7 mA
Margin	15	Optional – analog signal for Output Voltage adjustment - Not Connected	SRTN	-	-

¹ SRTN and Vout- are connected together inside the power supply

Connector type: Würth Elektronik, 61801529321

Mating part: Würth Elektronik, 61801529221

8.5 SIGNAL OUTPUT CONNECTOR: PINOUT

SIGNAL NAME	PIN #	TYPE	SIGNAL REFERENCE	LOW LEVEL HIGH LEVEL	V MAX I MAX
SENSE+	+	Sense line for Vout+ – voltage drop compensation for positive pole	Vout+	-	-
SENSE-	-	Sense line for Vout- – voltage drop compensation for positive pole	Vout-	-	-

Connector type: Phoenix Contact, MC 1.5/ 2-G-3.81

Mating part: Phoenix Contact, MC 1.5/ 2-ST-3.81

9. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Dimensions (W x D x H)	See Figure 2		400 x 103 x 85 15.7 x 4 x 3.3		mm in
Weight	Single PSU		6.5		kg
Cooling	Liquid cooled cold-plate, power dissipation ~300 W/PSU Recommended water flow rate: 2 – 4 liters/min. (depends on the cooling plate design)				
Insulation	Input to Output: Input to Chassis:	3.0 1.5			kVAC
Enclosure	IP20				

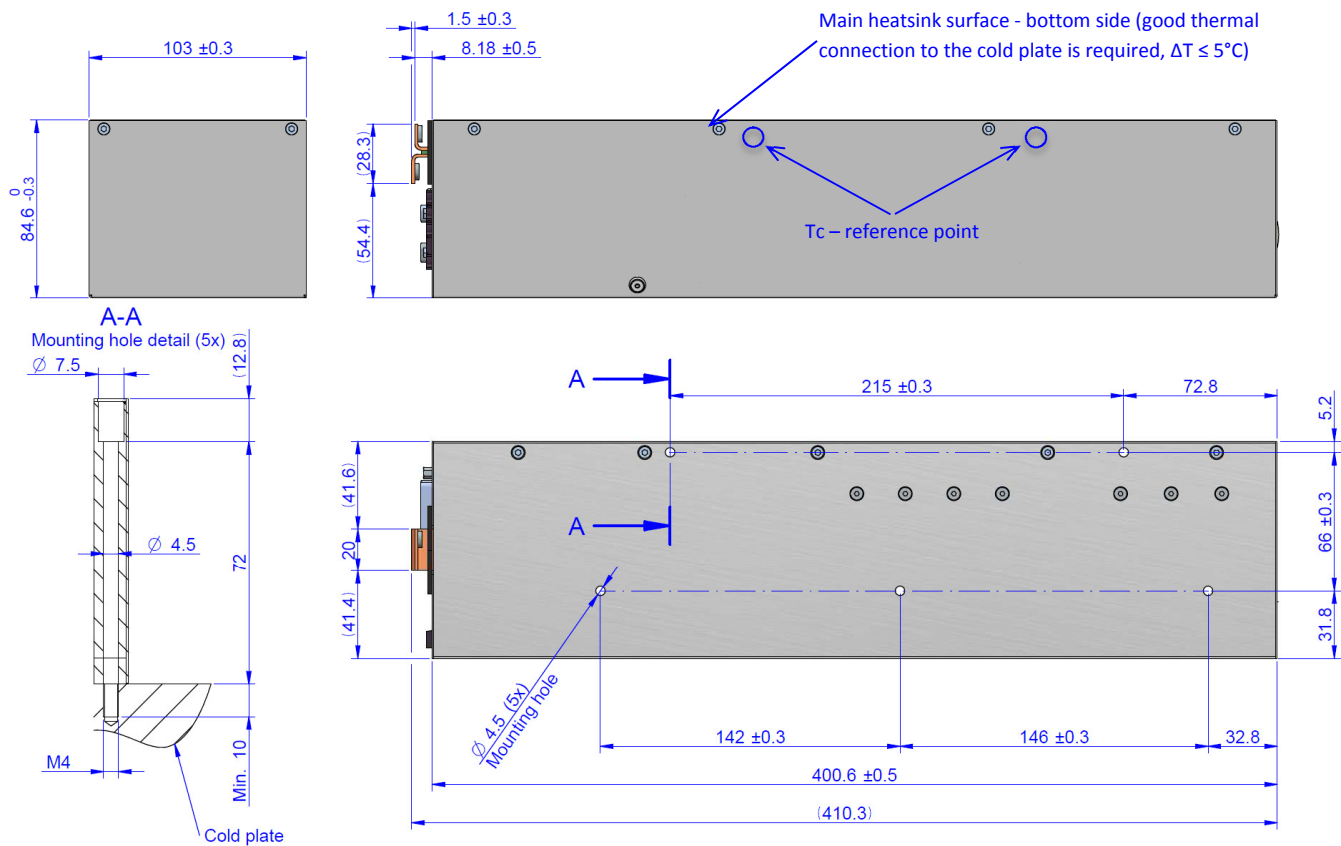



Figure 2. Mechanical Dimensions

10. ACCESSORIES

ITEM	DESCRIPTION	ORDERING PART NUMBER	SOURCE
	Bel Power Solutions I²C User Interface Windows XP/Vista/7 compatible GUI to program, control and monitor TCP3500 PSU (and other I²C units)	N/A	belpowersolutions.com
	RS485/USB Connector		
	Single Signal Connector (with hardware links for signals)		
	Parallel Signal Connector		

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.
TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel Power Solutions:](#)

[TCP3500-1048G](#) [TCP3500-H048G](#) [TCP3500-H060G](#)